

ONERA

**What Happened, and Why:
Towards an Understanding of
Human Error Based on
Automated Analyses of
Incident Reports
Volume I**

Nicolas P. Maille, PhD
ONERA

Thomas A. Ferryman
Battelle

Loren J. Rosenthal
Battelle

Michael G. Shafto, PhD
NASA Ames Research Center

Irving C. Statler, PhD
NASA Ames Research Center

April 1, 2005

Table of Contents

1	BACKGROUND	5
2	THE CONTEXT OF THIS STUDY	9
	2.1 RESEARCH OBJECTIVES	10
	2.2 OUTLINE OF THIS RESEARCH REPORT	10
3	THE INCIDENT MODEL	11
	3.1 DEFINITIONS	12
	3.2 THE STATE/TRANSITION REPRESENTATION OF THE INCIDENT MODEL	13
4	PARAMETERS FOR THE DESCRIPTION OF STATES AND TRANSITIONS	16
	4.1 HIGH LEVEL STRUCTURE OF THE THREE CODIFICATIONS	17
	4.2 A “FULL AND COMPLETE” SET OF PARAMETERS	19
5	THE SCENARIO	20
6	INTERIM CONCLUSIONS	25
7	A CASE STUDY	26
	7.1 THE SAMPLE AND THE CLUSTERING TOOL	26
	7.2 FORMAL CODIFICATION OF THE 40 REPORTS	27
	7.3 CLUSTERING ON THE WHAT	28
	7.3.1 <i>First step: Clustering on the Outcome</i>	28
	7.3.2 <i>Second step: Clustering on the Context</i>	29
	7.4 AN ATTEMPT TO CAPTURE THE WHY	30
	7.5 CONCLUSIONS OF THE CASE STUDY	31
8	CORRELATIONS BETWEEN OUTCOMES AND CONTEXTS	31
	8.1 INTRODUCTION	31
	8.2 GOALS	32
	8.3 APPROACH	32
	8.3.1 <i>Data/Taxonomies</i>	32
	8.4 RESULTS	35
	8.4.1 <i>CART Analyses</i>	35
	8.4.2 <i>Crosstabulation Analysis</i>	36
	8.5 LESSONS LEARNED	37
9	ON THE CODIFICATION OF THE WHY	39
10	SUMMARY AND PROJECTIONS	46
11	REFERENCES	47
	APPENDIX A: CURRENT TOOLS	51
	APPENDIX B: THE CINQ-DEMI METHODOLOGY	52
	APPENDIX C: TAXONOMIC STRUCTURE FOR CODIFICATION	59
	C-1 HIGH LEVEL STRUCTURE OF THE THREE CODIFICATIONS	60
	C-1.1 <i>ASRS Codification</i>	60
	C-1.2 <i>The X-Form</i>	63

<i>C-1.3 Cinq-Demi codification</i>	66
C-2 COMPARISON OF THE THREE STRUCTURES	67
C-3 A “FULL AND COMPLETE” SET OF PARAMETERS	68
APPENDIX D: MAPPING PARAMETERS TO A “FULL AND COMPLETE” SET	71
APPENDIX E: SITUATION AWARENESS	95
E-1. INTRODUCTION	95
E-2 - SITUATION AWARENESS, PREDICTION, AND ACTIVE COGNITION	96
E-3 - SITUATION AWARENESS RESEARCH	97
E-3 - THE CYCLIC NATURE OF SA	98

Figures

Figure 1- Example of Parameter.....	13
Figure 2 – A State/Transition Decomposition of an Incident Report	14
Figure 3 – The Incident Model.....	16
Figure 4 – Consolidated Structure of ASRS Codifications.....	19
Figure 5 – The Framework of the Scenario Concept	21
Figure 6 – The Relation of Scenario to the Incident Model	23
Figure 7 – Relations between the Scenario and the Categories of Descriptors.....	25
Figure 8 Process for Second Stage Analysis.....	45
Figure B-1. A View on Accident Prevention	52
Figure B-2. Grid of Aircraft Maneuver Events (GAME)	53
Figure B-3. Grid of Aircraft Sensitivity to Perturbations (GASP)	53
Figure B-4. Grid of Operator Failures (GOOF).....	54
Figure B-5. Grid of Amplifiers of Risk of Errors (GARE).....	55
Figure B-6. Rapid Analysis Fault Table (RAFT)	57
Figure C-1 - The categories of information, the sections of the ASRS form, and the Incident Model.....	62
Figure C-2 - Explicit links in the ASRS Form	62
Figure C-3 - The categories of information, the X-Form sections, and the Incident Model.....	65
Figure C-4 - The links between the sections of the X-form.....	65
Figure C-5 - The categories of information, the sections of the Cinq-Demi codification, and the Incident Model	66
Figure C-6 - Main relations between the Scenario and the categories of information	69
Figure E-1 - The Perception-action Cycle (Neisser 1976)	99

Acknowledgements

The topics and content of this report are the products of collaboration among several of the participants and contributors to the Aviation System Monitoring and Modeling project of NASA's Aviation Safety and Security Program. As the manager of that project, I take this opportunity to acknowledge their contributions made over many years and to thank them. Special recognition here goes to those who contributed to the approach and studies for automated analyses of textual data that are reported here.

First of all, this work represents one of the several products of a long and successful collaboration between NASA and the Office National d'Études et de Recherches Aérospatiales (ONERA) in research on human factors in aeronautical operations and incidents. During 2002-2003, ONERA and the French Ministry of Defense sponsored a one-year stay of one of ONERA's research scientists, Dr. Nicolas Pascal Maille, at the NASA Ames Research Center. The study reported here is, in very large part, the work of Dr. Maille during that stay. I am grateful to Dr. Claude Barrouil and Dr. Laurent Chaudron of ONERA-Toulouse for their constant support and encouragement.

The development of the tools for effective automated analysis of text described in this report has been accomplished by the exceptional team at Battelle's Pacific Northwest Division under the Leadership of Dr. Thomas Ferryman, including Dr. Alan Brothers, Ms. Melissa Matzke, Mr. Brett Matzke, Dr. Christian Posse, Ms. Andrea Swickard, and Ms. Amanda White.

The early formative experiments and discussions that preceded this study were heavily based on analyses conducted using the Cinq-Demi GRID methodology referenced in this report. I am very grateful to Cinq-Demi's researchers and developers of the GRID approach, Général Jean-Claude Wanner and Pierre Lecomte and Mme. Nicole Wanner, for their contributions and their always stimulating perspectives on this work.

*Irving C. Statler
ASMM Project Manager
Irving.C.Statler@nasa.gov*

1 Background

Air transportation, the most rapidly growing mode of transportation, is also one of the safest modes of travel. Nevertheless, the public demands that safety levels continuously improve and that the absolute number of aviation accidents continue to decline, even as air traffic levels increase.

NASA's Aviation Safety Program (AvSP) was initiated in 2000 to develop the enabling technologies that could, if implemented, reduce the aircraft accident rate by a factor of five within ten years and by a factor of ten within twenty years. One of the projects within the AvSP, the Aviation System Monitoring and Modeling (ASMM) project, addresses the need to provide decision makers with the tools for safety improvement by identifying and correcting the predisposing conditions that could lead to accidents. The objective of the ASMM project is to develop technologies that will enable proactive management of safety risk from a system-wide perspective.¹

A proactive approach to identifying and alleviating life-threatening conditions in the aviation system entails a well-defined process of identifying threats, evaluating causes, assessing risks, and implementing appropriate solutions. This process is not a trivial undertaking. It requires continuous monitoring of system performance in a non-punitive culture; learning from normal operational experience; comparing actual performance to expected performance; identifying the precursor events and conditions that foreshadow most accidents; designing appropriate interventions to minimize the risk of their occurrence; and having a system in place to monitor the efficacy of the interventions.

At each of these stages, airline domain experts, air traffic managers, and other providers of aviation services must make key decisions. The ASMM project provides computational tools that focus the attention of human experts on the most significant events, and that help them identify the factors that distinguish unsafe operations from routine operations. The purpose of the ASMM tools is to convert a bounty of raw aviation operational data drawn from many sources—aircraft flight data recorders, ATC radar tracks, maintenance logs, weather records, and aviation safety incident reports—into insightful interpretations of the health and safety of the National Aviation System (NAS). Computational sciences and information technology can be used to cope with the great disparity of formats and types of these data sources that include continuous and discrete quantitative data and textual data. However, when it comes to making decisions about aviation safety, the best use of computer sciences is to help the human gain insight into operations. Even the most advanced adaptations of information technologies and computer sciences cannot replace the human expert with automated decisions.

Identifying and recognizing precursors of the next accidents pose considerable challenges that are being addressed in many domains, including nuclear, medical, chemical, pharmaceutical, and space missions, as well as aviation. [Phimister (2003)] Each domain may have its own definition

¹ We use the term "system" in this report to include all aspects of air transportation including, but not limited to, air carrier and general aviation operations, air traffic management, training, maintenance, design, manufacturing, rules and regulations, weather, and organizational cultures.

of a precursor, and so it is important for the reader to understand what the authors mean when we use the term throughout this report.

We use the term precursor to mean the symptom of a systemic problem that is conducive to human error and that, if left unresolved, has the potential to result in an accident. A symptom is a measurable deviation from expectations or the norm. It is the problem that must be treated; not the symptom

We need to start with a model to understand the problem. In Section 5, we describe our concept of Scenario as

SCENARIO = {CONTEXT + BEHAVIOR → OUTCOME}.

We consider the Context to be that of the last safe state², and the Behavior results in the transition to the Outcome. When the Outcome is an anomalous (unwanted or compromised) state, the last safe state is identified as a precursor. A set of our experiments (the first of which is described in Section 8) is directed at exploring the correlations between the categorical features of the Context and of the anomalous Outcomes. Our assumption (yet to be proven) is that such correlations, together with inputs from domain experts, will help us identify those specific categorical features that cause the last safe state to be a precursor. That is, the causal factors of the Behavior produce the transition from the last safe state to the unwanted Outcome. Our concept of Scenario constitutes the basis for the experiments discussed in Sections 7 and 8 and the future directions of this research discussed in Section 9.

The tools developed to date under the ASMM Project for extracting information from data – in particular, quantitative data – have been based largely on statistical analyses. However, as discussed by Pearl [Pearl (1997)], statistical correlation is a necessary but not sufficient condition for causality. Correlations among precursors, anomalous states, and incidents can provide, at best, partial and indirect evidence about causal links. For example, when we explore correlation between anomalous outcomes and contextual factors as described in Section 8, we must be careful that we do not lead the reader to believe that these are necessarily causal factors. An example is that incidents associated with Traffic-alert and Collision-Avoidance System (TCAS) alerts will be well correlated with an aircraft being airborne, but we should not conclude that being airborne is a causal factor of TCAS events. A further caution is that we must not come to conclusions based on statistical analyses that may not have included significant operational factors (Simpson’s paradox). For example, a comparison of operations at two airports may be skewed quite differently if we include weather. Or to cite another example, a comparison of operations of two make/model aircraft (say, the Boeing-737 and the Airbus-320) may be changed if we included aspects of the flight crews’ training experience. Statistically significant events must not be interpreted as necessarily being operationally significant. Causes cannot be derived on the basis of statistical or functional relationships alone.

It is important that a precursor not be viewed as being synonymous with causality. Recall that we have identified the last safe state as a precursor if (and only if), among its categorical features, it includes those particular factors that cause the Behavior to produce a transition to an anomalous state. It is in this sense, that we use the term “causal factors” to include:

– Conditions *necessary* for the occurrence of a precursor

² When we speak of the “state” in this report, and, in particular, in Section 5, we mean the state of the entire system.

AND

– Conditions that *increase the probability* of occurrence of that precursor.

Note that the treatment of the causal factors often entails a re-design, a new procedure, and new training.

Consequently, in the approach to the study reported here, we are searching for the causal factors of the precursor incident and not of the anomalous consequences, per se. Even more precisely, as discussed in Section 9, we are seeking to uncover those particular causal factors of the precursor that explain why the transition to the anomalous state occurred.

Identifying the precursors of the next accident is a particular challenge in a complex operating environment like that of aviation with many interacting components. People are key components of the aviation system and human error is frequently cited as a major contributing factor or cause of incidents and accidents. Sixty to eighty percent of fatal aviation accidents are attributed (rightly or wrongly) to human error. [See, for example, Boeing (2002) & (2004)] However, simply saying that one or more of the humans in a system may have made a mistake is not constructive.

The attribution of “human error” is a social- and psychological-based judgment of human performance made in hindsight that is invariably biased by knowledge of the outcome. [Woods et al (1994)] However, human performance is relied upon to resolve uncertainties, conflicts, and competing demands inherent in large, complex systems. Consequently, human performance is as complex as the domain in which it is exercised and cannot be judged independently. Human behavior is context-dependent, and little can be understood of the causes of human error without understanding the prevailing as well as the more distal conditions that, by their confluence, are conducive to error. Much depends on being able to determine how complex systems have failed and how the human(s) contributed to such outcome failures. Consequently, our question is, “Why do professional, well-trained, highly motivated operators of the aviation system make mistakes?” Our focus is on uncovering and understanding those precursor conditions that elevate the probability of downstream human errors and that, in turn, may contribute to aviation safety incidents or accidents. Knowledge about these systemic features helps us to understand how they shape human behavior and how to improve the performance of the system.

The ASMM project has developed automated tools for extracting information from both quantitative numeric data, and from qualitative textual data, and for recognizing information from either data source that may be relevant to a particular query. Information extracted from quantitative data sources helps the domain expert understand the objective aspects of *what* happened, and from qualitative data sources to understand the subjective aspects of *why* an incident occurred. Each ASMM tool contributes insights into the complete picture of an event by extracting relevant information from heterogeneous data sources, and supports the complementary processes of causal analysis and safety-risk assessment. Causal analysis and safety risk assessment, together with analysis of associated costs and benefits, are all required in order for experts to formulate appropriate interventions.

This report describes a conceptual model and an approach to automated analyses of textual data sources that primarily aid the expert in understanding why an incident occurred. Throughout this report, we will make reference to extracting objective as well as subjective information from

textual reports. However, our main focus is on understanding why an incident occurred, for which we must rely on the subjective perspective of the reporter of the incident. We rely on other quantitative data sources (e.g., in-flight-recorded data and air-traffic-radar data) and other ASMM tools [Chidester (2001), Chidester (2003), Ferryman (2001), Statler et al (2003)] to extract the complementary information about what happened.

2 The Context of this Study

This report explores a first-generation process for routinely searching large databases of accident or incident textual reports, and consistently and reliably analyzing them for causal factors of human behavior in aviation operations (the *why* of an incident). Incident reports indicate the presence of problems in systems that, if left unresolved, have the potential to result in an accident. [Heinrich (1959)] The experiential account of the incident reporter is the best available source of information about why an incident happened.

The analysis of textual databases poses several challenges. First, the process is typically labor-intensive and requires high-priced domain expertise. Further, such analyses not only require experts from aviation operations to understand what happened according to the reported incident, but they will often also require experts in human factors to explain why events happened. Unfortunately, current methods for analyzing textual data often focus on what went wrong and what the consequences were, but fail to exploit this primary source of information about why an event happened. Therefore, there is a need for new analytical methods and automated capabilities to help the experts mine these rich and complex textual databases for insight into the necessary, contributing, and aggravating causal factors of an event.

There are two primary sources of aviation experiential, textual reports to which reference will be made throughout this report. One of these is the database of the Aviation Safety Reporting System (ASRS), [Reynard et al (1986), Chappell (1997), and Connell (1999)] which is a collection of nearly 115,000 narratives of aviation safety incidents that have been voluntarily submitted by reporters from across the aviation industry. The ASRS, managed by NASA and funded by the FAA Office of System Safety since 1976, is one of the world's best-known and most highly regarded repositories of safety information. ASRS incident reports have been used extensively for this study, as well as for earlier studies, as a unique “test bed” for evaluating the tools that are being developed under the ASMM Project for processing and analyzing textual data. In addition, this study has benefited from convenient access to knowledgeable ASRS personnel who have developed, operated, and utilized the system to the benefit of the industry.

The Aviation Safety Action Programs (ASAP) are currently generating the other database of textual incident reports on which ASMM tools and methodologies are being tested. The ASAP programs are intramural, voluntary safety reporting programs through which certificated personnel (pilots, dispatchers, mechanics) at participating air carriers report any safety concern they observe, even if it resulted from their own errors. ASAP reporting and processing are modeled on concepts and principles first put into place by the ASRS, and, like the ASRS, are non-punitive and confidential. Under a collaborative agreements with air carriers, some of the tools and methodologies described in this report are being tested on ASAP reports, but this report will address only the experiments that used ASRS incident reports.

This report describes a data model and related experiments aimed at achieving an automated understanding of the causal factors of the human error embodied in reported incidents. Our approach is not designed to fit any specific incident-reporting system – our methodology must be sufficiently generic to be used with any database of textual reports of aviation incidents – but we are going to refer often to the ASRS because it is representative of all such databases.

There are, of course, many tools already available for searching textual databases. We have considered their applicability to our needs and, in Appendix A, we describe several tools that we tested on subsets of ASRS reports prior to undertaking this study. Others are continually being identified and evaluated in this on-going study.

2.1 Research Objectives

The intent of this research is to better understand the quantitative and qualitative attributes of an aviation incident, and to identify the respective contributions of their interaction to incident occurrence. Our specific research questions are as follows:

- (1) What is the fundamental structure underlying an aviation incident? What are the contextual parameters associated with each part of this structure? Which of these parameters can be considered objective (based on observable data), and which subjective (existing largely within the reporter’s mind)? Can the parameters used to define the structure of an incident be adapted to an automated analysis process?
- (2) What are the pragmatic constraints we must consider in undertaking experiments in automated analysis of textual reports that are based on statistical processes, and that can be used on very large databases? Can the similarities highlighted by an automated analysis process be checked for validity and usefulness? How can we use domain knowledge to minimize the domain size that the automated tools must consider?
- (3) Is there a conceptual paradigm that will allow us to explain the sequential, discriminating factors that constitute the *why* and *how* of incidents in large aviation databases like the ASRS database? Can this description be used to “tune” automated analyses that will identify contextual similarities between groups of incidents?

2.2 Outline of This Research Report

Incident reports are written by operational personnel who try to describe as clearly as they can a situation they encountered having safety implications. The report forms used by the ASRS and the ASAP contain both fixed fields and free narratives. Together they present the story of what happened, how it happened, and, very often, some attempt to explain why.

Automated tools for aiding analyses of textual databases must enable efficient retrospective search for any prescribed event, and must also enable discovery of the un-envisioned. One of the biggest challenges of proactive management of risks is to develop the capability to explore data without knowing what we are looking for. The automated tool should be able to extract typical incidents, but it should also be able to highlight atypical ones and describe their differences in a way that is similar to the tools we have developed for analyzing flight-recorded quantitative data. [Ferryman (2001)] Fundamentally, both of these requirements rely on a capability to extract

groups of similar incident reports from a very large database. A challenge is to find the most effective basis for judging similarity.

In the development of tools for analyzing flight-recorded data, we found that a concept we called the “flight signature” was useful in guiding the automated identifications of similarities among flights. We believed that we needed a similar model to capture the underlying structure of an incident report and to guide the automated analyses of textual data. Over the years, we (i.e., the authors of this report) had occasion to read many of the ASRS reports in connection with other studies. Our experience with ASRS reports led us to developing a model based on a sequence of states and transitions. In Section 3, we will describe the resulting incident model to aid in understanding the structure of incidents.

As stated previously, the incident-report forms have fixed fields that the reporter is expected to complete as well as the narrative in a free-text field. The fixed fields (the attributes), together with the information the reporter and the ASRS analyst enters into those fields (the values of the attributes), comprise the codification of an incident report. A coordinated exploitation of the information extracted from both the fixed fields and the free-text fields is necessary to achieve our objectives, and this is discussed in Sections 4 and 5.

Section 5 introduces the concept of a scenario, a simplified subset of the incident model, as a pragmatic approach for guiding automated clustering of similar incidents.

Section 6 presents a summary of the results of the studies described in the previous sections to lay the groundwork for the discussions and experiments in the following sections.

Section 7 describes a limited experiment based on 40 incident reports. The aim was to evaluate what could be expected from a clustering process based only on the taxonomy (i.e., attributes and values) of the fixed fields and the concept of scenario.

Section 8 describes a preliminary experiment to evaluate the capability to identify and cluster reliably on similarities of what happened.

Section 9 describes the approach to extract information about why the event occurred, after automatically identifying what occurred, using the scenario model. Our approach is based on the proposal that loss of Situation Awareness is the behavioral failure primarily responsible for errors in our aviation world.

Section 10 presents a summary of the conclusions of this study and projections of the continuing studies. This report (Volume I) is the first of two on this research. It describes the approach and lays the foundations for the follow-on experiments that will be reported in Volume II now in preparation.

3 The Incident Model

The management and the exploitation of very large databases of incident reports highlight the need for sophisticated tools to process free text and to automatically classify reports in a way that is meaningful to experts. In order to extract useful information (whether quantitative or textual) from large databases, it is necessary to identify global patterns and relationships to aid decision-making. We need a model with which to guide the automated analyses.

Report narratives embody naturally occurring chains of events and the transitions between events. An incident report is similar to a script of a play: it describes the environment of the action, the protagonists, and the steps (or acts) in the course of story. In fact, we will introduce the concept of a “scenario” of a report to represent these naturally occurring “stories.” The aim of the next section is to define more precisely the elements of this model, in order to highlight concepts that could be used to calibrate automated tools that will extract information about why the incident occurred. We will first define the meanings of the words used in our model.

3.1 Definitions

World: “*An area, sphere or realm (a field of interest or study) considered as a complete environment*” (Collins Dictionary).

The world of an ASRS-like incident report is composed of all the aircraft, people, weather elements, ground equipment, and other factors that have to be taken into account to describe and understand the course of events that happen (the story). The world of the aviation incident report is a subset of the real world. The boundary of this world (i.e., defining what is needed for a complete environment) is always subjective and depends on the granularity of the description and the scope of the understanding that we want to reach. Following are two examples of what we mean by a bounded world of an incident report:

1. A report describes an incident that took place in San Francisco in severe weather conditions. The cause of such weather conditions is the El Niño phenomenon. Nevertheless, El Niño will not be part of the world of this incident, as the aim is not to understand the weather conditions, but the incident that occurred.
2. A report is about an incident in which an air-traffic controller took an inappropriate decision that resulted in a loss of desired separation between two aircraft. Which aircraft have to be taken into account in the world of this incident? Only the ones in conflict? All the aircraft under the control of the controller (because they change the task of the controller)? We will consider only the aircraft in conflict, as all of the aircraft under the controller’s direction are outside the bounds of our “story.”

The world is changing continuously; therefore, its description has to be dynamic.

Parameters: The world and its evolution are observed and described through parameters. Some parameters are linked to physical measures; others are not. Parameters can be objective (i.e., defined on bases of measurable data) as, for instance, flight altitude or speed, or subjective (i.e., the value of the parameter is not a result of measurable data) as, for instance, the ASRS report-form entry “passenger misconduct” to describe a world in which a passenger exhibits abnormal behavior.

The choice of parameters adopted to describe the world is crucial, as this choice largely determines which sort of automatic treatment will be possible. Two criteria have to be considered in selection of parameters: the level of abstraction of the concept embodied by the parameter, and the ability of this parameter to represent “small” variations.

For instance, let us consider a very simple world that consists only of an electric light bulb. We can choose to describe this world using the terminal voltage of this bulb or with a Boolean parameter (i.e., on/off) as in Figure 1. The levels of abstraction of these two factors are not the

same and their abilities to describe the evolution of the world for short periods of time are not the same. If we want to have only a “high level” understanding of the evolution of the world (as a pilot might), the Boolean parameter is the better choice. If we want to understand the response of the component to specific electrical signals, the voltage level is a more suitable parameter.

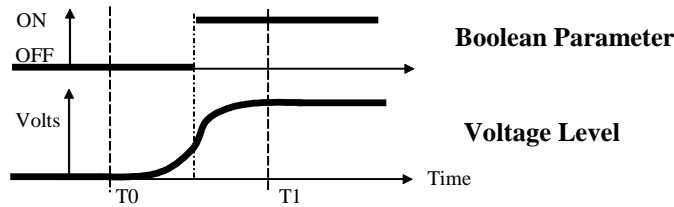


Figure 1- Example of Parameter

State (of the world): The state of the world is the description of the world at a fixed time (a snapshot). The state of the world is given by the values at that time of all the parameters that have been chosen to describe that world. For instance, the state of the “bulb” world at time T0 is “Off” if we describe this world with the Boolean parameter.

Event: *“Anything that takes place, especially something important”* (Collins dictionary)

When we observe the evolution of the world over a period of time, the evolution of some of its parameters can be described by an abstract concept called an event. An event is defined by a progressive evolution of a set of parameters that “makes sense.” For instance, the evolution of the Boolean parameter between T0 and T1 is typical, and allows us to define the event: “switch on.”

As an event describes the evolution of some subset of all of the parameters that describe the world, it gives information about the state of the world before the event, during the event, and after the event.

The level of abstraction of the events defined can be a simple evolution of a few parameters (for instance, our event “switch on”), or a very complex combination of many parameters (for instance, an aircraft “takeoff”). Some events, such as “takeoff,” can be decomposed into more elementary events (such as “accelerate”, “rotate,” “liftoff”...) called sub-events.

Transition: *“Change or passage from one state or stage to another”* (Collins dictionary)

A transition is a combination of events that allows the world to change from one state to another.

Incident: Aeronautical operations are planned according to some rules. These rules try to keep the world in “safe” states and provide criteria to define “unsafe” states (for instance, two commercial aircraft in flight separated by only 100 feet define an “unsafe” state of the world). When the evolution of the world brings it to some “unsafe” state, we have an incident.

An incident is an evolution of the world such that the state of the world reaches some “unsafe” state, and then returns to a safe state.

3.2 The State/Transition Representation of the Incident Model

Reporters of aeronautical incidents describe problems encountered during flight operations. They usually tell them as stories with emphasis on what happened, on the involvement and behavior of

people, and on the important features that help us to understand why these problems occurred. Hence, we assume that the course of an incident is well described by a sequence of states and transitions, and that the whole incident can be decomposed into a sequence of transitions causing the world to evolve from one state to another. Our first assumption is that the essence of the evolution of our world can be captured adequately from the report of the incident, and that this model can be used to tune clustering tools.

Therefore, all the information contained in the report can be associated with a description of a state of the world, or with the characterization of an event that contributes to a transition.

Example: (ACN 81075) “WE WERE ON A VISUAL APCH BEHIND A WDB FOR RWY 28R. AT ABOUT 1000' AGL THE TWR OFFERED US 28L. WE CHANGED TO 28L AND THE TWR CLRD THE WDB TO CROSS 28L AHEAD OF US. THE WDB DELAYED XING AND WHEN WE WERE CLOSE IN THE TWR OFFERED US 28R. WE ATTEMPTED TO CHANGE TO 28R BUT WERE TOO CLOSE IN TO MANEUVER AND SO WE WENT AROUND.”³

In this example, the first sentence describes a state of the world, while the phrase, “We changed to 28L,” describes an event that belongs to the first transition. The evolution of the world as described in this narrative can be represented by a sequence of 4 states has shown in Figure 2:

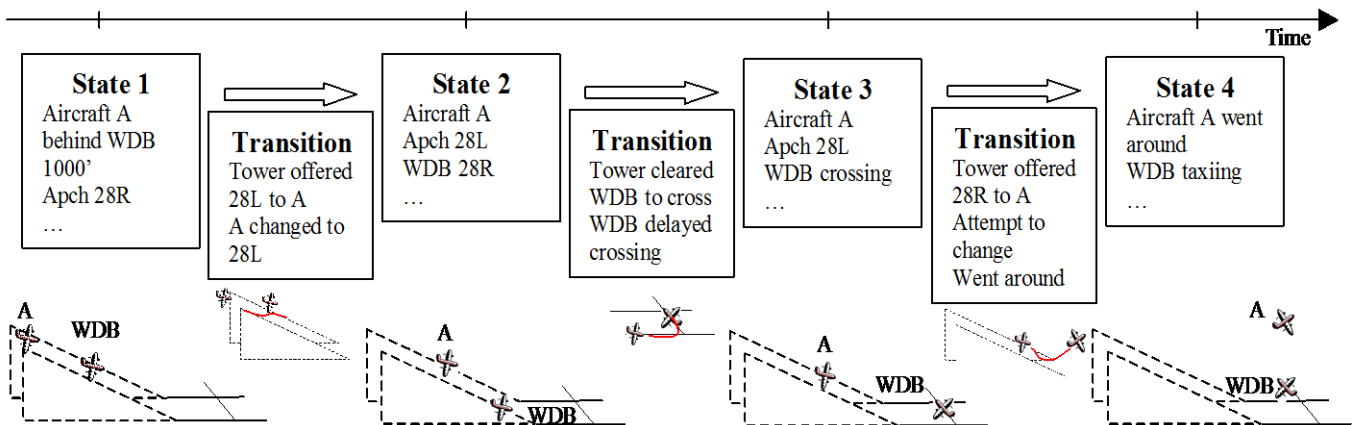


Figure 2 – A State/Transition Decomposition of an Incident Report

Nearly all stories (whether in the aviation world or not) can be decomposed into a State/Transition sequence. However, aviation incident reports have other characteristics that we need to exploit. The notion of an aviation incident implies an issue of safety: operational personnel consider that an incident occurs if, for a period of time, the situation is considered as “unsafe” or anomalous. Such notions are not clearly defined and not always interpreted in the

³ For the reader who may not be familiar with aviation abbreviations, following is a literal translation: “We were on a visual approach behind a wide-body for runway 28 Right. At about 1000 feet above ground level, the tower offered us 28 Left. We changed to 28 Left and the tower cleared the wide-body to cross 28 Left ahead of us. The wide-body delayed crossing and when we were close in the tower offered us 28 Right. We attempted to change to 28 Right but were too close in to maneuver and so we went around.”

same way by all operational personnel. Nevertheless, we can assume that, at a given point in time, aircraft are expected to exhibit a set of Required Properties that define the aircraft (viewed as a total system) as being in a nominally safe state. The Required Properties relate to the aircraft's

- Position (altitude, latitude, longitude, airspace occupancy)
- Trajectory (heading and projected course)
- Flight Dynamics (attitude, rotation rates, and speed)
- Airframe Integrity
- Propulsion Status
- Compliance with Clearances, Regulations, and SOPs.

This definition implies that there is an expected reference value for each of these properties at every point in time. On the basis of these Required Properties, we can define the following three states of our aviation world:

SAFE: All the aircraft and people (crews, traffic controllers...) and all the key systems (aircraft systems, ILS...) are in a state that approximates normalcy.

COMPROMISED: A person involved in the situation or an aircraft system is in an undesirable state, or undesirable environmental factors impinge upon the aircraft, but for all the involved aircraft their Required Properties are still nominal and the separation between aircraft complies with norms.

ANOMALOUS: One or more of the Required Properties of an aircraft or an involved person is observably not in compliance with pertinent norms.

Further, we will characterize what is referred to in this report as an aviation incident as follows:

INCIDENT: An incident is a finite sequence of states and transitions such that:

- The first state is safe,
- The last state is safe,
- All the other states are either compromised or anomalous and,
- At least one state is anomalous.

If the state does not return to a safe one, the story is not related to an incident, but to an accident. If no anomalous state is reached, the story is not considered to be an incident. (Figure 3 shows this description of our incident model.) As shown in Figure 3, the last unsafe state is often an anomalous one, but this constraint is not required by our definition.

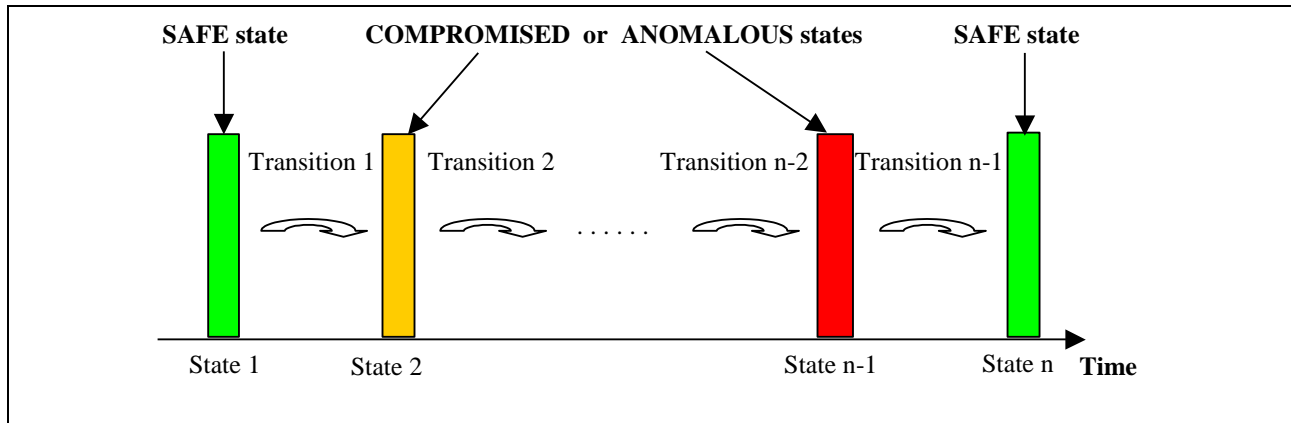


Figure 3 – The Incident Model

The aim of our incident model is to identify the key components that can be used to tune automated data-mining tools. We are proposing that this representation (i.e., the Incident Model), with its complete descriptions of all of the states and transitions during the evolution of an incident, is a generic model of any and all experiential reports of incidents that occur in our world of aviation. The descriptions of the states and transitions are based on parameters. Therefore, we will need to study the set of possible parameters, and we will discuss this in the next section.

4 Parameters for the Descriptions of States and Transitions

We said in Section 3.1 that the world and its evolution are observed and described through parameters. In the example presented in Figure 2, states and events have been described in an informal way by sentences or words extracted from the narrative. Choosing a set of parameters that describe a state of the world and a set of parameters that describe a transition will give us a more formal description of each part of such an incident.

A wide variety of taxonomic structures⁴ is used in the different accident / incident databases⁵. Our first objective was to identify the taxonomy, together with all of its possible terms and their structure, which is most suitable for reports of incidents in our world of aviation. Each term must map to a parameter in the description of our world in the incident model. The set of parameters that we selected for our study is based on the taxonomic structures underlying three different codification forms designed specifically for use with the ASRS database.

- The ASRS codification: The codification of an ASRS incident report is comprised of the set of attributes (the fixed fields) and the values of those attributes (entered by the reporter). This structured set of ‘descriptors’ is currently used to describe the incident and store it in the database. The codification form is designed for use by operational personnel. One part of the ASRS report form focuses on the involvement and behavior of the protagonists in the “story” reported. In fact, the ASRS report form (NASA ARC

⁴ By taxonomic structure, we mean a structured set of terms that describe some domain or topic. The taxonomic structure provides a skeletal structure for a knowledge base.

⁵ As examples, O’Leary et al (2002) gives examples of the type of parameters used in the British Airways Safety Information System (BASIS) while Murayama et al (2002) shows some of the Performance Shaping Factors used in a marine incident reporting system.

227B – January 1994) encourages reporters to describe the “Chain of Events” (i.e., how the problem arose – Contributing factors – How it was discovered – Corrective actions) as well as “Human Performance Considerations” (i.e., Perception, judgment, decisions – Actions or inactions – Factors affecting the quality of human performance). Nearly 115,000 incident reports have been codified with this taxonomic structure and are available for further evaluation in the ASRS database. (See Appendix C-1.1 for a description of the ASRS codification.)

- The X-Form is another template that was designed to update the codification of ASRS reports. It was designed by ASRS personnel after several years of experience entering the reports into the database and conducting retrospective searches. It contains more fields (attributes) than the ASRS codification, which were intended to improve the descriptions of human-factors issues, but it has never been implemented for routine operational use by the ASRS. (See Appendix C-1.2 for a description of the X-Form.)
- The Cinq-Demi methodology was developed during the 1980s as a tool for analyzing aeronautical-incident reports from a human-factor’s point of view. (A brief description of this methodology is provided in Appendix B.) This methodology involves a structured analysis that focuses on identifying conditions having a high probability of leading to human errors. A codification form for ASRS reports was designed from the perspective of providing additional fields to improve the applicability of their subsequent analyses using this methodology. Small sub-sets of ASRS reports have been codified using this form developed by Cinq-Demi, and are available for further evaluation. (See Appendix C-1.3 for a description of the codification based on the Cinq-Demi methodology.)

Appendix C contains a description of the study that was made of each of these three codification schemes. The comparison of their structures and a mapping of all of the parameters used in these three forms to a common taxonomic structure (described in Appendix C) were the bases of the following discussion and of the definition of the full set of combined parameters that is provided in Appendix D.

4.1 High Level Structure of the Three Codifications

As explained in Appendix C, the structures of the three codification forms for ASRS reports differ in specificities, but their global organizations are quite similar. We describe in Appendix C how the information contained in all three can be classified into a high-level structure composed of the following five categories:

1. **“Time and Setting”**: We group in this category all the information related to the framework of the story (when, where...) and to the fixed entities (facilities...).
2. **“Cast of entities”**: This category contains information on the persons and all the entities that evolve and take actions in order to create the story.
3. **“Anomaly”**: This category pertains to all the information that explains why the “anomalous state” is anomalous.
4. **“Transitions”**: This category is all the information that characterizes a transition in the incident model of states and transitions.

5. **“Other”**: This category includes any information that cannot be classified into any of the other four categories.

These categories are used only for the codification of a report and are not intended for use in an in-depth analysis of the incident. They include neither a precise description of the sequence of transitions, nor an accurate time reference. The value of a well-designed codification is, primarily, in its ability to effect an efficient retrospective search of the database so as to produce a minimum of false positives. However, worthwhile analyses can be only be conducted on the basis of the information (the values of the attributes) contained in the fixed fields of the form. Figure 4 consolidates the information contained in the three codification forms and shows the overall structure of knowledge of an incident report.

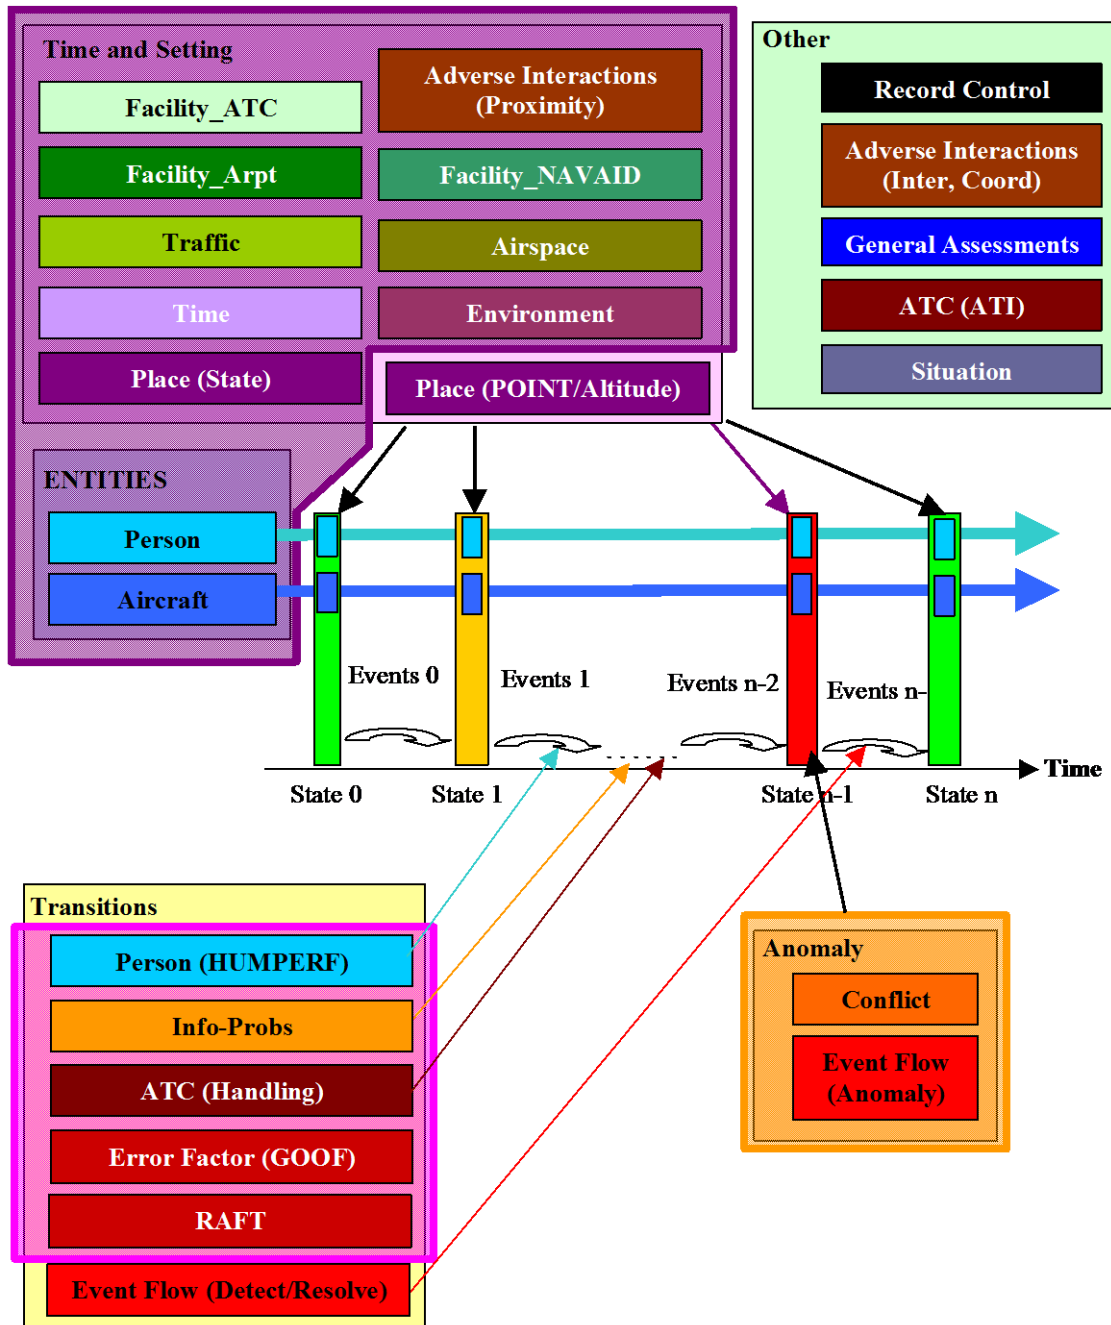


Figure 4 – Consolidated Structure of ASRS Codifications

4.2 A “Full and Complete” Set of Parameters

As highlighted in Wiegmann and Thaden (2003), most reports are highly informative about *what* happened, but give much less definitive information about *why* an incident happened.

Consequently, there is merit to designing the analysis process so that the first level of automated filtering clusters incident reports on the basis of similarities in what happened. Furthermore, most of the information about what happened is contained in the parameters (attributes and values) of the fixed fields of the consolidated structure of ASRS codification (see the previous section and Appendix C). Consequently, our first objective was to come to agreement on the “full and complete” set of parameters that describe the world of the aviation incident reports. Appendix D discusses the mapping of the parameters of the three codification forms; we assume that merging these parameters results in a nearly “full and complete” set of parameters that describe the world of this study. Also, for every parameter used, we can state if the concept captured is objective or not. We use the following definition: a concept is *objective* if its definition can be based on *observable, measurable* data. All the concepts that are not objective are called *subjective*.⁶

Our hypothesis is that a full and complete set of objective parameters of an incident in our aviation world adequately describes what happened. We further believe that, given a full and complete set of the objective parameters, automated tools could reliably analyze and cluster incident reports on the basis of what happened and could, thereby, provide an adequate description of what happened. (The experiments to demonstrate this are discussed later in this report in Sections 7 and 8.) In fact, clustering on the *what* may prove to be pragmatically sufficient for an effective retrospective search for similar incidents, even though the explanation of *why* may be quite different within a cluster of similar incidents. The understanding of *why* the incident happened will rely on subjective parameters and exploitation of the free text. The proposed process to achieve this in a second stage of automated filtering is discussed later in Section 9 of this report. However, first we need to introduce the notion of a scenario and explain how it is used to determine similarity of reports, based on what happened.

5 The Scenario

We use the term “scenario” in the same sense as it is often used in literature or cinematography. We will show how it can be used to define a clustering methodology.

Scenario: “*A summary of the plot and characters of a play or film.*” (Collins Dictionary).

Let us begin with an example from literature: “Romeo and Juliet.” The scenario of this play could be: “*Two young people love each other, but sociological difficulties (hate between the respective families) thwart their love. They are desperate when they realize the conflict between their families is insoluble, and their despair brings them to their deaths.*” A scenario provides a global understanding of a story and often emphasizes the starting and ending points of the story. Several scenarios, more or less detailed, can be given for the same story and some different stories (e.g., not in the same place, not with the same people...) can have the same scenario.

An aviation incident report can be seen as a story and, as with a play or a movie, we can try to extract from it a scenario. An aviation incident report is the story of the evolution of our world from a safe state, through a sequence of events and states to a compromised or an anomalous state. If we return to our example (ACN 81075) in Section 3.2, its scenario could be: “A

⁶ Some of the objective factors may come from the fixed fields of a new codification form while others may have to be extracted from the narrative, but that is not important to this discussion.

transport category aircraft is on a visual approach to an airport with active parallel runways. ATC changes the aircraft's landing clearance at low altitude and a conflict develops with a taxiing aircraft. The aircraft makes a go-around maneuver."

The scenario notion can be useful to guiding the automated analysis and extraction of clusters of similar incidents from large databases. Indeed, when the search is not based on a pre-defined specific issue or a pre-selected example report, a meaningful way to build clusters is to group reports with similar scenarios. Identifying the main scenarios in a database (i.e., its profile) should help experts identify major safety issues and obtain clues for designing intervention strategies.

Therefore, we need to have a more accurate definition of the scenario notion. As with a play, the scenario highlights some parts of the story. So the specificities of the story have to be used to define the scenario concept. As shown by the state/transition model of an incident, an incident report has a specific structure that has to relate to the design of the scenario. Let us recall some of the characteristics of an incident:

- It starts with a safe state,
- The first transition leads the world into a compromised (or anomalous) state,
- One of the transitions leads the world in an anomalous state,
- One subsequent transition recovers a safe state.

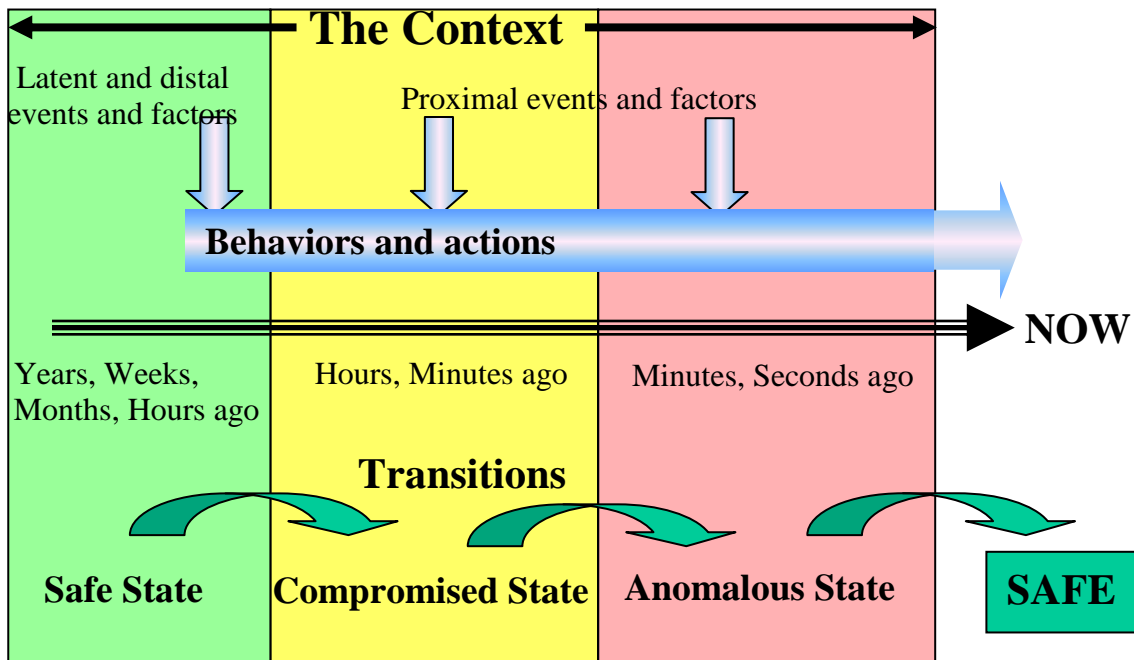


Figure 5 – The Framework of the Scenario Concept

Figure 5 is another representation of an aviation incident that is obviously similar to Figure 4. However, we use this representation to make several important points. The initial safe state may extend over a long period of time and may entail latent and distal events and factors, such as organizational culture, laws and regulations, company policies, and education and training that

may influence the behavior of the protagonists. In the time frame of minutes to hours, there may be proximal events or factors such as weather, visibility, traffic, fatigue, and equipment that may influence the protagonists' behavior and the transitions from the safe to a compromised state. In the time frame of seconds to minutes, the safety of the system may rely upon immediate factors of communications between the pilot and the air-traffic controller. The point is that human behavior is context-dependent. As we seek to understand the causal factors of human error and the *why* of the incident, that context extends across all three states (safe, compromised, and anomalous). Further, the factors of the context may evolve during the course of the incident and may even be influenced by the actions taken. [Woods et al (1994)]

Figures 4 and 5 may well be the representations needed to achieve our objectives. However, they are much too complex to be used as a basis for identifying similarities with automated clustering tools, at least for this initial study. Therefore, based on our experience with ASRS reports, we chose to emphasize three parts of the generic incident model represented in Figure 4 for our concept of scenario: the first (safe) state (the beginning of the story); the sequence of states and transitions that lead the world to the anomalous state; and the anomalous state. Thus, the high level definition of the scenario that has been adopted for this study is:

SCENARIO = {CONTEXT + BEHAVIOR → OUTCOME}

With this simplified definition of scenario:

- The Context fits the exact description of the situation in the last safe state.
- The Behavior contains all the problematic events that occur during the transition from the last safe state to the anomalous state.
- The Outcome describes why the anomalous state is considered as anomalous. It does not necessarily contain all the parameters used to describe the state.

This simplified model may not apply to all worlds and, even for our aviation world, other representations could be stated and will, perhaps, have to be explored in future work. As an example, we could highlight the recovery action and the final safe state in order to study which parameters influenced the recovery process (and so prevented an accident). Also, this model does not provide for the possible changes in context across the three states, as the context of the last safe state is assumed to prevail throughout the incident. Nevertheless, there is merit in starting with the simplest possible model.

The objectives of the first stage of automated analysis are: (1) to identify and describe the scenario of an incident report, and (2) to identify similar scenarios from a large database of incident reports. Both of these objectives benefit from our simplified definition of scenario.

Figure 6 shows the associations between our definition of scenario and the incident model. Figure 7 shows its relationship to the high-level structure and informational categories discussed in Section 4.

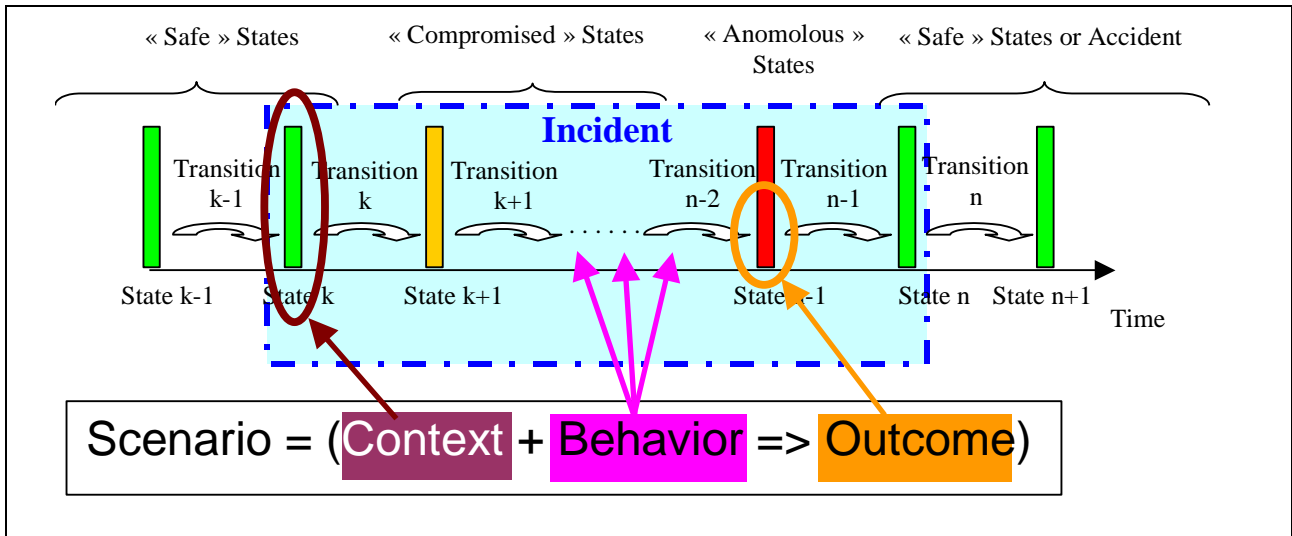


Figure 6 – The Relation of Scenario to the Incident Model

We need to focus and guide the automated analyses of textual reports in order to maximize the chances of success with current capabilities. One way is to use aviation-domain knowledge to minimize the extent of the world that the automated tools must consider for each incident report, by aggregating the reports in the database. Accordingly, we use “phases of flight” as an aggregating principle because aviation-incident scenarios are likely to be identifiable with phases of flight. We may choose to further constrain the domain by aggregating reports by size or type of aircraft, for example, or by visual versus instrument flight rules, but such aggregations may well be determined by the purpose of the search. Next, we again use aviation-domain knowledge to identify the possible anomalous or compromised states for each phase of flight. (For example, a near-midair collision is not an anomalous state for the taxi-out phase of flight.) Then we identify the subset of the “full and complete” set of parameters (objective and subjective) that could be relevant to, and that could define the states of, any incident entailing any of those anomalous outcomes that could occur in each of these phases of flight.

The specificity of the parameters used to define the scenario’s three parts will determine the degree of discrimination that the automated analysis process can achieve: the parameters used to define the Context, Behavior and Outcome will have to be more detailed and precise if we are interested in distinguishing small differences among incidents then if we are only looking for general categories. Consequently, the scenario is defined by the subsets of parameters that describe the Context, the Behavior, and the Outcome of the incident model that are specific to the “story” of a particular incident report. Thus, not all the parameters used to define a state of the world will be used to define the Context, because not all the parameters of the Context of the initial safe state are important to, or are causal factors of, the Behavior or the Outcome of that “story”. In the same sense, the Outcome is described only by those parameters that distinguish this state as an anomalous one.

Therefore, now we have the beginning of a taxonomic structure for the first stage of clustering on what happened. We start with a prescribed subset of incident reports (aggregated, for example, by the phase of flight and aircraft type or, possibly, location), then, with the aid of aviation-

domain experts, identify within this subset all of the possible anomalous states (for that phase of flight or aircraft type), together with the objective descriptors that could possibly be associated with that subset of Outcomes. So, within each aggregation by, for example, phase of flight and aircraft type, we focus on the subset of reports related to each of the anomalous outcomes possible in that subset that have been identified by the domain experts. Finally, we identify, again with the aid of domain experts, all of the other objective and subjective factors that could be relevant to any incident in that sub-subset. This process uses aviation-domain knowledge to maximize the information known, *a priori*, about the incident so as to minimize the domain that the automated system must consider in this first stage of filtering. Then, in the first stage of automated filtering, we will cluster on similarities among the objective parameters that define the Context of the Scenario together with the similarities of the objective parameters that define each possible anomalous state associated with the Outcome of the Scenario in the aggregated subset of reports. (The experiment described in Section 8 was designed to explore the potential of this first filtering stage on the correlation between the parameters of the Context and each anomalous state.) It is desirable to complete this process before we attempt the next stage of automated analysis of the free text for its implicit (subjective) information about the clusters identified in the first stage.

An assumption previously stated is that we have adequately defined *what* happened (and, possibly, a bit of the "*how*") by identifying all of the objective parameters of the Context and the Outcome that existed in a particular scenario. That was the primary motivation for generating the complete list of the objective parameters. However, all of this, so far, is preliminary to our objective of automatically defining the *why*. In the second stage of filtering, we will see if we can isolate the subset of objective parameters of the Context that correlate to Behavior in that Scenario and, hence, to the causal factors of the Outcome. A proposed approach to achieving this is described in Section 9.

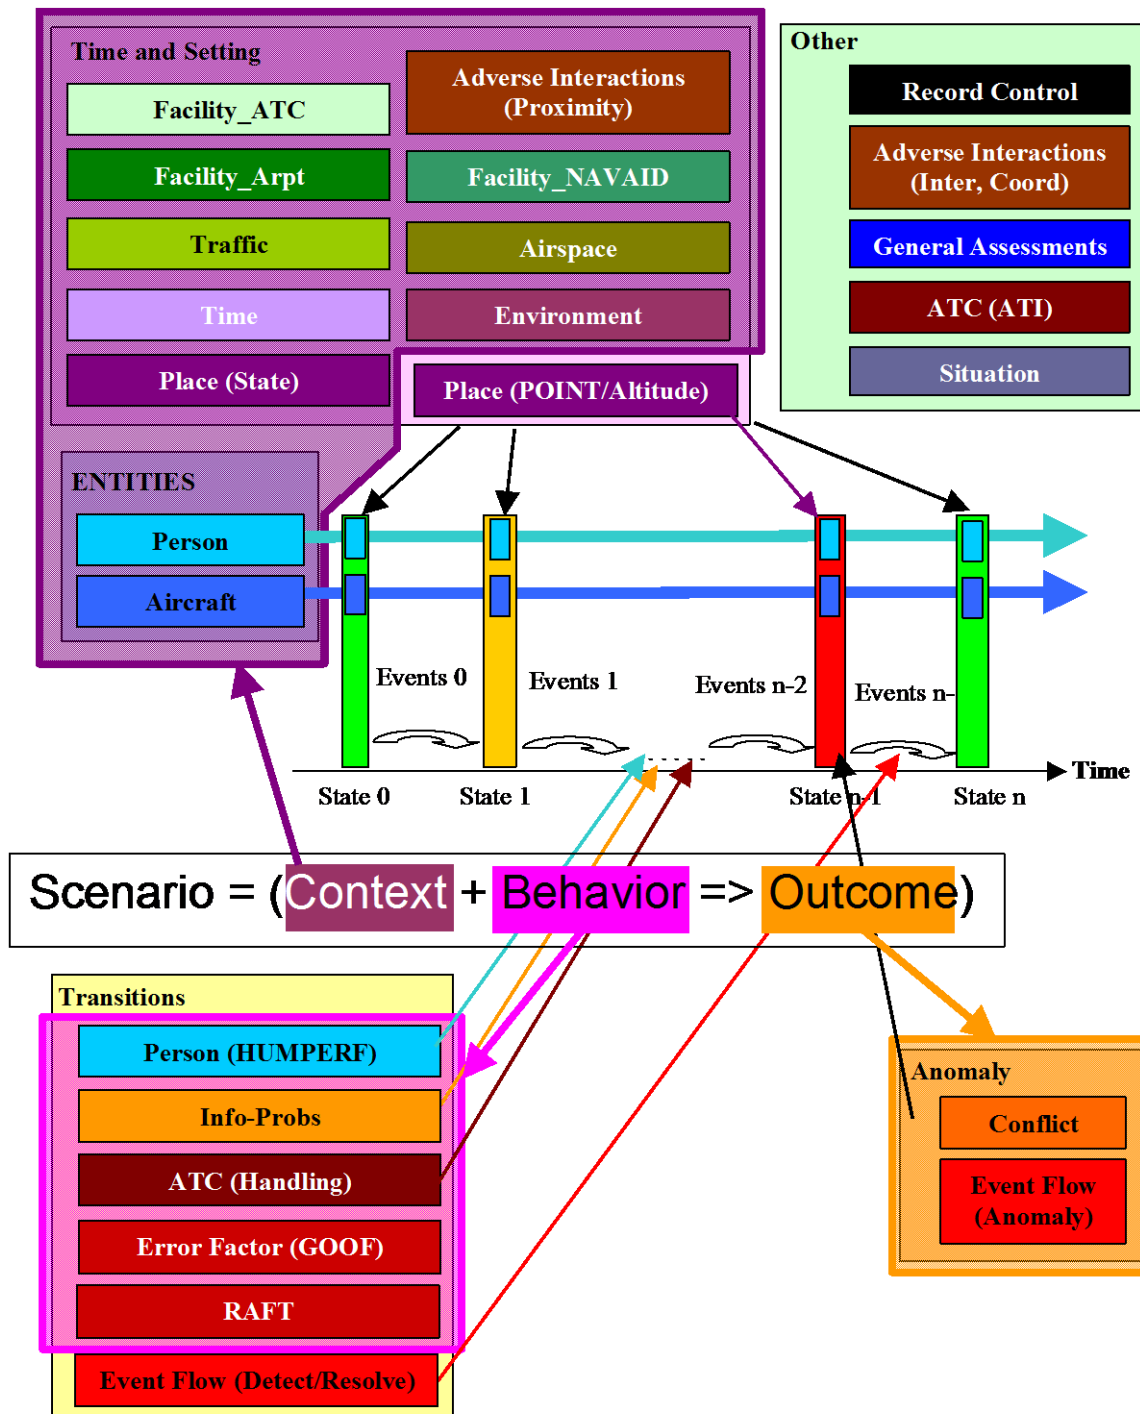


Figure 7 – Relations between the Scenario and the Categories of Descriptors

6 Interim Conclusions

We have shown how we defined a generic structure of information (a taxonomic model) that is adaptable to the description of ASRS-like aviation incident reports. The resulting model of an

aviation incident is postulated to be a sound basis for defining similarities among incident reports. The notion of Scenario has been introduced as a pragmatic guide for identifying similarities based on the objective parameters that define the Context and the Outcome of a Scenario.

We believe that it is possible to design an automated analysis process guided by the structure of the Scenario, and that the results will be easy to understand by an aviation expert. We now have the simplified structure of the Scenario. We have identified the “full and complete” set of parameters that define the Context of the initial safe state, and the anomalous Outcome that adequately describes what happened. Automated tools will use the values of these parameters to identify the Scenario and to cluster similar Scenarios of what happened from the ASRS database. The potential of this approach is demonstrated in the experiments that are described in the Sections 7 and 8.

7 A Case Study

All of the work reported in Sections 3 through 6 was preparatory to implementing an approach to automated clustering that is based on statistical analysis and that can be used on very large databases of textual reports. In this section, we describe an experiment with a different clustering technique that can be used only on small sets of reports, but that enables us to evaluate the model we have proposed. The clustering tool is described in Section 7.1. It entails a methodology based on Formal Concept Analysis [Ganter and Wille (1999)] in which it is possible to maintain throughout the clustering process an explicit description of the similarities among the parameters of the reports. This capability will be used to check whether the similarities highlighted by the clustering process are valid and useful. However, there are pragmatic computational limitations to such qualitative analyses, so that only small sets of data can be considered. The statistically based tools will be used to study larger sets of reports, but they may hide the meanings of the similarities in a given cluster. As we want first to evaluate the validity of the model, we chose to start with a limited experiment based on an explicit handling of similarities.

As explained previously, we assume that a “full and complete” set of objective parameters adequately describe what happened. In this study, we are going to extract from the set of objective parameters identified previously and in Appendix D, a description of the *what* of the incident in two parts; namely, the “Context” and the “Outcome” of the Scenario as defined in Section 5. Then a set of 40 ASRS reports will be codified in a formal language adapted to the clustering tool chosen (in Section 7.2). We use a two-step clustering process. First, we identify the Outcomes (in Section 7.3.1), and then we analyze the Contexts that are typically associated with each of the Outcomes (in Section 7.3.2). In Section 7.4, we describe a limited study on the *why* that relied upon the Cinq-Demi codification.

Before we present our study of these 40 reports and the results, we will describe how these particular reports were selected from the ASRS database, as well as the clustering tool that we used in the study.

7.1 The Sample and the Clustering Tool

Describing objects by their set of properties is a natural process used in several domains. A “concept” of the domain can be described by a set of objects: the extent, which is a collection of examples of elements that belong to the concept; and the intent, which is the set of their shared

properties. For instance, the concept of airplane could be captured by a set of objects such as {B737, B747, B777, A320...} and the set of their common properties {wings, tail, engines, pilot...}. Given a set of objects and the set of properties associated with each object, one can automatically extract all the concepts involved. This is the aim of Formal Concept Analysis (FCA) [Ganter and Wille (1999)] based on well defined mathematical foundations. An extension of the FCA formalism called Generalized Formal concept Analysis (GFA) that enables objects to be described by a structured set of properties has been proposed by Chaudron and Maille [Chaudron & Maille (2000), Maille et al (2005)], and a tool named Kontex has been developed to identify concepts. Given a set of objects and their properties, the Kontex tool calculates all the possible concepts, shows all the relations between the concepts (generalization, specialization) and describes their similarities and differences by using an adapted graphical interface. That tool is well suited to our experiment as each incident report is directly characterized by a structured set of properties (as described by the taxonomy) and so can be considered as an object of the GFA methodology. The GFA methodology was chosen to conduct the analysis of a sub-set of ASRS reports.

An important step in this experiment was selection of the set of reports to analyze. As the purpose was to use the explicit description of the similarities and differences between clusters developed with the Kontex tool, the number of reports had to be limited both as a matter of practicality in reference to calculation complexity, and for ease in interpreting the results. Based on a previous study [Maille (2002)] a set of 40 ASRS reports seemed to be a practical number. Moreover, as we wanted to evaluate whether the taxonomy and the Scenario components supported a meaningful clustering on what happened, we wanted to have in the set of reports a small number of different Contexts and Outcomes in order to have significant clusters. Indeed, if only 40 reports had been taken randomly from the database, they would certainly deal with a large variety of different kinds of *what* and it would have been difficult to utilize the capabilities of the GFA methodology. Therefore, we decided to focus on reports from a particular study of ASRS reports that was concerned with “In-close Approach Changes (ICAC)” [Lecomte et al (2002)]. All of these reports deal with aircraft in the approach flight phase, and so the number of possible anomalies (or Outcomes) is limited. The clustering process would try to reveal finer similarities between groups of reports and possible links between Outcomes (or anomalies) and Contexts. In the ICAC experiment, around 200 ASRS reports had been codified by the Cinq-Demi team and 100 reports had been fully analyzed using the Cinq-Demi methodology of Appendix B. We chose for this experiment the first 40 reports in the Cinq-Demi database that had received a full analysis.

7.2 Formal Codification of the 40 Reports

For the 40 reports, we had both the ASRS and the Cinq-Demi codifications available, but not a codification with the complete set of parameters described in Appendix D. We decided to rely on the ASRS codification as much as possible (for flight phase, anomaly...), even if the codification was not exactly the one defined in our taxonomy. Then we added to this codification some parameters to describe the traffic, the airport (configuration of the active runways...) because these important parameters are not addressed in the ASRS codification. For these new parameters, we used the taxonomic structure of Appendix D. All these properties that describe

the Context and the Outcome of the report are formally captured in a first-order language that is used by the GFA tool.

As the Cinq-Demi codification was also available, we decided to incorporate the “error-factor” (part of the GOOF grid) in our formal codification. That parameter does not belong to the *what*, but is part of the description of the *why*. It was not the primary subject of this experiment, but will be exploited in section 7.4.

7.3 Clustering on the What

The *what* is described through various objective parameters that belong to the “Context” and the “Outcome” parts of the Scenario model. Our clustering process starts with the identification of the Outcomes involved in the selected set of 40 ICAC reports. As expected, there are only a few different ones as they were all associated with In-Close Approach Changes. Then for each group of reports associated with a particular Outcome, an analysis of the related Context is conducted.

7.3.1 First step: Clustering on the Outcome

As stated before, we used the ASRS taxonomy of anomalies as the codification of the Outcome. That taxonomy contains around 60 terms grouped into 13 categories (Aircraft Equipment Problem, Airspace Violation, Altitude deviation...). Each of the 40 ASRS reports was identified with one or more of these Outcomes. Using the Kontex tool, the 40 reports were clustered according to their Outcomes. Reports were clustered by each anomaly, and also by each and every combination of the anomalies that had been identified within the set of 40 reports. This resulted in 50 concepts (clusters); a top-down analysis of these concepts was conducted⁷.

The top-down analysis identified “significant” clusters. A cluster was considered significant if (1) it had none or few reports that were shared with other significant clusters, (2) contained a large percentage of all of the reports, and (3) collectively, the significant clusters contain nearly all of the reports.

This process highlighted four main groups of reports based on four anomalies: “Track or Heading Deviation,” “Airborne,” “Ground,” and “Near Mid-Air Collision (NMAC).” We point out that the three anomalies “Airborne,” “Ground,” and “NMAC” belong to the category called “Conflict” in the ASRS taxonomy of anomalies. So, we are able to state that we have identified two main Outcomes in the Scenarios of these 40 reports; namely, reports that deal with a spatial deviation (track or heading) and reports dealing with a conflict. This first stage of analysis also showed that the ASRS anomaly called “Non Adherence to a Clearance” was often encountered, but it seemed to be a shaping factor in the four mains groups identified.

In addition, a set of five reports contained all the reports that were not related to any anomaly of the taxonomy⁸ and two exceptions were identified. One exception was linked to an “Aircraft Equipment Problem” anomaly and the other one to an “In-Flight Encounter” anomaly. The following table summarizes the results. Of the five reports that do not belong to any of the four

⁷ Readers interested in how such a top-down analysis is performed can refer to the report by Maille [Maille (2002)] where a similar analysis is performed for 44 ASRS incident reports.

⁸ Some reports in the ASRS database have no identified anomalies but have been entered into the ASRS database because the ASRS experts considered the sequence of events to be interesting from a safety point of view.

identified anomaly categories, four reports are linked only to a problem of non-adherence to a procedure (i.e., a FAR or a clearance) and one report relates to an altitude deviation.

Report #	8	8	8	9	9	0	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2				
	1	1	6	3	9	4	2	1	4	1	6	0	3	3	4	1	3	1	5	7	1	2	4	0	3	5	3	4	6	9	0	6	0	4	4	3	4	6	8	9					
	0	8	9	4	6	4	2	1	6	9	0	8	7	4	7	1	2	3	0	4	9	7	5	6	4	4	6	2	9	8	8	5	7	8	3	0	5	6	2	1					
	7	7	0	1	9	1	9	9	5	1	3	9	4	6	1	7	1	7	8	5	7	2	3	9	2	8	7	9	3	5	9	9	8	5	6	9	9	2	9	6					
	5	1	8	0	9	7	3	0	5	7	8	3	2	9	7	8	5	0	9	1	0	8	0	2	8	0	2	1	4	8	3	5	6	1	0	7	3	0	6	2					
Track/Hd							*		*	*			*	*									*	*		*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*			
Airborne				*										*	*			*			*			*		*	*					*	*	*	*	*	*	*	*	*	*	*			
Ground												*				*																									*	*	*		
NMAC				*		*												*				*																							
Other	*	*									*						*														*														
InFlight							*																																						
Aircraft																												*																	

Table 7.1 – Clusters of Reports to Anomalies

7.3.2 Second step: Clustering on the Context

In the first step, we clustered the 40 reports by their Outcomes (the ASRS-defined anomalies). In the next step, we wanted to cluster on the shared Context within each significant cluster. This Context was fully described by the objective parameters as they were provided in the codification of each ASRS report. Therefore, we used the Kontex tool once again to cluster on each objective parameter and all combinations of objective parameters within a significant cluster of Outcomes. The idea was to explore all the possible concepts based on the formal codification of both the Outcome and the Context, and to determine whether a specific Context could be associated with each of the four particular Outcomes highlighted in the first step. The main results of this second stage of clustering and the top-down analysis are summarized here.

“Track and Heading.” The Context shared by the 12 reports identified with this anomaly is: “An aircraft is in the approach flight phase to an open and controlled airport. The aircraft is controlled at the beginning of the incident by the TRACON.” In addition, in most cases (in 9 of the 12 reports), the aircraft was in Class B airspace and parallel runways were active.

“Airborne.” The Context shared by the 10 reports in this category is: “Two aircraft are in the vicinity of an open and controlled airport. One of them is in the approach flight phase.” This shared Context by itself was not adequately discriminating, but the analyses showed an interesting group of 6 reports that shared the following properties: “The two aircraft are in the same phase of flight (approach) in the Class B airspace. There is some traffic and parallel runways are active.” The four other reports shared only the property of being controlled by the tower.

“Ground.” The Context shared by the 4 reports in this category is: “An aircraft is in the approach flight phase to an open and controlled airport. The aircraft is controlled by the Tower.” Then further analysis shows that the more common situation (3 reports) is that “there is another aircraft and some traffic.” The only report without another aircraft in the Context deals with a conflict between the first aircraft and airport workers on the runway.

“NMAC.” The Context shared by the 3 reports identified with this anomaly is: “Two aircraft are in the approach flight phase to an open and controlled airport. Parallel runways are active and there is some traffic. One aircraft is a Medium Large Transport (MLT) and the conflict develops while they fly in Class B and D airspace.”

At first glance, the four Contexts appear to be similar. Let us highlight their similarities and differences. They all deal with “an aircraft in the approach flight phase to an open and controlled airport.” This is not a surprise, as it is a direct consequence of our selection of this particular subset of 40 reports. Therefore the differences in Contexts rely on a finer level of granularity in the descriptions of the Contexts.

We point out, for example, that the three Contexts associated with conflicts (i.e., Airborne, Ground, and NMAC) contain the descriptors “**traffic**” and “**2 aircraft**” but not the descriptor “**TRACON.**” In contrast, the “Track and Heading” deviation category seems not to be directly influenced by the traffic or the presence of another aircraft, but generally starts to develop while the aircraft is still under the control of the TRACON (coordination during the transition of control from the TRACON to the Tower could be a source of Track and Heading deviations). Conflicts, on the other hand, are, as expected, directly related to a problem of traffic and to the simultaneous presence of two aircraft around the airport.

The differences in the Contexts associated with the three conflicts are more subtle. First the NMAC Context is a special case of the Airborne Context (2 aircraft in the same flight phase, traffic, parallel runways and class B airspace). This is an interesting result as we can also point out that the NMAC anomaly is a special case of airborne conflict. What makes the difference between the two contexts is that another airspace, D, is also involved in our NMAC Context and one aircraft is a MLT (military). Thus the differences between these two contexts are small, but the anomalies are also quite similar. It will require a larger set of reports and more detailed descriptions of the Contexts (more objective parameters) to give more reliable conclusions about the differences in what happened in these two cases.

We will now focus on the differences that automated clustering reveals in the Contexts associated with Ground and Airborne anomalies. The Ground context contains the descriptor **tower**, but **neither** the **same flight phase** for the 2 aircraft, nor the **class B** airspace, nor the **parallel** runways. Thus, for these 40 reports, airborne conflicts generally entail the presence of two aircraft in the same flight phase to an airport where parallel runways are active. In contrast, Ground conflicts develop only under tower control and are not directly linked to parallel-runway configuration, just as one would expect.

7.4 An Attempt to Capture the Why

As stated previously in this report, we have introduced into the formal codification one part of the Cinq-Demi taxonomy, which captures some conditions conducive to human error. This part related to understanding the Behavior of the Scenario was not a primary aim of this small case study, but as the Cinq-Demi codification was available, it required only a little additional work to see if there were interesting results.

The study of these added parameters indicated that nearly all the conflicts were associated with a misrepresentation of risk by the air traffic controller. (The concept of misrepresentation is first

introduced by Cinq-Demi as presented in Appendix B and is discussed further in Section 9 and Appendix E in this report.) Thus the behavior of the controller seemed to greatly influence the possible occurrence of a conflict.

The reports dealing with track and heading deviations seemed to be split into two clusters, depending on whether or not the flight crew had a correct representation of the trajectory of the aircraft. Thus either the behavior of the flight crew or that of the air traffic controller was a primary factor in the deviation. Moreover, for nearly all of the track and heading deviations, workload was a concern, while it seemed to be a marginal parameter in the case of conflicts.

7.5 Conclusions of the Case Study

This limited experiment showed that, within the phase of flight selected for the Context of these 40 reports, a first clustering process based on the description of the Outcome generated well-separated groups of reports. Then, the analysis of the related Contexts was able to point out discriminating parameters (e.g., active parallel runways and aircraft in the same phase of flight were related to airborne conflicts, while the transition from the TRACON control to the tower control was more relevant to track and heading deviations). Of course, with a so small a number of reports, one should be careful about the reliability and the generalization of the results. The purpose of this study was to test the value of the model, and not so much to come to conclusions about the links between Contexts and Outcomes in this small set of reports.

Moreover, the rough codification of the *why* shows that misrepresentation seems to be a common factor in all four of the anomalous outcomes of ICAC, and that some subjective parameters (for instance, workload) can be a contributing factor to some anomalies (or to some contexts). Furthermore, the indications are that a major clustering criterion for Behavior could be the anomalous performance of one or more people within the system.

8 Correlations between Outcomes and Contexts

8.1 Introduction

The Scenario model is concerned with the relationships among the Contextual factors of the last safe state, Behaviors, and anomalous Outcomes of a safety incident. We needed to test our capability to examine ASRS reports for evidence of such relationships⁹. In the fixed fields of the coded forms, ASRS database records contain a good deal of structured information relating to the Context and Outcomes of reported safety events, but very little structured information relating to the Behaviors of the people and automation that contributed to the incidents. Therefore, we limited this initial examination of ASRS data exclusively to the relationship between the Context of reported incidents and their Outcomes. As discussed previously, our intent was to extract information about Behavioral from the ASRS narratives¹⁰ and integrate that information into an

⁹ This section of this research report summarizes work done by a team of Battelle Pacific Northwest Division researchers. The team, under the leadership of Dr. Thomas Ferryman, included Ms. Amanda White, Dr. Christian Posse, and Ms. Andrea Swickard

¹⁰ ASRS reports narratives are a rich source of information regarding the behaviors of pilots, air traffic controllers, other persons, and automated agents during the course of safety events. However, the unstructured nature of these data creates an analytical challenge.

expanded future analysis if this initial investigation proved fruitful. Moreover, we have said that this first stage of filtering based on similarities of the Context and the Outcome (to define what happened) was desirable prior to undertaking the next step of automated analysis (to gain information about why). This experiment was intended to demonstrate that we had the capability to accomplish the first stage and produce useful and sensible results.

8.2 Goals

The goals of this investigation were to determine whether

1. There are statistically significant relationships in ASRS incident reports between coded Contextual Factors, on the one hand, and coded anomalous Outcomes, on the other.
2. Any such statistical relationships that are observed in ASRS data are amenable to operational interpretation by subject-matter experts.

8.3 Approach

During this research effort we:

1. Created a structured analysis table from the ASRS data.¹¹
2. Examined the statistical relationships between the parameters of the Context and those of the Outcomes using the (a) Classification And Regression Tree (CART) method, and (b) cross-tabulation analysis.
3. Clustered the parameters of the Context found in the ASRS data into groups based (roughly) on their frequency/infrequency of co-occurrence. These groups can be thought of as recurring *Contextual Patterns*.
4. Examined the statistical relationships between “Contextual Patterns” and anomalous Outcomes using cross-tabulation analysis and developed graphical depictions of the results to aid their interpretation.
5. Presented the findings to subject-matter experts (SMEs) to determine whether the patterns revealed by the statistical analyses were operationally plausible.

This section of the report summarizes the approach and findings of that investigation.

8.3.1 Data/Taxonomies

Data for this research were 109,225 records obtained from the ASRS database.

¹¹ Each row in the table corresponded to a reported ASRS incident. Columns described the contextual factors present during the reported event and an anomalous outcome that resulted. Since any given ASRS report may describe more than one anomaly, some reported events appear more than once in the analysis table.

Scope of Database

The scope of the analysis was limited to ASRS incidents involving at least one air transport on a passenger or freight mission flying under Part 121 rules.

Context Parameters

As noted previously in Section 4 and Appendix C, many of the parameters of the Context relevant to safety incidents are encoded in ASRS fixed fields. The coded parameters of Context used in this study fall into the following categories:

- **Time** including year, month, day of week, and quarter of day
- **Place** including altitude, location (airport, intersection, etc.) and involved ATC facilities.
- **Physical environment** including flight conditions (VMC/IMC), ceiling, visibility, and light conditions (dawn, day, dusk, night).
- **Aircraft characteristics** including make-model (implicitly, weight, number of engines, etc.), mission, navigational-method-in-use, and flight phase.
- **Hazardous situational factors** including problematic airport configurations, airspace designs, departure/approach procedures, navigational aid configurations, and ATC/airport procedures.

We used 257 ASRS codifications of parameters of Context that fall into the above categories¹². This set of fixed fields was supplemented with 267 context-related words extracted from the report narratives. CART analysis can accommodate large numbers of potential explanatory variables. However, cross-tabulation analyses lose statistical significance when cell sizes become too small. Thus, for the purposes of the cross-tabulation analysis, it was necessary to cluster ASRS parameters of Context into *Contextual Patterns* (groups of Context parameters evidenced by very frequent or very infrequent co-occurrence).

We arrived at these *Contextual Patterns* using standard clustering methods. The raw data evidenced 2,882 distinct sets of Context parameters (excluding location identifiers). A hierarchical clustering method was used to group these into ten *Contextual Patterns*. These are broadly described in Table 8-1. Each ASRS report was associated, in a multi-variate sense, with one of these ten *Contextual Patterns* based on its proximity to the centroid of a *Contextual Pattern*.

¹² We did not treat individual locations as distinct parameters of Context. If we had, the number of such factors would have been measured in the thousands.

Table 8-1. Key Characteristics of the 10 Dominant *Contextual Patterns* Observed in the ASRS Data Set

Contextual Pattern	Context Paramters Unusually Present in Pattern Members	Context Paramters Rarely Present in Pattern Members
1	climb phase	thunderstorm; military/small aircraft
2	adverse weather	military aircraft, special purpose aircraft, ultralights;
3	military aircraft, special-purpose aircraft, ultralights; adverse weather	
4	descent phase	small aircraft; adverse weather
5	military fighters and trainers; mid-size transports	adverse weather (except thunderstorms)
6	ground phase	adverse weather
7	precipitation and obscuration factors; military aircraft	cruise phase
8		military aircraft; adverse weather factors
9	Landing phase	military aircraft, special purpose-aircraft, ultralights; adverse weather
10	military aircraft, special-purpose aircraft, ultralights	adverse weather

Outcome Categories

With the aid of aviation-domain experts, we selected ten anomalous Outcome categories from among the anomalies defined in Appendix D for our analysis. The chosen Outcomes were easily mapped to ASRS codifications. Table 8-2 shows the chosen Outcomes and the corresponding ASRS Anomaly codes that were observed in the 109,225 reports of the ASRS database used in this study. Any given aviation safety incident may involve more than one adverse Outcome. For example, many ASRS incident reports that involve Outcomes 1 through 8 (or 10) also fall under Outcome 9, Non-Adherence to Rules. Thus, some reported incidents appear more than once in the analysis data set.

Table 8-2. Anomalous Outcome Categories Used in the Study

Outcome Category		Relevant ASRS Anomaly Codes	# of Reports
Set	Label		
1	Aircraft Equipment Problems	Aircraft_Equipment_Problem.Critical Aircraft_Equipment_Problem.Less_Severe	21,802
2	Altitude Deviation	Altitude_Deviation.Overshoot Altitude_Deviation.Undershoot	8,018
3	Airborne Conflict	Conflict.Airborne_Critical Conflict.Airborne_Less_Severe Conflict.NMAC	14,427
4	Ground Conflict	Conflict.Ground_Critical Conflict.Ground_Less_Severe	4,637
5	Runway Incursions ^{13*}	Incursion.Runway.Other	4,201
6	Landings without Clearance	Incursion.Landing_Without_Clearance	1,057
7	Inflight Weather Encounters	Inflight_Encounter.Weather	4,472
8	Maintenance Problems	Maintenance_Problem.Improper_Documentation Maintenance_Problem.Improper_Maintenance	2,371
9	Non Adherence to Rules	Non_Adherence.Clearance Non_Adherence.FAR Non_Adherence.Published_Procedure	47,748
10	Airspace Violations	Airspace_Violation.Entry	490

8.4 Results

8.4.1 CART Analyses

Three Classification And Regression Tree (CART) analyses were performed. These analyses differed with respect to the Context parameters that were used as explanatory variables as follows:

Analysis 1: Used 257 Context parameters drawn from ASRS fixed fields.

Analysis 2: Used a reduced set of 84 Contextual parameters drawn from ASRS fixed fields.

Analysis 3: Used 267 context-related words drawn from the ASRS report narratives.

Analyses 1 and 2, which relied on ASRS fixed fields as the source of contextual information, seemed to produce the best results. One plausible explanation is that the coding in ASRS fixed fields, which draws on all information in the ASRS reporting form, is more consistent than contextual references in report narratives. Table 8-3 provides summary output for Analysis 2, which yielded the most useful CART results.

¹³ The ASRS defines a runway incursion to include any use of a runway that is not authorized by ATC. Thus, Outcome Category 5, Runway Incursions. Other, would be more properly labeled “Runway Incursions. Other Than Landings Without Clearance”. Landings without clearance were separately categorized for the instant analysis as ADS 6.

Table 8-3. CART Analysis Results Showing Connections among 84 Context Parameters Coded in ASRS Fixed-Fields and Anomalous Outcomes

Outcome Category		Context Parameters with the Most Statistical Explanatory Power
Set	Label	
1	Aircraft Equipment Problems	Mission is passenger, flight phase is climbout~intermediate altitude, climbout~takeoff, other~emergency, other~divert, cruise~level, cruise~other, ground~preflight or ground~parked, may involve a low-wing aircraft or widebody transport, mission is passenger
2	Altitude Deviation	Flight phase is climbout~intermediate altitude or descent~other or descent~intermediate altitude
3	Airborne Conflict	Two or more crews involved, flight phase is cruise~level, cruise~other, climbout~initial, climbout~takeoff, descent~approach, two or more aircraft involved, low-wing aircraft
4	Ground Conflict	2 or more crews involved and flight phase is ground~other, ground~holding, ground~preflight, ground~taxi, ground~parked, climbout~takeoff, landing~roll or landing~other, aircraft may be widebody or medium large transport
5	Runway Incursions. Other	2 or more crews involved, flight phase is ground~other, ground~taxi, ground~hold, ground~position and hold
6	Landings without Clearance	Flight phase is landing~other, landing~roll or descent~approach, may involve 2 or more crews
7	Inflight Weather Encounters	Flight phase is cruise~other, descent~approach, descent~other or landing~other, may involve high wing aircraft or 2 or more crews
8	Maintenance Problems	Flight phase is ground~maintenance, ground~parked or cruise~level, may involve low-wing aircraft
9	Non Adherence to Rules	no positive evidence
10	Airspace Violations	Flight phase is cruise~level, may involve low-wing aircraft

8.4.2. Cross-tabulation Analysis

We cross-tabulated the data set using the ten identified *Contextual Patterns* as the rows and ten chosen anomalous Outcomes as the columns. We then computed the ratio between the number of observations in each cell and the statistically expected number of observations. Figure 9-1 shows the results. It is color-coded to highlight ratios that are unexpectedly high, and those that are unexpectedly low.

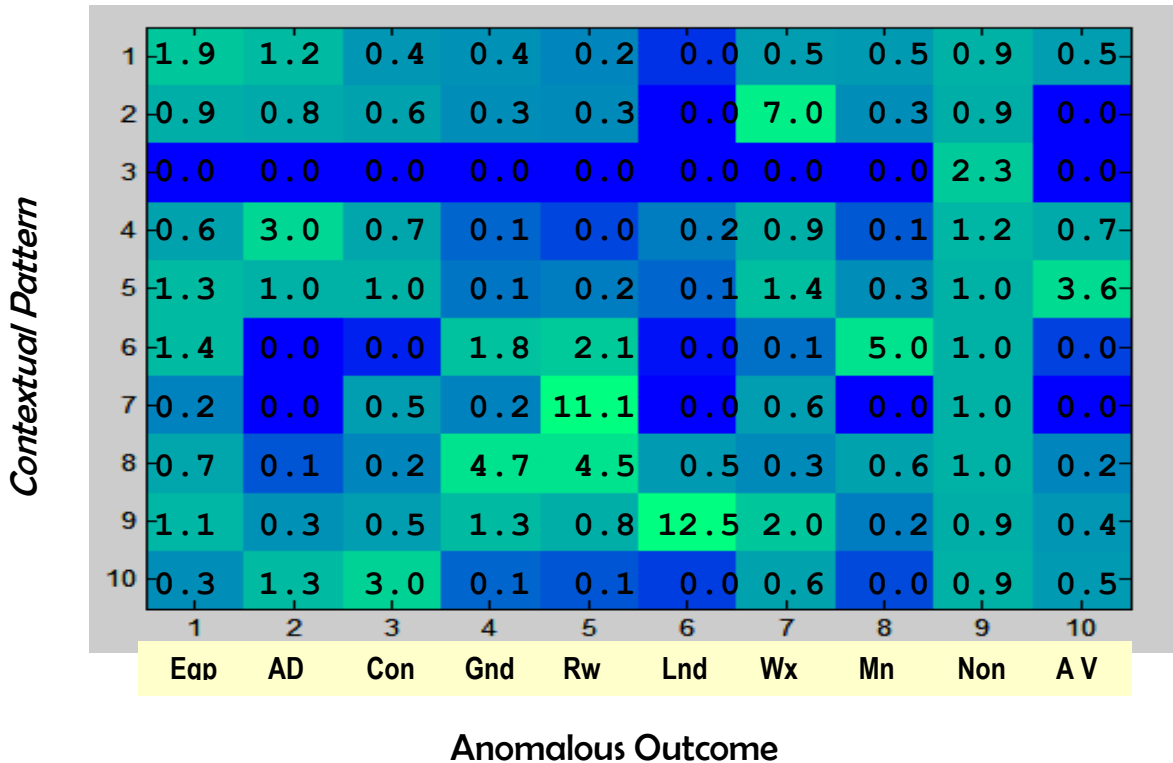


Figure 8. Cross-tabulation Results Showing Ratio of Observed Over Expected Cell Frequencies

Figure 8 clearly reveals strong statistical relationships between the *Contextual Patterns* and anomalous Outcomes described in ASRS incident reports. For example, *Contextual Pattern 2* (roughly, adverse weather) is negatively correlated with Outcome 6 (landings without ATC clearance). This is consistent with prior ASRS research that suggested that most landings without clearance occur in VMC conditions. Favorable weather can contribute to flight crew complacency and associated errors of omission. Context 10 (roughly, the presence of military or special purpose aircraft in adverse weather) appears to significantly increase the statistical likelihood of Outcome 3 (airborne conflicts). Aviation-domain experts agree that airborne conflicts are more likely to arise when aircraft with very different performance characteristics (e.g., air transports, military aircraft, or special purpose aircraft) are in the same traffic mix. This potential is heightened in marginal weather conditions. Similar interpretations can be made of a number of other statistical relationships observed in the cross-tabulation results.

8.5 Lessons Learned

While far from definitive, the research described in this chapter yielded some important lessons. First, we are encouraged to believe that relationships that are both statistically and operationally meaningful exist between Context (as described by parameters in the ASRS fixed fields), on the one hand, and specific types of unwanted aviation safety Outcomes (in particular, ASRS

anomalies), on the other. Second, we recognize that the multiplicity of Context parameters that may be present during aviation safety events creates analytical challenges (i.e., the dimensionality needs to be reduced through recurrent pattern identification). Third, we recognize the danger that studies such as these can produce analytical results that are tautologies (things true by definition) rather than true insights. This happens when an Outcome has parameters of the Context built into its definition (e.g., the Outcome “landings without clearance”, by definition, occur during the Context “landing phase”). Fourth, we appreciate more fully the value of bringing domain expertise into the research process at the beginning of the research study rather than reserving its application to the interpretation of research results at the end. Domain expertise can be used to achieve dimensionality reduction based on operational rather than mathematical considerations, identify implicit tautologies, and otherwise assist study design and execution.

9 On the Codification of the *Why*

We now come to the primary purpose of this study.

In Section 5, we described our concept of the Scenario,

SCENARIO = {CONTEXT + BEHAVIOR → OUTCOME},

in which we consider the Context to be that of the last safe state and the Behavior results in the transition to the Outcome. When the Outcome is an anomalous (unwanted or compromised) state, the last safe state is identified as a precursor.

In the experiment discussed in Section 8, we analyzed incidents on the basis of similar patterns of parametric values defining their Contexts and their Outcomes. We have adequately described *what* happened in this first stage of analysis, but we have not yet identified the causal factors of the Behavior that produced the transition from the last safe state to the unwanted Outcome – the *why*. For this, we must rely on a second stage of analysis. We will use the results of the analysis of *what* happened combined with aviation-domain knowledge to minimize the extent of the world that the automated tools must consider in this second stage of analysis.

In order to answer the most important human-factors questions about an incident, we must extract causal information from the free narrative of the incident report. We need not do a perfect job of this. The identification of *what* happened in the first stage of analysis already achieves much of what is needed for an effective retrospective search. Furthermore, our aim is not a definitive explanation of why a given incident occurred. We cannot expect to automate a completely reliable understanding of the *why*. We only need the capability to expedite a search on the *why*, to enable an exploration of their commonalities, and to minimize the labor of the human expert in arriving at a satisfactory explanation. It is sufficient to restrict the space of possible causal factors, and, in some cases, to identify a set of related incidents that includes almost all those that would be selected by an expert as similar to the target incident.

It is fortunate that we do not have to be perfect in automatically extracting precisely *why* events happened, because this study is based solely on ASRS incident reports. As products of a voluntary reporting system, the reports in the database have some inherent limitations. They cannot be viewed as a random sample of the population of aviation incidents, they may contain reporting biases, and their factual correctness cannot be verified. Moreover, retrospective experiential reports like the ASRS reports are not reliable reports about why incidents happened. Ericsson and Simon (1993) have reviewed and analyzed many decades' worth of research on the uses of verbal reports. They state that people have very limited ability to verbalize their own perceptual and cognitive processes and that people have little ability to provide reliable explanation about their behavior during a high-stress event after a short time has passed. Furthermore, they say that people cannot report on the perceptual and retrieval processes that determine which thoughts or patterns reached their attention or why a given thought was attended. These limitations on self-reporting are relevant and of concern to our experiment based on aviation incident reports.

Perhaps the best we can hope for is to extract from aviation incident reports a sequentially correct report of the most salient attended objects and events, especially those attended during impasses in normal, smooth performance. For the most part, the reported events will relate to the *what*, but

when they are related to *why*, they are almost certain to be directly linked to concrete perceptual factors. While this source of our information about the *why* may be flawed, it is nevertheless the best source we have for the operator's perspective of the incident, and it deserves to be mined for whatever information it contains.

In this second stage of automated analysis, we need to rely on knowledge of human behavior to narrow the possibilities of the *why* in order to "aim" the automated system in the proper direction. In fact, at this stage of the research, we are willing to omit many plausible (albeit rare) causal factors of human behavior (such as physiological and psychomotor factors) if we can aid the analyst in the identification of a few important common ones. In our initial attempt to cope with this complex problem, we propose that the Behavior entailed in transitioning from the safe state to a compromised or anomalous state of the Outcome is always associated with a loss of "Situation Awareness" on the part of one or more humans in the system.

Endsley (1988) defines Situation Awareness (SA) as a person's "*perception of the elements in the environment within a volume of time and space, the comprehension of their meaning, and the projection of their status in the near future.*" SA is a label that is often used to refer to many of the cognitive processes entailed in attentional dynamics, maintenance of a world model, and prediction. This definition fits well with our limited view of Behavior as we use it in the concept of Scenario. SA, as applied to our world of aviation, is concerned with the operational state of an expert human performer in a dynamic and potentially dangerous environment. Studies of SA have addressed a variety of other "worlds" including challenging military operations, such as command and control in joint-operations combat, automobile-racing drivers, anesthesiologists, space mission ground-controllers, and firefighters. We base our approach on the substantial body of literature reporting on a variety of perspectives of SA and its role in human behavior. [See, for example, Durso and Gronlund (1999), Shively et al. (1997), and Sohn and Doane (2000).]

A loss of SA is similar to the concept of Misrepresentation that is an "Error Factor" in Cinq-Demi's GOOF grid. (See Appendix B.) Cinq-Demi uses Misrepresentation to mean situations when the model used by the operator to understand events and act accordingly is, for any reason, not consistent with the "real world." According to Cinq-Demi, Misrepresentation involves the performer's failure to update his or her mental model of system status; it can also involve use of a decision model that may be generally valid, but is too simple or is inappropriate to the situation.

This notion – that the loss of SA (or Misrepresentation) always underlies the Behavior associated with the transition from a safe state to a compromised or anomalous state – has some justification, at least, as it may apply to ASRS reports. In every study we have conducted in which the full analyses using the Cinq-Demi methodology have been applied to ASRS reports, we have concluded that Misrepresentation dominated all of the Error Factors. Further, experienced ASRS analysts agree that "Misrepresentation" (in its most general interpretation) is the dominant factor in, by far, the majority of the ASRS reports in the database, except in some cases of equipment failure.


Hartel et al (1991) found SA to be the leading causal factor in a review of 175 military aviation mishaps. Endsley (1995a) investigated the causal factors underlying aircraft accidents involving major air carriers from 1989 to 1992. Of 24 accidents, 17 involved human error and, of these, 15 were associated with a failure of Situation Awareness. Endsley concluded, "*This study provides good evidence that problems with Situation Awareness are indeed a primary factor underlying*

aviation accidents.” This conclusion was further validated by the results of the studies of ASRS data reported in Jones& Endsley (1996) and Gibson et al (1997), although these entailed only small subsets of incident reports from the ASRS database.

Therefore, we decided to start our study of the content of the ASRS database with the assumption that the human behavior failures of every ASRS-reported incident entail loss of Situation Awareness (SA). However, while we may assume that loss of SA explains everything, in fact, SA, per se, explains nothing because it is non-constructive and insufficiently discriminating. To make progress with the analysis and measurement of our conceptual model, it is necessary to break SA down into more concrete and constructive components. Fortunately, we can draw on an extensive SA research literature to accomplish this. (See Appendix E for a discussion of this literature and research in related domains of human factors, skilled performance, and behavioral decision theory. Appendix E also discusses some of the complex processes and interactions that we are ignoring in this initial experiment.)

The human-factors research community [See, for example, Endsley (2000a), Endsley (2000b), and Shively, R.J. et al (1997)] has identified the following sequential stages or aspects of Situation Awareness:

SITUATION AWARENESS



We propose that the discriminating factors of Behavior in our model of Scenario are failures to Detect, Recognize, Interpret, Comprehend, or Predict (DRICP). (See Appendix E for descriptions of each of these five components of SA.) This provides us with a definitive, constructive model to guide the automated clustering. Moreover, the automated clustering processes to be used in this experiment lend themselves to testing this assumed model, as will be described later.

The DRICP determinants of SA are constructive in the sense that each might be identifiable with specific words or phrases in a set of reports and, further, they offer some promise of our being able to relate each to specific objective parameters of the Contexts and Outcomes of each Scenario. These features can be useful to “tuning” the automated analyses of this second stage, as will be described later.

A number of previous studies have highlighted levels or stages of SA that are closely related to our DRICP list of discriminating components. For example, Endsley developed the taxonomy in Table 9-1 for classifying and describing errors in SA. [Endsley (1994), (1995a), & (1995b)] The factors affecting SA at each of the three levels of Table 9-1 correspond to the DRICP components

of SA we propose to use. Detection and Recognition are necessary for Level 1 SA. [Endsley (1996),(2000a), & (2000b)] Interpretation and Comprehension are necessary for Level 2 SA. [Endsley (1996), (2000a), & (2000b)] A person with Level 2 SA has been able to derive operationally relevant meaning and significance from the Level 1 data perceived. Endsley (2000a) & (2000b) emphasizes that the defining role of prediction is the highest level (Level 3) of SA. We may find that it is not possible to discriminate automatically to the five levels of detail of DRICP, in which case we will try to adapt our analyses to Endsley’s three-level taxonomy of perception, comprehension, and projection. In any case, Endsley’s lower-level descriptions of each of the three levels in Table 9-1 will help us develop representative concepts, words, or phrases that a reporter of an incident might use to indicate which of the components of SA he or she lost.

Jones and Endsley (1996) found that experts achieved a limited degree of success in categorizing a small sub-set of ASRS reports at these three levels of Table 9-1. They also found that the distribution of errors among the three SA Levels in the 143 ASRS incident reports of this study was similar to that found in a previous study of 17 NTSB accident reports. [Endsley (1995b)]

Table 9-1. Taxonomy of Levels of Situation Awareness

Level 1: Fail to perceive information or misperception of information
<ul style="list-style-type: none"> • Data not available • Hard to discriminate or detect data • Failure to monitor or observe data • Misperception of data • Memory loss
Level 2: Improper integration or comprehension of information
<ul style="list-style-type: none"> • Lack of or incomplete mental model • Use of incorrect mental model • Over-reliance on default values • Other
Level 3: Incorrect projection of future actions of the system
<ul style="list-style-type: none"> • Lack of or incomplete mental model • Over-projection of current trends • Other

With this assumed model of Behavior, we now have a taxonomy of sequential, constructive, discriminating factors of Behavior that could help explain the *why* and *how* of an incident. We next need to identify which of these behavioral factors (i.e., failure to Detect, Recognize, Interpret, Comprehend, or Predict) were present in the Scenario of the subset of incident reports developed from the first stage of clustering on *what* happened. Then we need to identify those objective parameters of the Context that are related to the identified behavioral factors.

Currently, we expect to do the following in the experiments that we will conduct during the next year and will report the results in Volume II. (This corresponds to the second and third stages of analysis in the procedure diagrammed in Figure 9.):

1. An expert in human factors will work with aviation-domain experts (ASRS analysts) to develop representative concepts, words, or phrases that a reporter of an incident might use to indicate the components of SA (DRICP). Examples are presented in Table 9-2.

Table 9-2 Representative Textual Expressions

	Concepts	Words	Phrases
Lack of Detection	threshold, change, adaptation level, signal quality, discrimination, noise	did not notice, see, hear, monitor	I did not notice that the MCW light was on. We were not monitoring altitude.
Lack of Recognition	attention, familiarity, type/kind/category, importance	misunderstood, misread, misheard, confused, unknown, novel, new, unfamiliar	An unfamiliar annunciation appeared on the MCP. PNF mis-heard the clearance.
Lack of Interpretation	relations, reasoning, language, training, specialized knowledge	incorrectly, not fully, incompletely; not realize meaning, importance	CAPT did not realize how soon we needed to start the descent.
Lack of Comprehension	causality, explanation, diagnosis, intervention, FDIR	lost track of, mistake, wrong, error, why, misunderstand	We did not understand why the altitude capture failed. [notice in this case how detection, recognition, and interpretation are satisfied: 'the altitude capture failed' is an interpretation of cockpit information that has been detected and recognized; still there can be a comprehension failure]
Lack of Prediction	prediction, preparation, expectation, prevention, avoidance	not expect, unexpected, unforeseen, not remember to	The weather had deteriorated at our alternate. We got an unexpected runway change.

2. We will then use such exemplary phrases with the tool called Perilog [McGreevy & Statler (1998) and McGreevy (2005)] to search the entire ASRS database for similar phrases. On the basis of that search, we will develop a set of words, phrases, and phraseologies related to each of the discriminating components, DRICP, of SA.
3. With the help of aviation-domain experts and experts in human factors, we will develop subsets of the previously labeled subjective parameters from the “full and complete” set of parameters that relate to each of the components of SA. We will then use the set of phrases developed in step 2 above, together with the subset of subjective factors associated with each of the discriminating components of SA, to “tune” the automated analysis in the second stage of analysis. This second stage will cluster reports by similarity of the failures in SA (i.e., failure to detect and/or to recognize and/or to identify, etc.) that occurred from each cluster of incident reports identified in the first stage of analysis as similar on the basis of what happened.
4. Again, an expert in human factors will work with ASRS analysts to identify which of the objective parameters of the Context might relate to a failure of each of the discriminating components of SA (i.e., which of the objective parameters might contribute to a failure to Detect, which to a failure to Recognize, which to a failure to Interpret, which to a failure to Comprehend, and which to a failure to Predict). This step is intended to guide the automated search of the next step.

5. The automated analysis in Step 3 identifies which of the components of SA pertain to the Behavior of the common Scenario in a cluster of incident reports. Next we will automatically compare the objective parameters of the Context for that Scenario with the list of those parameters that the experts identified as relevant to each of the pertinent components of SA. This comparison will enable us to identify the subset of objective parameters of the Context that is related to each of the discriminating factors of the Behavior identified with that Scenario.

We use the DRICP framework as though Detection, Recognition, Interpretation, Comprehension, and Prediction occur in sequential order, each successive stage using the output of the preceding stage. It is tempting to believe that we might, thereby, extract some information from the narrative about the sequence of events. However, as Carroll et al.(2001) documents, citing Neisser (1976), human cognition is a cyclic process in which prediction facilitates comprehension and interpretation, and in which comprehensible and interpretable events are more easily detected and recognized than are unpredictable and incomprehensible events. In fact, Jones and Endsley (1996) point out that many Level 2 SA errors (for example, misinterpretation of landmarks) can be attributed to incorrect expectations (erroneous predictions), which then cause a persistent misrecognition and misinterpretation of perceptual data.

During the next year, we expect to conduct the experiment described above; applying the paradigm of Situational Awareness to automated clustering on the parameters extracted from ASRS incident reports associated with erroneous human Behavior. We will present the results of this experiment in Volume II to this report that is in preparation.

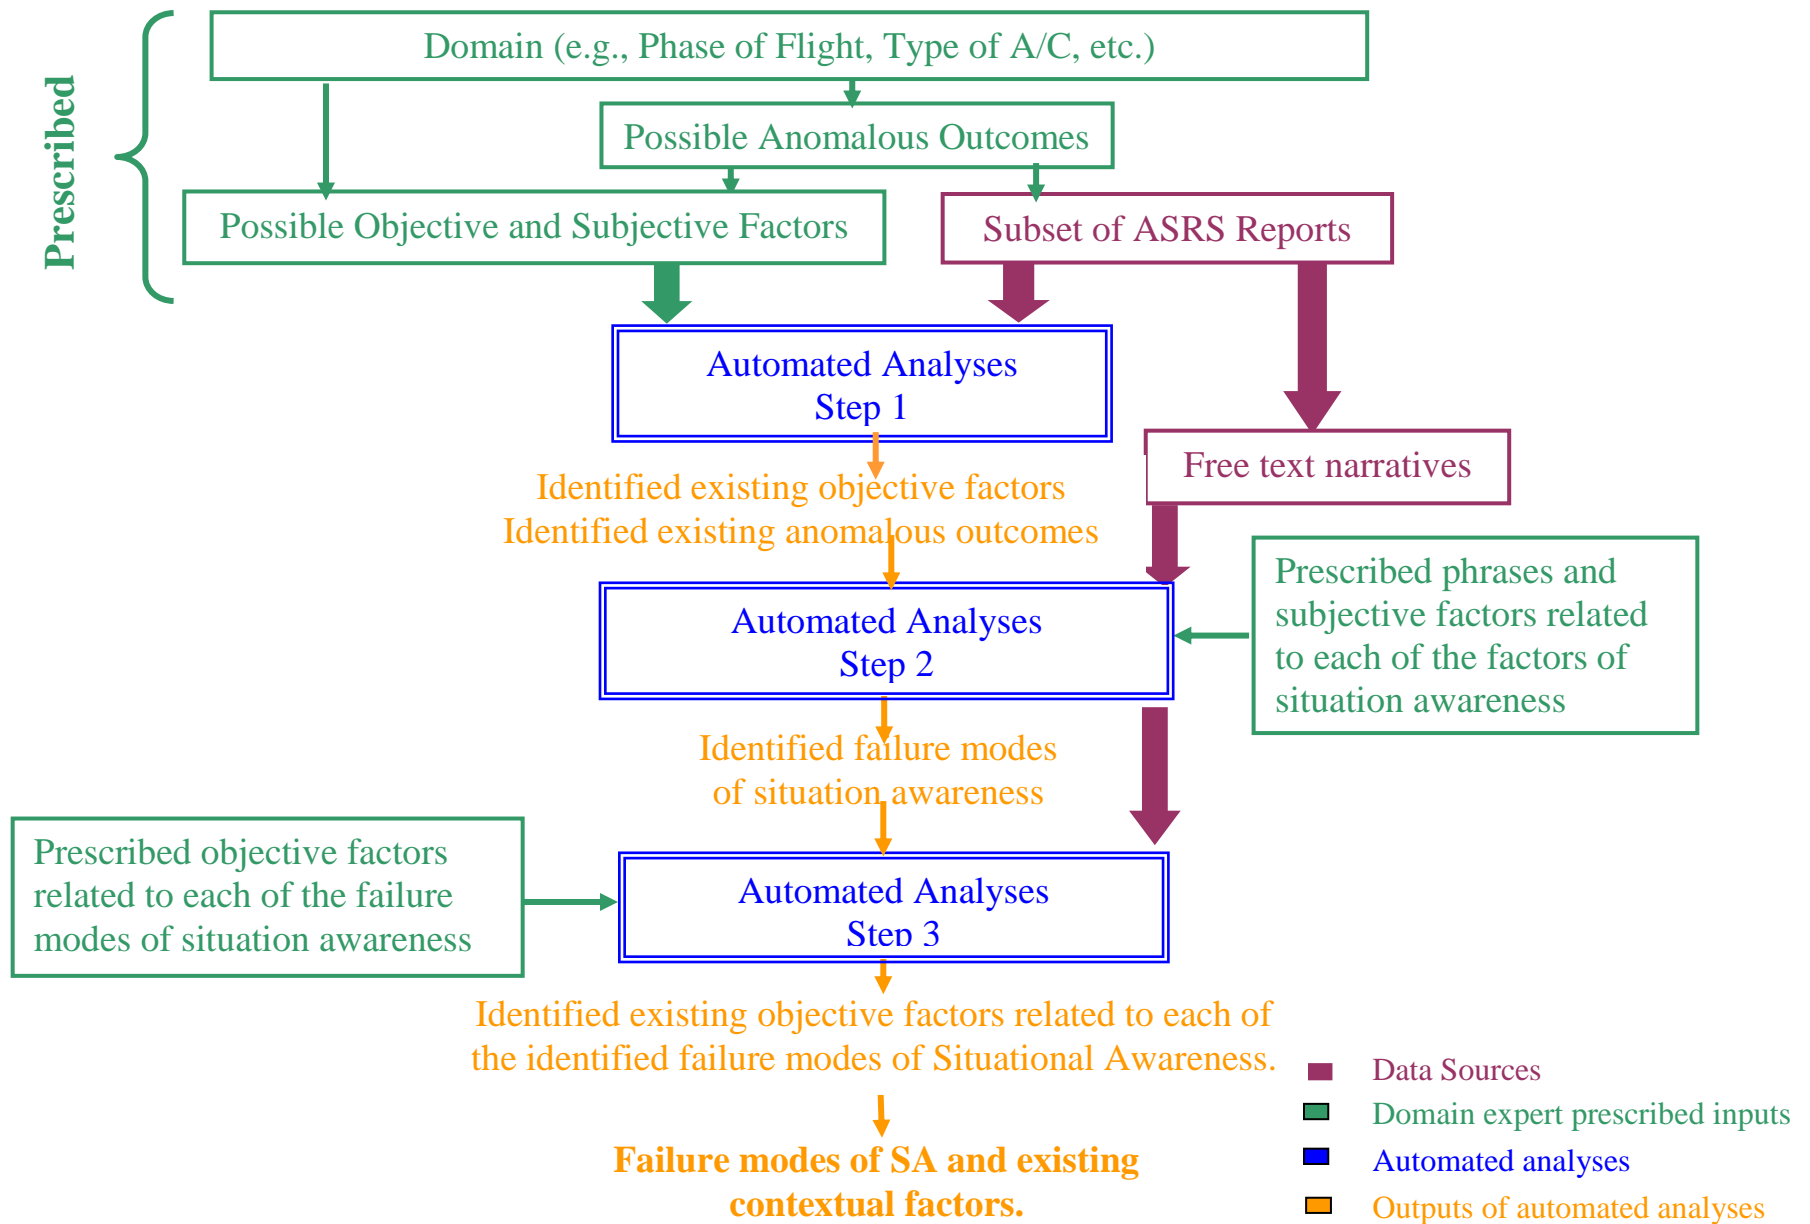


Figure 9. Process for Second Stage Analysis

10 Summary and Projections

In this study, we have defined a generic structure of information (a taxonomic model) that is postulated to be a sound basis for defining similarities between incidents like those described in ASRS-like aviation incident reports. On the basis of this structure, we have introduced the simplifying structure of the Scenario as a pragmatic guide for identifying similarities of what happened based on the objective parameters that define the Context and the Outcome of a Scenario.

We believe that it is possible to design an automated clustering process guided by the structure of the Scenario, and that the results will be easy for human experts to understand. We have identified the “full and complete” set of parameters that define the Context of the initial safe state, and the anomalous Outcome. Our assumption is that this complete set of parameters adequately describes what happened. Automated tools will use the values of these parameters to identify the Scenario and to analyze similar scenarios from the ASRS database based on what happened. We have demonstrated the validity and potential of this approach in the experiments described in this report.

The limited experiment of the “Case Study” discussed in Section 7 showed, within the limitations of the small number of reports used, the value of the Scenario model for clustering reports based on similarities of Context plus Outcome. Moreover, the rough codification of the *why* for this small set of reports showed that misrepresentation was a common factor and identified some subjective parameters that can be contributing factors to Behavior. This experiment encouraged us to continue with our approach to analyzing free text for information on why an incident occurred.

Then we used our current automated capabilities to analyze the objective parameters as they are coded in the current ASRS database. We considered the dominant cluster to be representative of the Context of each Scenario, and determined that there are certain common dominant factors associated with each anomalous Outcome. We cross-tabulated the data set using ten identified *Contextual Patterns* as the rows and ten chosen anomalous Outcomes as the columns. We then computed the ratio between the number of observations in each cell and the statistically expected number of observations. We concluded that relationships that are both statistically and operationally meaningful exist between the parameters of the Context, on the one hand, and those that identify the specific types of unwanted aviation safety Outcomes, on the other. We recognized that the multiplicity of contextual factors that may be present during aviation safety events creates analytical challenges (i.e., the dimensionality needs to be reduced through recurrent pattern identification). This report has presented an approach to a first-generation process for routinely searching large databases of aviation accident or incident reports, and consistently and reliably analyzing them for objective factors (the what of an incident) as well as the causal factors of human behavior (the why of an incident). We have proposed a method for applying the paradigm of Situational Awareness – with its five components of Detection, Recognition, Interpretation, Comprehension, and Prediction – to automated clustering on the objective and subjective parameters associated with erroneous human Behavior from the free-text narrative of an incident report. We believe that the results of this process will aid decision makers in identifying effective interventions for the elements of human error identified in incident and accident data.

We have assumed a simple model for describing the human behavior associated with the transition to an anomalous state in our concept of the Scenario. While the research literature documents the very high frequency with which human error can be related to loss of SA, there are likely other factors besides loss of SA that could influence transitions in some scenarios. Also, certainly, not all of the contextual factors of the last safe state prevail unchanged throughout the transition, and those changes both influence and are influenced by the human actions on the system. Nevertheless, we maintain that our simplified model of Scenario and Behavior is both necessary and justifiable in this first generation of automated analyses of free text. It is necessary to keep the analysis tractable within currently available capabilities, and it is justifiable because there is every reason to believe that ASRS narratives are usually delivered as rational explanations of why an incident occurred. The research process will be designed to continuously question our assumptions, and our simplifications will be corrected as required through future investigations.

The plan is to continue to develop and enhance the automated capability to correlate Context and Outcome by incorporating additional domain knowledge. For this first-generation process, we believe that it is essential to (1) maximize the information from the objective parameters about what happened in order to minimize the domain for analyzing why it happened, and (2) assume a simplified model of Behavior to begin to analyze automatically for an understanding of why. In the experiment to be conducted during the next year, we will evaluate the ability to automatically extract useful information about why a set of similar incidents occurred based on this simplified model.

11 References

- [1] Boeing Report (2002). *2001 Statistical Summary*. Seattle, WA: Boeing Aircraft Company Report
- [2] Boeing Report (2004). *2003 Statistical Summary*. Seattle, WA: Boeing Aircraft Company Report
- [3] Chappell, S. (1997). Using Voluntary Incident Reports for Human Factors Evaluations. In N. Johnston, N. McDonald, & R. Fuller (Eds.), *Aviation Psychology in Practice* (pp. 149-169), VT: Ashgate
- [4] Chaudron, L., & N. Maille. (2000). Generalized Formal Concept Analysis. In *Conceptual Structures: Logical, Linguistic, and Computational Issues*, LNAI 1867, 357-370, Springer.
- [5] Chidester, T.R. (2001). An Overview of the Enhanced Aviation Performance Measuring System. In *Fifth GAIN World Conference Proceedings and Products*, Miami, FL, December 5-6, 2001.
- [6] Chidester, T.R. (2003). Understanding Normal and Atypical Operations through Analysis of Flight Data. In *Proceedings of the 12th International Symposium on Aviation Psychology*, Dayton, Ohio.
- [7] Connell, L. (1999). Incident Reporting: The NASA Aviation Safety Reporting System. *GSE Today*, 66-68.

- [8] Durso, F.T., & S.D. Gronlund. (1999). Situation Awareness. In *F.T. Durso, R Nickerson, R. Schvaneveldt, S. Dumais, S. Lindsay, & M. Chi (Eds.), The handbook of applied cognition.*, New York: Wiley, 283-314.
- [9] Endsley, M.R. (1988). Design and Evaluation for Situation Awareness Enhancement. In *Proceedings of the Human Factors Society 32nd Annual Meeting*, Santa Monica, CA: Human Factors Society 1988:97-101
- [10] Endsley, M.R. (1994). Situation Awareness in Dynamic Human Decision Making: Theory. In *R.D. Gilson, D.J. Garland, J.M. Koonce, (Eds.), Situational Awareness in Complex Systems.* Orlando, FL: Embry-Riddle Press, 27-58.
- [11] Endsley, M.R. (1995a). Toward a Theory of Situation Awareness in Dynamic Systems. *Human Factors*, 37(1), 32-64.
- [12] Endsley, M.R. (1995b). A Taxonomy of Situation Awareness Errors. In R. Fuller, N. Johnson, N. McDonald (Eds.), *Human Factors in Aviation Operations: Proceedings of the Western European Association of Aviation Psychology 21st Conference*, Dublin Ireland: Avebury Aviation.
- [13] Endsley, M.R. (1996). Automation and Situation Awareness. In *R. Parasuraman & M. Mouloua (Eds.), Automation and Human Performance*. Mahwah, NJ: Lawrence Erlbaum.
- [14] Endsley, M.R. (2000a). Theoretical Underpinnings of Situational Awareness: A Critical Review. In *M.R. Endsley & D.J. Garland (Eds.) Situation Awareness Analysis and Measurement*. Mahwah, NJ: Lawrence Erlbaum Associates.
- [15] Endsley, M.R. (2000 b). Situation Models: An Avenue to the Modeling of Mental Models. In *Proceedings of the 14th Triennial Congress of the International Ergonomics Association and the 44th Annual Meeting of the Human Factors and Ergonomics Society*. Santa Monica, CA: HFES.
- [16] Ericsson, K.A., & H.A. Simon. (1993). *Protocol Analysis: Verbal Reports as Data*. Second edition. Cambridge, MA: MIT Press.
- [17] Ferryman, T.A. (2001). Cluster Analysis of Digital Flight Data for the Aviation Performance Measurement System. In *Proceedings of American Statistics Association*. Atlanta, GA, August 5-9, 2001.
- [18] Ganter, B., & R. Wille. (1999). *Formal Concept Analysis*. Springer.
- [19] Gibson, J., J. Orasanu, E. Villeda., & T.E. Nygren. (1997). Loss of Situation Awareness: Causes and consequences. In *Proceedings of the 8th International Symposium on Aviation Psychology*, Columbus, OH: Ohio State University, 1417-1421.
- [20] Hartel, C.E., K. Smith, & C. Prince. (1991). Defining Aircrew Coordination: Searching Mishaps for Meaning. In *Proceedings of the Sixth International Symposium on Aviation Psychology*. Columbus, OH: Department of Aviation, The Ohio State University.
- [21] Heinrich, H. (1959). *Industrial Accident Prevention: AQ Scientific Approach* (4th ed.). New York: McGraw-Hill.
- [22] Lecomte, P., J.C. Wanner & N. Wanner. (1992). Sécurité Aérienne et Erreurs Humaines (Aviation safety and human errors). *Aéronautique et Astronautique*, 2 (153), 72-76.

- [23] Lecomte, P., J.C. Wanner and N. Wanner. (2002). Late Runway Changes (unpublished informal communication)
- [24] Maille, N. (2002). *Contribution to the "Scenario" Experiment: An Analysis of 44 ASRS Incidents*. ONERA Report TR 4/06753.01F DCSD.
- [25] Maille, N., I.C. Statler, & L. Chaudron. (2005). An Application of FCA to the Analysis of Aeronautical Incidents. In *Proceedings of the Third International Conference on Formal Concept Analysis (ICFCA 2005)* B. Ganter & R. Godin (Eds.), Heidelberg, Germany: Springer-Verlag GmbH.
- [26] McGreevy, M.W. & I.C. Statler. (1998). *Rating the Relevance of QUORUM-selected ASRS Incident Narratives to a "Controlled Flight Into Terrain" Accident*. NASA TM-1998-208749. Moffett Field, California: Ames Research Center.
- [27] McGreevy, M. (2005). Approaching Experiential Discourse Iconicity from the Field. *Text*, 25 (1), pp. 67-105.
- [28] Murayama, Y., & Y. Yamazaki. (2002). Incident Investigation Method for Cooperative Safety Management. In *Proceedings of Workshop on the Investigation and Reporting of Accidents (IRIA 2002)* C.W. Johnson (ed.), University of Glasgow, Scotland, 107-114.
- [29] O'Leary, M., C. Macrae, & N. Pidgeon. (2002). Safety Data Collection In British Airways Flight Operations. In *Proceedings of Workshop on the Investigation and Reporting of Accidents (IRIA 2002)*, C.W. Johnson (Ed.), University of Glasgow, Scotland, 89-98.
- [30] Pearl, J. (1997). The New Challenge: *From a Century of Statistics to an Age of Causation*. *Computing Science and Statistics*, 29 (2), 415-423.
- [31] Phimister, J.R., V. Bier, & H.C. Kunreuther. (Eds.). (2003). *Accident Precursors: Averting Accidents with Foresight*. Washington, DC: National Academy Press.
- [32] Reynard, W.D., C.E. Billings, E.S. Cheaney, & R. Hardy. (1986). *The Development of the NASA Aviation Safety Reporting System*, NASA Reference Publication 1114, Moffett Field, CA.
- [33] Shively, R.J., M. Brickner, & J. Silbiger. (1997). A Computational Model of Situational Awareness Instantiated in MIDAS. In *Proceedings of the 9th International Symposium on Aviation Psychology*, Columbus, OH: Department of Aviation, The Ohio State University.
- [34] Sohn, Y. W., & S.M. Doane. (2000). Predicting Individual Differences in Situation Awareness: The Role of Working Memory Capacity and Memory Skill. In *Proceedings of the First Human Performance Situation Awareness and Automation Conference*, Savannah, GA, 293-298.
- [35] Statler, I. C., R. Morrison, & L. Rosenthal. (2003). Beyond Error Reporting Toward Risk Assessment. In *Proceedings of the 12th International Symposium on Aviation Psychology*, Dayton, Ohio.
- [36] Woods, D.D., L.J. Johannesen, R.I. Cook, & N.B. Sarter. (1994) *Behind Human Error: Cognitive Systems, Computers, and Hindsight*. CSERIAC SOAR 94-01, Wright-Patterson Air Force Base, OH: Information Analysis Center.

Appendix A: Current Tools

Several commercially available tools have been evaluated in queries of the ASRS database:

BRIO: Enables the performance of a Boolean search (SQL-like) on the relational database containing the codified part of the incident. Moreover, it enables a search for words in the free-text section. This tool is efficient and widely used for retrospective searches. The user must know how to formulate a “good” question in order to use BRIO effectively.

PERILOG: Perilog is a set of methods and software for data mining of text and other sequences of symbols. Perilog measures the degree of contextual association of large numbers of word pairs in narratives and other text to produce models that capture the contextual structure of the text. It compares models to measure their degree of similarity. The Perilog tool is primarily dedicated to retrospective searches, rather than analyses.

Vivísimo Clustering Engine™: interfaces with any document database to automatically organize search or database query results into hierarchical folders of categories that are selected from the words and phrases contained in the search results themselves. In a small experiment on a subset of ASRS reports, Vivísimo was found to be easy to run and was able to identify operationally pertinent concepts and exemplars. However, it was more effective when used on categorical fields than on free text, and the preprocessing of vocabulary was an important enabling step.

Battelle PNWD methodology: A new set of tools has been developed in order to mine the textual databases and build similar clusters without knowing what they are looking for. This methodology uses domain knowledge to standardize the language of the free text for processing (an automated filtering process called Phase identification, Leave it unchanged, Augment it with another term, Delete it, Substitute a different item (PLADS)), statistical tools to identify clusters and super clusters (Matlab), and a software dedicated to navigating the hierarchical structure (called Automatic Language Analysis Navigator (ALAN)). ALAN is a text comprehension tool that clusters textual data. ALAN identifies aviation safety reports that have similar topics, or identifies clusters of reports that are similar to a given exemplar. [Willse, et al (2002)]

The heart of the ALAN methodology relies on the extraction of a signature for each report. The signature and the definition of the similarity between two signatures are based on word counting in the free text. Results of clustering are often difficult to understand from an operational perspective, they do not provide automated identification of precursors, and they cannot be used to build an intervention strategy for a critical situation. Research is currently being conducted to make better use of domain knowledge to improve the efficiency and the operational relevance of the clustering tools.

References

Willse, A.R., S.K. Cooley, A.R. Chappell; D.S. Daly, & T.A. Ferryman. (2002). *Analysis of Rotary-wing Aircraft Incident and Accident Reports. PNWD-3070*, Battelle Pacific Northwest National Laboratory: Richland, WA.

Appendix B: The Cinq-Demi Methodology

During the 1980s, a French organization called Cinq-Demi developed a tool for analyzing conditions and the operational system faults underlying incidents or accidents. [Lecomte et al (1992), Wanner (1999)]¹⁴ This methodology has been used successfully to analyze accidents in a variety of domains, and on selected accident-inducing events reproduced in a flight simulator. In 1992, personnel of NASA-FAA's Aviation Safety Reporting System (ASRS) Office became interested in evaluating the potential application of this method to the ASRS database to aid identification of aviation system deficiencies. Representatives of the ASRS initiated discussions with ONERA and with Cinq-Demi about collaborating on an evaluation of the methodology.

In 1995, NASA and ONERA agreed to a new task titled "Human Factors in Aeronautical Operations and Incidents" under the existing ONERA-NASA Memorandum of Agreement (MOA) for collaborative research in aeronautics. The intent of this task was to evaluate the applicability of the Cinq-Demi methodology to the ASRS incident database. Consequently, the Cinq-Demi method was tested and was found to agree closely with the opinion of ASRS analysts in identifying incident causal factors in a sample set of about 300 ASRS reports.

The underlying concept of the Cinq-Demi methodology is best understood from the perception of aviation safety depicted in Figure B-1. The status space of Figure B-1 is an N-dimensional space representing all the parameters that define the state of the system. The "Status Point" defines the state of the world from the perspective of the aircraft. The operational objective is to maintain the Status Point within the "Authorized Flight Envelope" where the probability of an accident is very low (say, 10^{-7}). Outside the Authorized Flight Envelope is the "Peripheral Envelope" where the probability of an accident is somewhat higher (say, 10^{-3}). A trespass into the Peripheral Envelope is an *incident*. In such cases, the task of the operator is to bring the aircraft back from the Peripheral Envelope to the Authorized Envelope. When the trespass exceeds the Peripheral Envelope, the consequence is a *highly probable accident*.

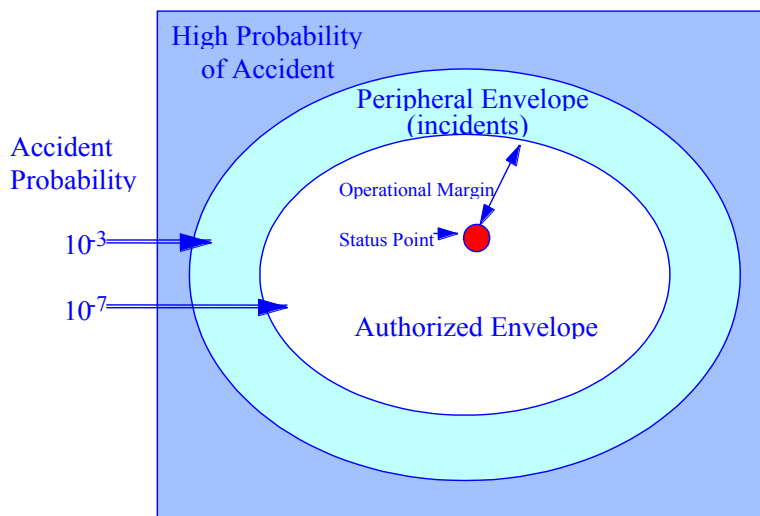


Figure B-1. A View on Accident Prevention

¹⁴ There are substantial similarities between the Cinq-Demi methodology and the Human Factors Analysis and Classification System (HFACS) [Shappell & Wiegmann (1997), Wiegmann & Shappell (2001)] that has become well known in the US.

There are only three types of activities that can influence the movement of the Status Point, and these are represented in the first three grids of Cinq-Demi’s structured methodology for analysis. One such type of activity is associated with “Maneuverability,” represented in a Cinq-Demi coding grid called the “Grid of Aircraft Maneuver Events (GAME)” (Figure B-2). The GAME grid lists the maneuvers that are either imposed by the mission, or required for correction of the Status Point to accommodate environmental events.

MANEUVERABILITY	
Maneuvers imposed by the mission	
Speed or Mach Number changes	Mmm
Flight path angle changes (particularly flare)	Mmp
Heading changes (turn entry, turn, turn exit)	Mmc
Altitudes changes (climb or descent entry, climb or descent, level off)	Mmh
Configuration changes (Landing gear, flaps, airbrakes, systems on/off)	Mms
Correction maneuvers	
Speed or Mach Number correction	Mcm
Angle of attack or Longitudinal Attitude correction	Mci
Sideslip angle correction	Mcd
Lateral Attitude correction	Mca
Heading correction	Mcc
Altitude correction	Mch

Figure B-2. Grid of Aircraft Maneuver Events (GAME)

The second type of activity is “Sensitivity to Disturbances,” represented by the “Grid of Aircraft Sensitivity to Perturbations (GASP).” (See Figure B-3) The GASP lists perturbation events due to internal disturbances (such as a system failure), or external disturbances (such as turbulence or a sudden change of runway status) that result in movement of the Status Point.

SENSITIVITY TO PERTURBATIONS	
External Disturbances	
Gust	Sraf
Wind Gradient	Sgrv
Turbulence	Stur
Thunderbolt	Sfdr
Icing	Sgiv
Hail	Sgrl
Runway (Rapid change of status : holes, patches of snow...)	Spst
Bird	Soix
Internal Disturbances	
System Failure	Span
Fire	Sfeu
Cabin pressure loss	Sprs
Disturbance due to passenger	Spax

Figure B-3. Grid of Aircraft Sensitivity to Perturbations (GASP)

The third type of activity is “Pilotability,” represented by the “Grid of Operator Failures (GOOF).” (See Figure B-4) In performing a task, an operator can miss or badly execute an elementary operation. GOOF identifies the “Elementary Operations” and the “Error Factors,” i.e. the conditions leading to that error. The Elementary Operations are Data Collection, Data Treatment and Decision, Data Transmission, and Action. There are five Error Factors: High Workload, Lack of Informational Cues, Misrepresentation due to wrong use of information and cues, Misrepresentation due to “diabolic” error, and Clumsiness.

GOOF	ELEMENTARY OPERATIONS			
ERROR FACTORS	Data Collection Machine⇒Man <i>or</i> Man⇒Man *s	Decision after Data Treatment (Diagnostic) *d	Data Transmission Man⇒Machine <i>or</i> Man⇒Man *t	Action *a
High Workload C*	Saturation : Data not collected or wrongly captured. Cs	Null, partial or wrong data treatment (diagnostic) leading to a bad decision. Too fast or too late decision. Cd	Saturation : Transmission inexistent, incomplete <i>or</i> wrong. Ct	Saturation : No action or erroneous action on a control. Ca
Lack of cues (Under vigilance, very low workload) A*	Lack of vigilance : Data not collected or wrongly captured. As	Null, partial or wrong data treatment (diagnostic) leading to a bad decision. Too late decision. Ad	Lack of vigilance : Transmission inexistent, incomplete or wrong. At	Lack of vigilance : No action or erroneous action on a control. Aa
Misrepresentation (Model error, Wrong use of Data) M*	Use of a wrong data collection model (localization, identification or transposition model). Ms	Use of a wrong working or risk model : false, oversimplified or too complex. Md	Use of a wrong transmission model (localization, identification, way of action, addressee). Mt	Use of a wrong controls model (localization, identification, way of action, status...) Ma
Misrepresentation (A priori model "diabolic" error) P*	Data collection limited to those which corroborate the a priori model. Ps	Changes of situation denied or forgotten. No risk awareness. Pd	Change of transmission status denied or forgotten. Pt	Action based on the a priori model. Pa
Clumsiness L*	Wrong data collection by visual or auditory lapse. Ls	Misunderstanding during data treatment. Ld	Wrong transmission by slip of the tongue. Lt	Erroneous action due to an incorrect motion of a hand, a foot, a finger... La

Figure B-4. Grid of Operator Failures (GOOF)

To describe an incident or an accident using the Cinq-Demi process, the analyst of a reported incident must first list, in chronological order, the sequence of sub-events as reported and then,

for each sub-event, identify and code the three types of reported activities that can move the Status Point, by making the appropriate selections from the GAME, GASP, and GOOF grids.

Cinq-Demi points out that other factors related to the operator’s physical and psychosociological behavior can be conducive to human error, but these cannot be resolved through operational or technical solutions. Factors such as these must be taken into account only to estimate the probability of occurrence of the same situation. They are accounted for in the fourth grid called the “Grid of Amplifiers of Risk of Errors (GARE).” (See Figure B-5) The GARE grid is used to identify the human environment at the time of the incident. It includes physical factors, physiological factors, psychological factors, and sociological factors.

GARE – Grid of Amplifiers of Risk of Errors			
Physical Factors Pk	External Factors Pke	Reduced Comfort	- Seats, abnormal body position ...
		Embarrassing working suit	- Safety suit, gloves, boots, spectacles, mask, earphones,...
		Work station motion	- Vibrations, shakes, low frequency oscillations (air sickness), work under load factor...
		Environment	- Temperature (High or Low), cabin pressure, humidity, lighting (too low or too high), noise, smell...
	Time at incident occurrence	- Mission beginning or end, just back from holiday or just before holiday, during holiday, schedule changes...	
	Internal Factors Pki	Medicines Alcohol Drugs	
Physiological Factors Pg		Fatigue	
		Needs	- Hunger, thirst, natural needs...
		Pathological status	- Sickness, flu, aches (head, teeth, ears...), itching, incapacitation (faint, death)
Psychological Factors Ps		Fear, Anguish Personal troubles Family troubles, Memory loss, madness...	
Sociological Factors S	Internal Factors Si	Crew or team structure Crew members qualification Occasional manpower shortage Learner, beginner... Team internal dispute...	
		External Factors Se	Bad social environment (strike...) Visitor, Instructor, Inspector VIP... on board

Figure B-5. Grid of Amplifiers of Risk of Errors (GARE)

The matrix of Operational System Faults and Elementary Operations constitutes the fifth and final coding grid that is called the “Rapid Analysis Fault Table (RAFT).” (See Figure B-6)

Cinq-Demi presumes that the error factors identified in the GOOF grid have their roots in systemic faults. The RAFT grid is meant to help to analyze these system faults of an incident, and to categorize them relative to the following concepts:

- Organization (crew roles, responsibilities, tasks, and procedures)
- Design (basic design concept rather than interface),
- Design Interface-Mechanical ergonomic (interface design for operation)
- Design Interface-Mental ergonomic (interface design and interpretation),
- Education-Training Basic
- Education-Training Specific (systems, model, and proficiency)
- Documentation (physical faults)
- Documentation (wrong content)
- Requirements (company, regulatory, and equipment manufacturer).

Within the computerized version of the grids for GOOF and RAFT, there are illustrative examples and definitions available at each “cell” within these matrices (accessible by a double click of the mouse on the cell) to aid the analyst in deciding on the appropriate categorization for an event.

RAFT		ELEMENTARY OPERATIONS			
OPERATIONAL SYSTEM FAULT		Data Collection Machine⇒Man <i>or</i> Man⇒Man *s	Data Treatment (Diagnostic) Decision *d	Data Transmission *t	Action *a
ORGANISATION O**	ORGANISATION Who has to do ? Responsibility	Or			
	ORGANISATION What to do ? Carrying out	Oe			
	ORGANISATION With what to do ? Means	Om			
	ORGANISATION How to do ? Drills Op*	Ops	Opd	Opt	Opa
INTERFACES H**	INTERFACES Mechanical ergonomy Hm*	Hms	Hmd	Hmt	Hma
	INTERFACES "Mental" ergonomic Hc*	Hcs	Hcd	Hct	Hca
EDUCATION F**	EDUCATION- TRAINING Basic education Fb	Fb			
	EDUCATION- TRAINING Specific educ. Fs*	Fss	Fsd	Fst	Fsa
DOCUMENTATION D**	DOCUMENTATION Physical faults Dm	Dm			
	DOCUMENTATION Wrong content Dc*	Dcs	Dcd	Dct	Dca
	REQUIREMENTS R*	Rs	Rd	Rt	Ra

Figure B-6. Rapid Analysis Fault Table (RAFT)

References

- Lecomte, P., J.C. Wanner & N. Wanner. (1992). Sécurité Aérienne et Erreurs Humaines (Aviation safety and human errors). *Aéronautique et Astronautique*, 2 (153), 72-76.
- Shappell, S.A. & D.A. Wiegmann. (1997). A Human Error Approach to Accident Investigation: The Taxonomy of Unsafe Operations. *The International Journal of Aviation Psychology* 7:269-91.

Wanner, J.C. (1999). Methodes d'Analyse des Incidents Aériens (Methods for analyzing aviation incidents). In *Proceedings of ANAE Forum 8 on "Relation Homme-Machine dans l'Aéronautique"*, January, 1999, Toulouse, 17-22.

Wiegmann, D.A. & S.A. Shappell. (2001). Human Error Analysis of Commercial Aviation Accidents: Application of the Human Factors Analysis and Classification System (HFACS). In *Aviation, Space, and Environmental Medicine*, Vol. 72, No. 11.

Appendix C: Taxonomic Structure for Codification

In the example presented in Section 3.2 (see Figure 2), states and events were described in an informal way by sentences or words extracted from the narratives of incident reports. The particular set of parameters that describe each state of the world together with the particular set of parameters that describe each transition will give us a more formal description of each part of the Scenario of an incident.

A wide range of taxonomic structures¹⁵ is used in the various accident / incident databases. These structures often contain parts related to the description of the flight circumstances, and others that relate to the human factors of an event. As an example, O’Leary et al (2002) gives a flavor of the type of parameters used in the British Airways Safety Information System (BASIS) while Murayama and Yamazaki (2002) show some of the Performance Shaping Factors used in a marine incident reporting system. The basis of our study relies on a consolidation of the three taxonomic structures that underlie three codifications¹⁶ that were designed specifically for use with ASRS reports:

- The ASRS codification is a structured set of ‘descriptors’ that is currently used to describe the incident and store it in the database. The codification is designed for use by operational personnel. It is limited, primarily, by the size of the current paper-form for reporting that the ASRS Office uses for the sake of maintaining confidentiality. After 28 years of operation, well over 100,000 ASRS incident reports have been codified with this taxonomic structure and are available in the ASRS database.
- The X-Form is another template that has been designed for the codification of ASRS reports. It contains additional descriptors that are intended to address human-factors issues that had not been considered in the design of the original ASRS codification, but have since become of high interest. The X-Form has never been implemented for routine operation in the ASRS.
- The Cinq-Demi methodology (described in Appendix B) was developed during the 1980s as a tool for analyzing aeronautical-incident reports from a human-factors point of view. This methodology focuses on identifying conditions that have a high probability of leading to human errors. In 1997, a codification form was designed, built upon the ASRS codification, but with additional fields to make the codification more compatible for efficient search and analysis using the Cinq-Demi methodology. Small sets of ASRS reports have been codified using this tool and are available.

As highlighted in Wiegmann and von Thaden (2003) most incident reports are highly informative about what happened, but give much less definitive information about why an incident happened. In a first-level filtering of an analysis process, we need to be able to cluster incident reports reliably on the basis of similarities of what happened. Our assumption is that this step can be achieved by the use of the taxonomic structure.

Therefore, our first objective was to identify all the possible terms of the taxonomy and their structure for the incident reports in our world of aviation. Each term will map to a parameter in the description of our world in the incident model (described in Section 3). Moreover, for every parameter used, we can state whether the concept captured is objective or not. We will

¹⁵ By taxonomic structure we mean a set of structured terms that describes some domain or topic as in Swartout et al (1997). The idea is that a taxonomic structure provides a skeletal structure for a knowledge base.

¹⁶ Codification refers specifically to the attributes and their values that constitute the fixed fields of the reporting form.

call a concept *objective* if it can be defined on the basis of *observable, measurable* data. All the concepts that are not objective are called *subjective*.

Our hypothesis is that a “full and complete” set of *objective* parameters adequately describes the *what* and could be incorporated into the fixed fields of a well-designed computerized reporting form for electronic submission. Then, the first step of the clustering process (on similarities of the *what*) could be totally automated. The understanding of the *why* will rely on *subjective* parameters and on exploitation of the free text.

In Appendix D, we will discuss the merger of all the parameters identified in the three codifications, and we will assume that the result constitutes a “full and complete” set of parameters for the description of any and all aviation incidents in our world. However, as these three codification schemes entail structured sets of descriptors, we will, in this appendix, first compare these codifications at the highest levels of their structures.

C-1 High Level Structure of the Three Codifications

In this section, we are going to study separately the taxonomic structures of the three codification forms for the ASRS reports. We have found that we can classify the type of information contained in the main sections of the three forms into the following five categories as the highest level of their structures:

1. **“Time and Setting”**: We group in this category all the information related to the frame of the story (when, where...) and to the fixed entities (facilities, equipment...).
2. **“Cast of entities”**: This category contains information on the persons and all the entities that evolve and take action in order to create the story.
3. **“Anomaly”**: This pertains to all the information that explains why the “anomalous state” is anomalous.
4. **“Transitions”**: This is all the information that characterizes a transition in the State/Transition model.
5. **“Other”**: This includes any information that cannot be classified in any of the other four categories.

The primary purpose of these five categories is to enable us better understand the main similarities and differences among the three codifications in their structures and their relations to the State/Transition model. Some sections of a codification form may address several categories and then we will go one step down into the knowledge structure to understand their differences.

For each codification form, we are also going to highlight the codified links between the main sections of their structures. Our focus in this study on the high-level structure and linkages will, of course, not reveal the relations between pieces of information at lower levels in the taxonomic structure.

C-1.1 ASRS Codification

The ASRS fields are organized into the following nine main sections:

1. **Time**: The time section gives the date, the day, and the local time of day for incident occurrence. The local time is given only as a six-hour time interval, and we can assume for almost all incidents that the entire story occurs during this interval of time. This section of the ASRS codification is part of our “Time and Setting” category.

2. **Place**: The place section contains 4 subsections (Locale reference, State Reference, Relative Position, and Altitude). We can assume that the entire story is linked to the same State Reference and Local Reference. However, the Relative Position and the Altitude subsections describe a very precise point of the space, and that point is identified with the anomalous state reached during the story. This section is in the “Time and Setting” category.
3. **Environment**: This section describes the weather, light, visibility, ceiling, and runway visual range (RVR) and falls in the “Time and Setting” category. In the spirit of the ASRS codification, the environment section relates to the weather conditions that are generally presumed not to change during the course of events of the reported incident. Nevertheless, some incident reports describe a rapid deterioration of the weather conditions, and in such cases these parameters could vary.
4. **Aircraft**: Aircraft are, of course, central elements in an aviation incident. Their descriptive parameters evolve with time, and the incident report often describes their different states. We point out that their description in the ASRS codification contains fields that are not intrinsic characteristics of the aircraft but are linked with other “elements” of the story (for example: Controlling Facilities, Coordinating Facilities...). These elements will be studied in section C-2. For the most part, an aircraft is considered as an entity in the ASRS codification, and, therefore, this section falls within the “Cast of entities” category.
5. **Component**: A component is one part of an aircraft. The link between the component and the aircraft is well codified in the ASRS form. The ASRS form puts the component in a separate section for historical reasons. For the purpose of this discussion, we consider the component as a part of the related aircraft entity. This section falls into the “Cast of entities” category.
6. **Person**: People are the other essential entities of the story. This section also falls in the “Cast of entities” category. Some of the subsections of the ASRS form are used to link the described person to other entities (e.g., aircraft).
7. **Events**: The event section describes several things, including the anomalous state(s) encountered in the story and the following actions that resulted in recovery to a safe state. Consequently, some of the subsections of the ASRS “Events” are in the “Anomaly” category, others are in the “Transitions” category, while some belong to the “Other” category
8. **Maintenance Factors**: The maintenance factors section is dedicated to incidents occurring during maintenance operations. It is not within the scope of this study and this section is omitted from further consideration.
9. **Assessments**: The assessment section is mainly an expert’s judgment about the main factors that caused this world to reach the anomalous state. It emphasizes some parts of the other fields used to describe the story (e.g., an aircraft, a person, an environment factor...). It is a judgment about the importance of some particular part of the description and so falls in the fifth category for purposes of this discussion.

Figure C-1 shows the contributions of these sections of the ASRS codification form to the categories of the information matrix and to the descriptions of the components of the Incident Model.

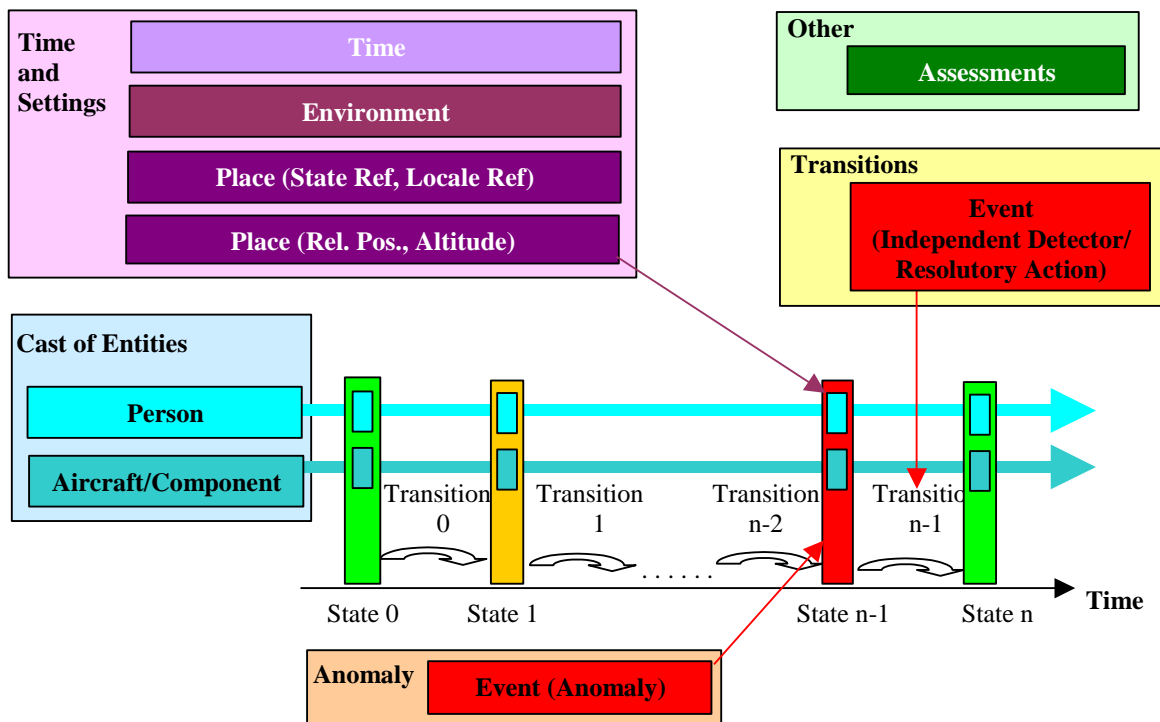


Figure C-1 - The categories of information, the sections of the ASRS form, and the Incident Model

As already mentioned, some links between parts of knowledge are explicitly codified in the ASRS form. Others are only implicit. Figure C-2 shows the links that are both explicit and completely defined in the ASRS form.




Figure C-2 - Explicit links in the ASRS Form

Other more or less implicit links also exist in the ASRS database. We can point out three types of such links:

- Links between parameters describing the anomaly and one or several entities in order to describe an anomalous state (for example an anomalous state described by “Ground Incursion” should be linked to an aircraft). These links are often implicit.
- Links between an event and one or several entities. For example the Resolatory Action “Diverted to Alternate” is associated with the Flight Crew in the ASRS codification (because “Diverted to Alternate” is an entry in the “Flight Crew” subsection). Nevertheless the link between the event and the entity is only partly explicit as the story might contain several Flight Crews.
- Links between entities and other entities that are “not well defined”. For example the sub-section, “Controlling Facilities,” links the aircraft with something (tower,

TRACON...) that is not clearly codified in the ASRS form (there are no descriptors for the tower, TRACON...).

C-1.2 The X-Form

The X-Form is another template that has been developed for the codification of ASRS reports. It was designed to overcome some of the shortcomings of the ASRS form that had been identified after several years of use. The X-Form has never been implemented at ASRS. The definition of the required or possible links between the main sections, and how these links are codified, is not always clear.

The X-Form is organized into the following 18 sections:

1. **Record Control:** This groups information that enables good management of the database (accession number, type of codification...). This section is not directly related to the description of the story and falls in the “Other” category.
2. **Time:** “Time and Settings” category.
3. **Place:** This is similar to the Place section in the ASRS Form. It is a part of the “Time and Setting” category. It contains both a general description of the location and a precise description of the place of the anomalous state.
4. **Environment:** This section describes the weather, visibility, terrain... and is part of the “Time and Settings” category.
5. **Traffic:** This describes the overall air/ground traffic at the time of the story. It is part of the “Time and Settings” category.
6. **Airspace:** This describes the Airspace involved in the story. Therefore, at least one aircraft should be linked to each airspace that is involved, and each aircraft involved should be linked to at least one airspace. The notion of Airspace is similar to the notion of Place (it is a division of the space) and falls in the “Time and Settings” category.
7. **Facility-Arpt:** An airport is a fixed entity (as is the “Ground” in the Cinq-Demi codification) and so is part of the “Time and Setting” category.
8. **Facility-NAVAID:** As for the airport, it is a fixed entity and a part of the “Time and Setting” category.
9. **Facility-ATC:** As for the airport and the NAVAID, it is a fixed entity and a part of the “Time and settings” category.
10. **Aircraft:** Falls in the “Cast of Entities” category. It contains both static and dynamic parameters.
11. **Person:** The person section falls in the “Cast of Entities” category, but the HUMPERF (Human Performance) subsection of Person describes actions made by the person. So the HUMPERF subsection is part of the “Transitions” category.
12. **Info-Probs:** This section describes events linked to a communication problem. This specific type of event has been added in the X-Form as it seems to entail crucial steps leading to an anomalous state. These events are always linked to, at least, one person. It falls in the “Transitions” category.
13. **Conflict:** This section describes the anomalous state and so is part of the “Anomaly” category.

14. **Adverse Interaction:** This section contains three parts: Interpersonal, Proximity and Coordination. The second one, Proximity, characterizes the proximity of the airspace to an airport and can be considered as part of the “Time and Settings” category. The two other parts describe adverse interactions between persons or a coordination failure. They are more related to the description of the sequence of events, and are classified in the “Other” category.
15. **Event Flow:** This section describes both the anomalous state (“Anomaly” category) and the following events (“Transition” category).
16. **Situation:** This section is codified only for reports related to a recurrent event or to a situation (the “same” situation has already been encountered several times in the last months). Its aim is to identify a “latent fault” in the system (policy, procedure...) and is a little like some elements of the RAFT in the Cinq-Demi codification. It falls in the “Other” category.
17. **ATC:** This section contains two parts. The first one, ATC-HANDLING, describes actions taken by the ATC and is part of the “Transition” category. The other one, AIR TRAFFIC INCIDENT, mixes anomalous state descriptions (e.g., NMAC) and judgments about the role of the persons (PLT-DEV, INTERCOORD...). We are going to put this second subsection in the “Other” category (partly because, in the ASRS form, the Air Traffic Incident subsection was in the ASSESSMENTS section.).
18. **General Assessment:** This is a judgment about the importance of some factors already codified and so falls in the “Other” category.

Figure C-3 shows the relationships of the sections of the X-Form to the categories of information and to the descriptions of the Incident Model.

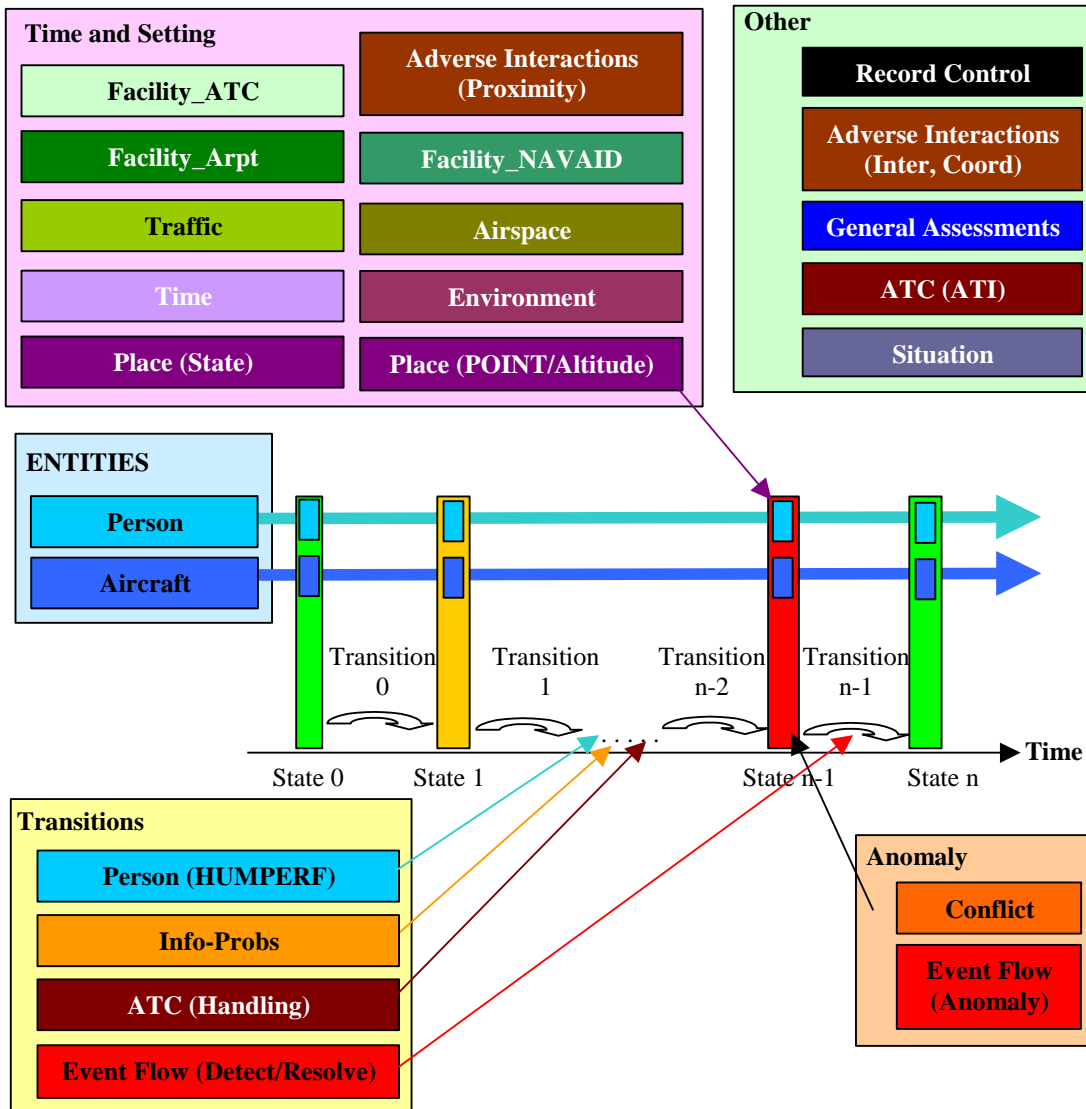


Figure C-3 - The categories of information, the X-Form sections, and the Incident Model

Even if the links between the sections of the X-Form are not always clearly codified, we should have at least the ones shown by Figure C-4.

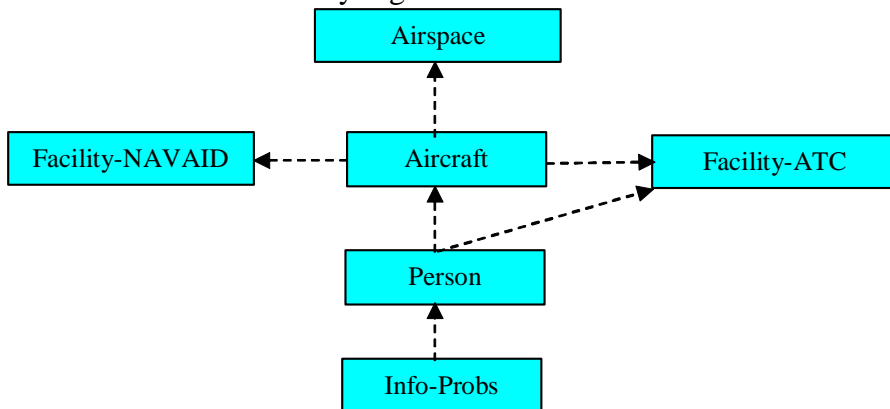


Figure C-4 - The links between the sections of the X-form

There are other links included in the codification as, for instance, between the Info-Probs section and other sections; this is because a communication problem can entail an equipment problem. We will discuss later how to represent the elements of the “Transition” category in order to retain all the necessary links.

C-1.3 Cinq-Demi Codification

A description of the Cinq-Demi methodology is presented in Appendix B, and the structure of the Cinq-Demi codification designed for use on ASRS reports has already been extensively reviewed in previous studies. [Maille (2001a) & (2001b)] The Cinq-Demi codification contains mainly three sorts of information: the description of the frame of the story (“Time and Settings” category), the description of the entities (“Cast of entities” category) and the descriptions of events related to the persons (“Transitions” category). The Cinq-Demi codification primarily relies on two types of entities: aircraft and person. Their possible links are well identified and formalized. The “Ground” environment is highlighted in the Cinq-Demi formal codification and some equipment problems can be linked to it. The “Ground” refers to the airport facilities and equipment and so we consider it to be part of the “Time and Setting” category.

Cinq-Demi’s field called “Theme” is sometimes an “Anomaly” description and sometimes a “Transition” description. The confusion over the meaning of this field was, in fact, the origin of the discussions that led to the scenario concept described in this report, and so it will not be considered further.

Figure C-5 shows the relationships of the sections of the Cinq-Demi codification to the categories of information and to the description of the Incident Model.

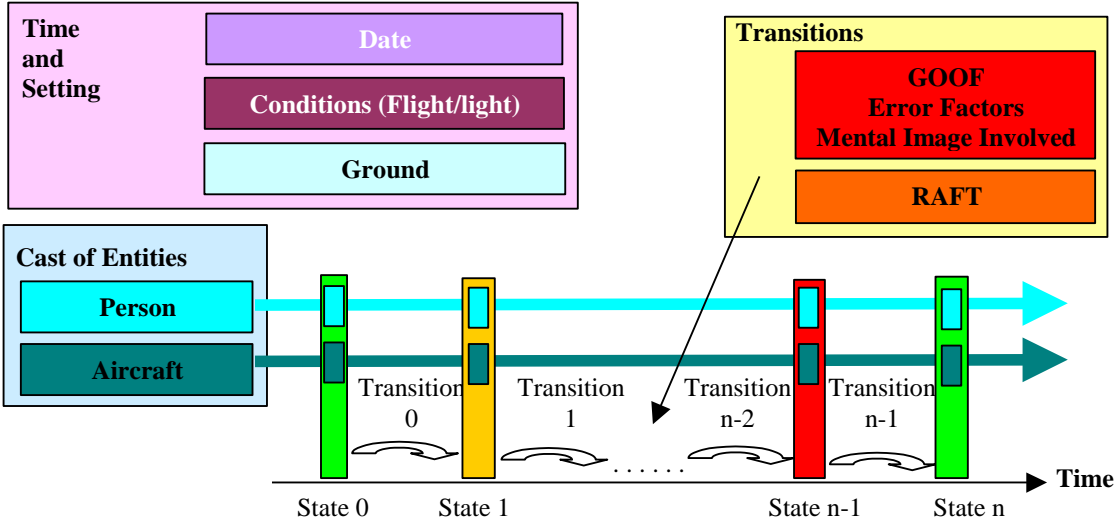


Figure C-5 - The categories of information, the sections of the Cinq-Demi codification, and the Incident Model

An important difference between the ASRS and the Cinq-Demi codifications is that the persons encoded are not exactly the same. The Cinq-Demi codification identifies only the categories of persons involved in an error rather than the individuals.

C-2 Comparison of the Three Structures

Each one of the three structures has some special characteristics, but their high-level organizations are quite similar. We must keep in mind that these forms are used to codify the report primarily for efficient retrospective search of the database and not as the sole basis of an in-depth analysis of the incident. That is why they include neither a precise description of the sequence of transitions, nor an accurate time reference of events or states. We are now going to describe the differences among the three forms for each category of information and we will define the taxonomic structure that seems to be the most relevant for purposes of our study. Our objective is to define a taxonomic structure that supports both efficient retrospective search and the in-depth analyses that is the subject of this report. The sections used in the ASRS codification are all included in the X-Form's sections. The Cinq-Demi codification introduces two new sections (GOOF and RAFT) for the description of the transitions.

- “Cast of entities”: The three codifications do not entail exactly the same entities, but all three refer to the notions of Person and Aircraft.
 - Person: The Cinq-Demi codification highlights only groups of persons that have made some error, and their codification is designed for understanding conditions that lead to human error. As the ASRS reports are primarily used for an operational analysis of incidents, it is certainly better to encode all the persons involved in the incident. Nevertheless, we will have to be sure that our codification allows us to identify which persons have made an error. (The links between the fields used to describe the error or the conditions leading to the error, and the person or team responsible for the error, must be clearly codified.)
 - Aircraft: The only difference among the three forms is that the ASRS codification has a separate section for the description of an aircraft component. We point out that the information related to the component is often more related to a description of an event (malfunctioning, failed, improperly operated...) than it is to a description of the aircraft. As we want to highlight the transitions (the *why* and the *how*), we propose to group such information with the other transitions (as in the Cinq-Demi grids where the Technical Failure (Span) is classified as one of the possible perturbations).
- “Time and Setting”: The most complete description is the one used in the X-Form. We are going to use the sections of the X-Form as a starting point for this category.
- “Transitions”: In our analysis of the three forms, we put the information related to the “Transitions” (at least the one involving a person) in a separate category, but in the templates that information can be:
 - incorporated in another section (for instance HUMPERF is a subsection of the PERSON section), or
 - in a specific section (e.g., INFO-PROB section).

Incorporating the transition information into another section enables us to relate it to the other information of that section. This is used to highlight two sorts of links:

- The link between the transition and the person responsible for that transition (for instance HUMPERF subsection). Thus the actor performing the action is unambiguously identified.

- The link between the transition and a specific state. (For instance the “Resolutive Event” subsection of the ASRS form is in the same section as the “Anomaly” and the “Independent Detector” subsections, highlighting their link).

Incorporating the transition information within a person description raises two problems:

- It does not allow a good codification of an event linked to several persons (such as communication problems)
- It does not allow an easy representation of the sequence between the events (even if we do not know yet whether we really want to codify such a sequence in a codification process) or an easy retrieval of how things happened.

As we assume that a “good” schemata that captures the essence of the story of the incident is that of the Scenario (i.e., Context + Behavior → Outcome), we propose to clearly separate in the taxonomic structure all the information related to the transitions and, therefore, to Behavior. The “Resolutive Action/Event” must be identified separately (as it is done in the X-Form and in the ASRS form) because it is not part of the “Behavior” of our Scenario. For our current study, the Outcome of the Scenario is an anomalous state and the Behavior of recovery to a safe state is not a part of this study. The Scenario that includes consideration of recovery from an anomalous to a safe state will be the subject of a subsequent study.

- “Anomaly”: This is described in a very similar way in the ASRS and in the X-Form. The two descriptions will be merged for our structure.
- “Other”: Having a separate section for record control seems to be a good idea. The other sections (e.g., Assessments, Situation) have to be consolidated depending on the aim of our codification.

The overall taxonomic structure of the knowledge and its links with the three parts of the Scenario are shown on Figure C-6.

C-3 A Full and Complete” Set of Parameters

In section C-2, we compared, at a high level, the taxonomic structures that underlie the three codification forms specifically designed for ASRS reports. We showed that the structure of the knowledge used in the ASRS codification is embodied in the one used by the X-Form. Therefore, we will use the X-Form structure on which to map all the parameters used in all three forms. Parameters that are addressed only in the Cinq-Demi form will be inserted at the most relevant place in that structure.

The set of all the parameters of this taxonomic structure is given in Appendix D.

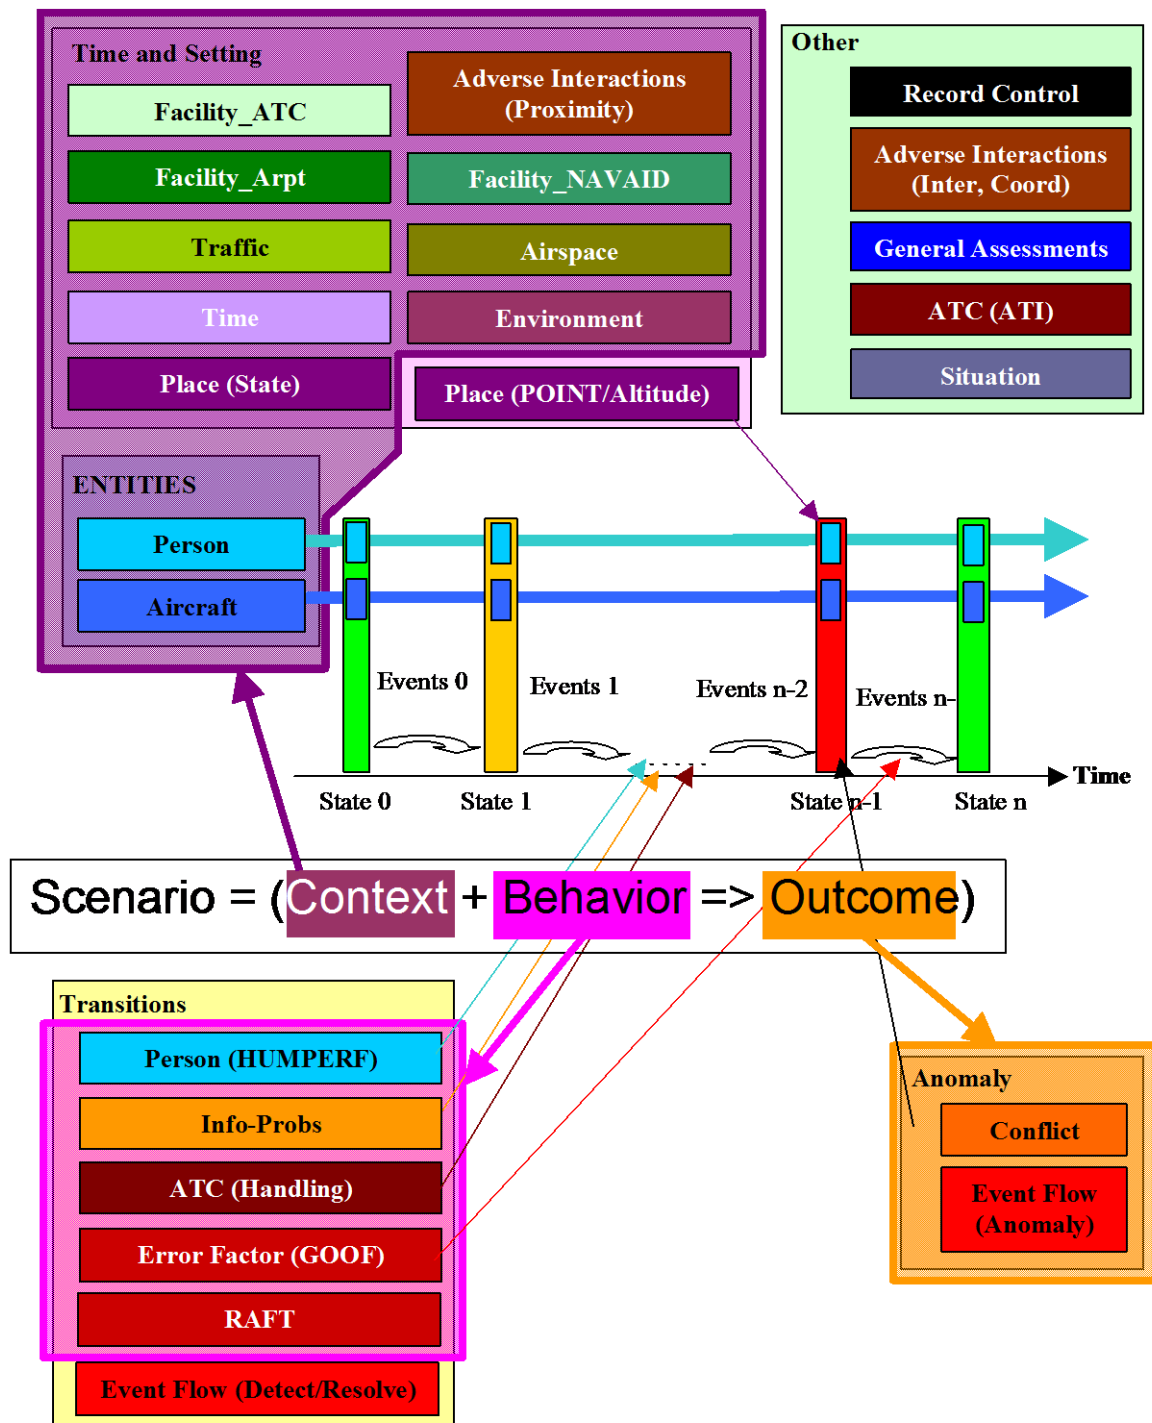


Figure C-6 - Main relations between the Scenario and the categories of information

References

- Maille, N. (2001a). *Vers Une Analyse Automatique des Données Extraites de la Bases ASRS*. ONERA Report RT 2/03447.01F DCSD (In French).
- Maille, N. (2001b). *Towards a More Automated Analysis*. ONERA Report TR 3/05662 DCSD.

Swartout, B., R. Patil, K. Knight, & T. Russ. (1997). Towards Distributed Use of Large-Scale Taxonomic structures. In *Proceedings of AAAI Spring Symposium Series on Ontological Engineering*. Stanford University, CA, 138-148.

Wiegmann, D.A., & T. von Thaden. (2003). Using Schematic Aids to Improve Recall in Incident Reporting: The Critical Event Reporting Tool (CERT). *International Journal of Aviation Psychology*, Volume 13, Number 2, 153-171.

Appendix D: Mapping Parameters to a “Full and Complete” Set

This appendix describes the process of formulating a “full and complete” set of parameters based on a consolidation of those that have been identified in (1) the current ASRS codification form, (2) the Cinq-Demi GRIDS, and (3) the “X-Form”. All of these parameters have been classified according to the five categories of information (Time and Setting, Entities, Anomaly, Transitions, and Other) and their sub-categories as shown in Figure 6. A separate table of parameters is built for each sub-category.

Moreover, this set of factors has been separated into the following two categories

1. Factors that are clearly and unarguably objective, categorical, and measurable (For simplicity, these will be called “objective” factors in this presentation.)
2. All the others (that, for the moment at least, we will simply label as “subjective”)

We need not seek “perfection” in this process of classifying parameters as objective or subjective. Certainly, there are factors that everyone would put in category 1 that could have an aspect of subjectivity (such as visibility, for example). Certainly, there will be differences of opinion on where to assign some factor, but we do not consider this degree of uncertainty to be very important to the result because the number of questionable factors constitutes only a small portion of the total number of parameters.

In each of the following tables, the titles of the tables should not to be confused with the fields. The fields (or the attributes) associated with each title are in yellow cells. The parametric values of these attributes are shown in white cells if they are objective parameters or in green cells if they are other than objective (called subjective) factors.

Time and Setting

<i>Time</i>
Date of Occurrence
Day of Occurrence
SUN
MON
TUE
WED
THU
FRI
SAT
Time of Occurrence
0001 to 0600
0601 to 1200
1201 to 1800
1801 to 2400

<i>Place</i>
State Ref.
Local Ref.
Facility
ID
Type
ARPT
VOR
VORTAC
NDB
TACAN
Intersection
Special Use Airspace
Relative Position
Distance
Radial
Angle
Altitude
MSL
AGL

Environment	
Flight Conditions	Lighting
VMC	Dawn
IMC	Daylight
Mixed	Dusk
Special VFR	Night
Marginal	Visibility in Statute Miles
Ceiling	Low Boundary (statute Miles)
CLR	Upper Boundary (Statute Miles)
Single Value (Feet)	Single Value (Statute Miles)
Lower Boundary (feet)	Runway Visual Range
Upper Boundary (feet)	Lower Boundary (feet)
WX-AVD	Upper Boundary (feet)
Weather Elements	Single Value (Feet)
Wind Fx	Terrain Fx
CLR-TURB	MTNS
WAKE	HILL
TURB	RISING
ALOFT	DITCH
SHEAR	TREE
HEAD	WIRE
TAIL	TOWER
CROSS	OTH-OBST
TSTORM	WATER
DN-DRAFT	GRADE
UP-DRAFT	CRANE
Obscur'n Fx	BRIDGE
SMOG	BUILDING
PRECIP	VEHICLE
DUST	OBS-LTG
CLOUDS	Other Fx
SUNPOS	BIRDS
UNDCAST	ANIMAL
OVERCAST	PED
HAZE	LTNG
OBSTRUC	LITE
FOG	SIGN
WDW	MARK
Precip'n Fx	ENGICE
RAIN	FRAMICE
TSTORM	FOB
DRIZZLE	SKYDIVER
SLEET	BARO-GRADIENT
SNOW	WXBAL
HAIL	RAPID-DETER
	JETBLAST

Facility Airport	
Involvement	
	SURF
	O&D
	COM
	PROB
Facility State	
Facility ID	
Facility Descriptors	
	PVT
	CTL
	UCTL
	CLOSED
	SATELLITE
	CONSTRUCTN-ACTIVITY
	RWYS-IN-USE-PAR
	RWYS-IN-USE-INTER
	RWYS-IN-USE-CVG
	RWYS-IN-USE-DVG
	RWY-CHG-IN-PROGRESS
	CRASH-ACTIVATED
	HELIPORT
	SEAPLANE
Problem Componenets & Services	
	RWY
	TXWY
	RAMP
	SURFACE
	WX-EQP
	COM-EQP
	COM-ENV
	INTXN-NAME
	DMEN
	SRVCS
	PROC-POL
	STAFF
	MGMT

Facility ATC	
Involvement	
	CTRL
	NBRQ
	COM
	PROB
Facility Type	
	TWR
	TRACON
	ARTCC
	MILFAC
	FSS
	CPNY-RDO
	CTAF
	UNICOM
Facility State	
Facility ID	
Facility Descriptors	
	DARC-ACTIVATED
	BUEC-ACTIVATED
	TRNG-IN-PROG
	CRASH-ACTIVATED
	CLOSED
	NON-RDR
	NON-FED
Problem Components & Services	
	RADAR
	COM-EQP
	COM-ENV
	OTH-EQP
	COMPUTER
	STRUCTURE
	SRVCS
	STAFF
	PROC-POL
	SCOPE
	MGMT

Traffic	
OPPDIR	UNKVFR
SAMEDIR	POPUP
SIDEBY	UNAUTH
CONVERG	PLTDEV
INTERSEC	FLTASSIST
PARALLEL	EMER
SAMEALT	SPC-EVENT
OVERTAKE	BOUNDARY
PERFDIFF	TFC-SEQ
CONGEST	CROSSING
FLYWAY	FORMATION
OVERFLT	FORM-BREAKUP
NORAC	FORM-JOINUP
NORDO	CLOSSURE-RATE

Airspace	
Involvement	Routes (cont'd)
OCCU	Arrival
SHUD	Profile Descent
ENT	Holding Pattern
EXIT	STAR
PROB	On Vectors
Airspace ID	VFR
Type	Approach
Class A	Circling
Class B	Contact
Class C	Instrument Precision
Class D	Instrument Non Precision
Class E	SVFR
Class G	Traffic Pattern
Special Use	Visual
Temporary Use	Charted Visual
SUA (Special Use Airspace)	Straight-In
PROHIB	Military
RESTR	Transit
REFUEL	OverWTR
WARN	IAPS
SR	ILS
ALERT	VOR
MOA	NDB
VR	MLS
IR	PARALLEL
OSUA	RNAV
DZ	SDF
ROUTES	TACAN
Departure	Design Problem
SID	MAP-PT
Noise Abatement	INTXN-NAME
Other Published IFR Departure	APCHES
On Vectors	DEPS
Enroute	CHARTING
Airway	XING-ALT
Direct	PROX
On Vectors	HMDG
Atlantic	
Pacific	
Other Oceanic	

Facility NAVAID
Involvement
NAV-ERR
COM
PROB
Facility Type
ILS
VOR
VORTAC
NDB
TACAN
BCSTN
LDIN
ROT-BEAC
MLS
LORAN
SATELLITE
OMEGA
OTH-VIS
Facility State
Facility ID
Problem Components & Services
ILS
COM-EQP
COM-ENV
LITE
SRVCS
STRUCTURE

Adverse Interactions
Proximity btwn terminals & airspc
Civil-Mil Arpt
Civil-Civil Arpt
Route-Terminal
Route-SUA
Bird Flyway-Terminal
Canadian Airspace
Mexican Airspace

Entities

Aircraft	
Make Model	Advanced Ckpt
Aircraft Type	DISPLAY
SMA	NAVCTL
SMT	NON
LTT	Operator Organization
MDT	Common Carrier
MLG	Air Carrier
LGT	Air Taxi
HVT	Charter
WDB	General Aviation
FGT	Corporate
BMB	Instructional
MLT	Personal
MTR	Other
SPC	Government
ULT	Military
SPN	RNT
BAL	Mission
HNG	Passengers
OTH	Freight
Crew Size	Training
1	Pleasure
2	Agriculture
3	Ambulance
4OM	Ferry
Airframe	Test Flight
wings	Tactical
WL	Refueling
WM	Traffic Watch
WH	Other
WB	Banner Tow
WO	Business
WR	Photo-Shoot
gear	Repositioning
LN	Skydiving
LR	EMS
LF	CBO
surf mod	CKD-RID
SL	FLT-CHK
SS	UTL
SA	PRB
SI	Flight Plan
engines	VFR
ER	IFR
ET	DVFR
EJ	SVFR
EN	COM
number Engines	NON

Aircraft (cont'd)

Flt Phase	Flt Phase (cont'd)
GND	ARR
PREFLT	DSCNT
PUSH-BK	APCH
POWER-BK	LNDG
TAXI	HLD-SHT
GND-HOLD	AIR-HOLD
HLD-SHT	MNTN
INTXN-XING	PATTERN
Parked	GAR
Maintenance	SHT-FLD
Holding	OFF-ARPT
Position and Hold	MAP-PT
Takeoff Roll	PARK
DEP	LOW
TKOF-POS	TAG
TKOF	INTXN-LNDG
ABORT	DN-WIND
INTXN-TKOF	SIDESTEP
ICLB	Intermediate Altitude
CLB	Vacating Altitude
DN-WIND	Roll
SHT-FLD	Missed Approach
OFF-ARPT	Operating Under FAR Part
MITO	Part 91
Intermediate Altitude	Part 119
Vacating Altitude	Part 121
CRS	Part 125
WX-AVD	Part 129
VECTOR	Part 135
DIV	Other Part
DIRECT	Maneuver
Level	Imposed by mission
Holding	Speed
Enroute Altitude Change	Angle
MNV	Heading
TURN	Altitude
180	Configuration
360	Correction
AUTO-ROT	Speed
LLL	Angle attack/longi.
LLH	Sideslip
TOW	Lateral Attitude
OTH	Heading
EMER	Altitude

Aircraft (cont'd)

Routes	Approach
Departure SID Noise Abatement Other Published IFR Departure On Vectors	CAT-I CAT-II CAT-III BC LDA MLS
Enroute Airway Direct On Vectors Atlantic Pacific Other Oceanic	PAR RNAV SDF TACAN OHD OPDIR
Arrival Profile Descent Holding Pattern STAR On Vectors VFR	INIT FINL SHT-FINL NON-RDR PRACTICE DN-WIND UP-WIND SIDESTEP
Approach Circling Contact Instrument Precision Instrument Non Precision SVFR Traffic Pattern Visual Charted Visual Straight-In	Cabin Activity
Military Transit OverWTR	Beverage Service Boarding Cart Service Deplaning Meal Service Movie Safety Related Duties Seated Tray Service Other (activity)
Navigation in Use	Cabin Lighting
ILS Localizer Only (RWY ID) Localizer & Glideslope (RWY ID)	Bright Medium Dark
VOR NDB FMS or FMC GPS INS Loran Pilotage DME	Available Seats
Descriptors	Pass. On Board
FGN-FLAG FORMATION ORDNANCE-ON-BOARD	Maintenance Status
	Required Documentation on board No Yes Released for Service No Yes Maintenance Deferred

Aircraft (cont'd)	
Problem Systems	ATA Code
Placard/Marking	Manufacturer
Servicing	Problem
Air Conditioning	Design Deficiency
Auto Flt	Failed
Communications	Improperly Operated
Electric Power	Malfunctioning
Eqp/Furnishings	Not installed
Fire Protection	Aircraft Problems
Flt Ctls	CKPT-NOISE
Fuel	MTNC-DISCREPANCY
Hydraulic Power	DECOMPRESSION
Ice/Rain Protect	FIRE
Indicating/Recording Sys	ACFT-PERF
Landing Gear	PREFLT-DEICING
Lighting	ENG-OUT-PERF
Navigation (+ FMS)	CONFIGN
Oxygen	FLEET-INCONSIST
Pneumatic	DESIGN
Vacum	CABIN-SPACE
Water/Waste	VIS-SIGNATURE
Electrical Panels & parts	INSPECTION
APU	CREW-COMPLEMENT
Doors	
Fuselage	
Nacelles/Pylons	
Stabilizers	
Windows	
Wings	
Propeller	
Rotor	
Pwe Plant	
Eng Fuel Ctl	
Ignition	
Air	
Eng Ctls	
Eng Ing/Warning	
Exhaust	
Oil	
Starting	
Turbines	
Water induction	

Person	
Person's involvement	Function at time of occurrence (cont'd)
Pilot Flying	Controller
Pilot Not Flying	Local, combined local
Monitoring	Local, combined local
Controlling	Ground , Combined Ground
Cabin Service	Ground , Combined Ground
Evaluating	Flight Data
Instructing	Clearance Delivery
Receiving Instruction	Departure
Maintenance	Approach
Observing	Radar
Other direct involvement	Combined radar
Affiliation	Non Radar
Government	Handoff Position
FAA	Traffic Management
Foreign	Flow
Military	Maintenance
Company	Inspector
Air Carrier	Technician
Air Taxi	Lead Technician
Charter	Flight Attendant
Corporate	On Duty
Other	Off Duty
Contracted Service	Extra
Instructional	MILFAC
Personal	PAR
CGA	RANGE
NGA	RSU
UGA	OTHER
Function at time of occurrence	FSS Specialist
Oversight	UNICOM operator
PIC	FBO Personnel
Supervisor	Vehicule driver
Coordinator	Dispatcher
Flight Attendant in Charge	Gate
Airport Manager	Ramp Guidance
Observation	CGP
Air Carrier Inspector	CENR
Company Check Pilot	Qualifications
Observer	Pilot
Passenger	Student
Instruction	Private
Instructor	Instruments
Trainee	Multi-Engine
Flight Crew	Commercial
Single Pilot	ATP
Captain	CFI
First Officer	Flight Engineer
Second Officer	Military
Relief Pilot	
Navigator	
Load Master	

Person (cont'd)

Qualifications (cont'd)	Factors Adversely Affecting Perf.
Controller Military Radar Non Radar Developmental SPI Technician Repairman Powerplant Airframe FCC Inspection Authority Flight Attendant Currently Qualified Trainee Aircraft Qualified on (number) Other FSS Specialist Dispatcher	Physical Factors External Factors Reduced Comfort Workspace Seats Abnormal body position Under hood Awkward Working Suit Safety suit Gloves Boots Earphones Work station motion Vibration, shakes Low freq. oscillations Load Factor Rate of Climb Rate of descent Environment Temperature Cabin pressure Humidity Lighting Background contrast Audio Interferences Noise Visual Interferences Smell Smoke Time at incident occurrence Mission Beginning Mission End Back from Vacations Before Vacations During Vacations Schedule changes Duty Cycle Length Shift-Chg Internal Medecines Alcohol Drugs
Experience	
Controller Radar Non Radar Supervisor Military Limited radar Time Certified in Pos 1 Time Certified in Pos 2 General/total Dispatch FSS Specialist Flight Attendant Total Airline Total Type Maintenance Repairman Technician Lead Technician Avionics Supervisor Flight Time Total Last 90 days in Acft Type	

Person (cont'd)

Factors Adversely Affecting Perf. (cont'd)	Factors Adversely Affecting Perf. (cont'd)
<p>Physiological Factors</p> <ul style="list-style-type: none"> Fatigue Needs <ul style="list-style-type: none"> Hunger, Thirst Natural needs (toilets) <p>Pathological Status</p> <ul style="list-style-type: none"> Sickness, Flu Aches Inching Obvious Incapacitation SUB Incapacitation Vertigo Hypoxia <p>Illusion</p> <ul style="list-style-type: none"> Yehudi Black-Hole White-out Sloping-Ter <p>Disorientation</p> <p>Sociological Factors</p> <p>Internal Factors</p> <ul style="list-style-type: none"> Crew or Team Structure Qualification <ul style="list-style-type: none"> Unqualified Not-Current Occasional manpower shortage Team internal dispute Proficiency <ul style="list-style-type: none"> In-Doubt Learner, beginner Training deficiency Recency-of-Experience Language barrier Familiarity <ul style="list-style-type: none"> ARPT ATC-PROC EQP AREA TERRAIN ACFT-PERF WX AIRSPACE REGS NAVAID ARPT-PROC CHART NEW 	<p>Sociological Factors (cont'd)</p> <p>External Factors</p> <ul style="list-style-type: none"> Bad social environment (Strike) Visitor Instructor Inspector VIP CPNY-BUS <p>Psychological Factors</p> <ul style="list-style-type: none"> Fear, Anguish Personal troubles Personal preoccupations Family troubles Memory loss Madness <p>TASKLOAD</p> <ul style="list-style-type: none"> SGL-PLT COMBO-POS COMBO-SEC CREW-COMPLEMENT <p>PREOCC</p> <ul style="list-style-type: none"> TFC WX-AVD EQP-PROB TRNG-IN-PROG FLTASSIST CHKLST TUNING OTH-TASK SPC-EVENT FUEL <p>ATTITUDE</p> <ul style="list-style-type: none"> UNPROFESS ANTAGON COMPLACENT GETHOME AGGRESS <p>RSCE-DEFIC</p> <ul style="list-style-type: none"> CTRL SUPVR FLC CHART PUB FSS NAVAID ACFT-EQP ATC-EQP ATC-SRVC <p>OTH</p> <ul style="list-style-type: none"> PAX-DISCOMFORT PAX-ILLNESS

Anomaly

Anomaly	
Technical	Loss of control
Acft Eqp Prob Critical Less Severe ATC Com (lost or intermittant) False/Erratic Course Indic. Fuel Exhaustion Inadequate Contamination Type	Ground Excursion Rwy Overrun Rwy Excursion Txwy Excursion Ramp (Gnd Excursion) Other Gnd Loop Stall Spin Hydroplane
Encounters	Maintenance Problem
In-Flt Encounter VFR in IMC VFR over the TOP Weather Turbulence Birds FOB Obstruc Skydivers Wake Turbulence Gnd Encounter FOB Ped Animal Birds Eqp Jet Blast Vehicule	Improper Maintenance Non Compliance with MEL Improper Documentation
	Tkof
	Overweight Tkof
	Landing
	overshot undershot Gear Up Landing Tailstrike Hard Landing Wrong Rwy Wrong Arpt Landing Without Clr Txwy Lndg Overweight Lndg
	Apch
	Wrong Rwy Wrong Arpt Unstabilized Apch
Deviations	Ground Incursion
Speed Dev Alt Dev Overshoot on Clb Overshoot on Dscnt Undershoot on Clb Undershoot on Descnt Excursion Clb Excursion Dscnt Xing Restrict Not Met Acft at Imprud Alt Descent Below/MSA Other Spatial Deviation Track or Hdg Dev Acft on Imprud Track Control. Flt Toward Terrain Unctrl Arpt Tfc Pattern Dev Altitude Heading Rule Deviation Glideslope	taxi runway
	Conflict
	Airborne NMAC Air Less Severe Ground Gnd Severe Gnd Less Severe
	Airspace Violation
	Unauth Incursion Unauth Excursion Uncoord Penetration uncoord Exit

Anomaly (cont'd)	
Non Adhere Legal Rqmt	Cabin Event
Clrnc	Galley Fire
Pub Proc	Passenger
MEL	Misconduct
Wx Mins	Illness
FAR	Contraband
Alt-Hdg	Electronic Device
Alt-Setting	Other
Ster Ckpt	FLC Status
Speed	Hazardous Cargo Problem
Inspec	Smoke or Fire
AD	Fumes
Company Policies	CG Irregularity
Required Legal Separation	Uncoord
Non Comp/Srvc Advsy	Sector Penetration
	Rwy Movement

Conflict
Traffic Mix
ACFT
VEH
VSL
OTH
Flt Regime
GND
TMNL
ENRTE
Event Severity
MIN
MOD
NEAR
Miss Distance
Horizontal Miss
Vertical Miss
Diag/Unspect'd Miss

Transitions

Problematic Human Performances	
Data Collection/Transmission	Decision after treatment
COM INTRA-CKPT INTER-CKPT ATC-FLC CPNY-FLC INTER-FAC INTRA-FAC CKPT-CAB GND-CKPT TECHNIQ OBSERV TFC SPACING ALT HZ-POS ATT SPEED WX EQP-STAT MIS-ID TECHNIQ ARPT LANDMARK RWY TXWY INTXN WALK-AROUND TGT CHK-PT LOST-SIGHT ATTITUDE HEADIN HEADOUT SCAN UTILIZE FLC ATC EQP FSS CHART PUB PF PNF SO DMAN SUPVR CTRLR FLTSTRIP NAVAID STAGE3	PLAN PREFLT INFLT TFC APCH BACKUP TFC-SEQ DECIDE-Y DEP TKOF ABORT RTN AVD-WX GAR DIVERT COMPLY DEVIATE TIMING EMER LNDG MAP CROSS HLD-SHT MTN CLIMB DSCNT TURN AIRHLD TKOF-POS EXER-COM-AUTH DH

Problematic Human Performances (cont'd)

Decision after treatment (cont'd)	Action
DECIDE-N DEP TKOF ABORT RTN AVD-WX GAR DIVERT COMPLY DEVIATE TIMING EMER LNDG MAP CROSS HLD-SHT MTN CLIMB DSCNT TURN AIRHLD TKOF-POS EXER-COM-AUTH DH MANAGE PRIORITIZE ASSIGN DELEGATE DISCARD RQST-INPUT RSPND-INPUT EVALUATE INITIATE MONITOR FAIL-INTERV TERMINATE EARLY LATE DEV-SOP INFLEX INDECISION UNLOAD RECOGNIZE	EQP-USE PROGRAM SWITCH TBLSHOOT SETUP HANDLE MODE-SEL TECHNIQ NAV INSTRUM DEADRECK PILOTAGE TECHNIQ CHK-PT MANIP TKOF CRS APCH LNDG TAXI PATTERN IMC CROSS-WIND TECHNIQ OTHER DEICING

Information Problems

Message origin		Type
PSN	FLC ATC GNDCREW CAB FSS	DATA ALT HZPOS SPEED ATT AIRSPACE
EQP	ACFT ATC SCOPE TAPE	REGS TERRAIN WX ARPT ROUTE
CHART	SECTIONAL WAC PLATES IFR-ENRTE	PROC BRAKING FLT-PLAN STORED HYDRAULICS
PUB	ATC-HD-BOOK AIM FARS FOM MEL NOTAM BULLETIN LOA DIRECTIVE	FUEL ACS-STATUS ELECTRICAL PRESSURIZATN WT-BAL
OTH	NOTES FLT-PROG-STRIP DISPATCH LOG	ADVSY CALLOUT POINTOUT TFC WX AIRMET SIGMET PIREP
Destination		CHKLIST CHALLENGE RESPONSE
PSN	FLC ATC GNDCREW CAB FSS	SQUAWK 1200 7500 7600 7700
OTH		INSTRUC CLRNC AMENDED CANCELLED EXPEDITE
Media		TAPED ATIS TWEBS
DIR	VIS AUD GESTURE	FEED-BK CONFIRM READBACK ACKNOW
GND-EQP	TPHONE IPHONE INTER INTRA COMPUTER	QUERY RQST PERMSN
RDO	CTAF UNICOM	PROC FREQ-CHG LOST-COM
WRITTEN	LOG	

Information Problems (cont'd)

Type (cont'd)	Problems (cont'd)
COORD	EQP
HDOFF	GND
BRIEFG	AIR
MANUAL	OTS
INTENT	WEAK
OTH	INTERMITTENT
IN-BLIND	ENVIRON
ABBRV	FREQ-BLOCK
RELAY	SIMUL-XMISSN
Reference Phase	RANGE
GND	STEEPED-ON
DEP	NOISY
CRS	AUD-INTERF
ARR	VIS-INTERF
MNV	FREQ-CONGEST
OTH	FREQ-LAP
Problems	RECEPTN
CONTENT	WRNG-FREQ
FALSE	NOT-OBS
INCOMPL	NOT-MON
AMBIG	NOT-HEARD
MISLEAD	MISSED
IMPRUD	INADEQUATE-DISSEM
CONFUS	INTERP
TIMING	MIS-INTERP
NEVER	MINDSET
EARLY	CALLSIGN
LATE	NAME
OTH-PRIORITY	NUMBER
XPRESSN	LANGUAGE-BARRIER
SIM-SND	RESPONSE
SIM-LOOK	DENIED
PHRASEOLOGY	REFUSED
TRANPOS	NON-COMPLY
MISSTATE	UTILIZN
CALLSIGN	FORGOT
NAME	DEGRADED
NUMBER	OTH
VOX-QUAL	GARBLED
ENNUNC	INTERMITTENT
CLUTTER	LOST-COM
WRNG-FREQ	
SPCH-RATE	
LANGUAGE-BARRIER	

ATC-HANDLING	
Clrnc	Coord
Imprud	Untimely
Misdirected	Imprud
Misstated	Misstated
LTSS Permitted	Misdeirected
Uncoord	Non
Sector Penetration	Briefing or relief
Rwy Movement	Flt Prog Strip
Advsvy	Not Posted
Safety not sent	Late Posting
Tfc not sent	Not marked
Wx Not sent	Improper Mrkng
	Not Scanned
	Nonstandard Phraseology
	Flt Plan Handling

Misrepresentation
Ext.Environment Mod
Flight Mechanics Mod
Load./Spec. Eqpt Mod
MELMod
3D trajectory Mod
Risk Mod
Structure Mod
Press/AirCond Sys Mod
Flight Auto Sys Mod
FMS Mod
Communicat. Sys Mod
Electrical Sys Mod
Auxiliary Eqpt Sys Mod
Flight Controls Sys Mod
Fuel Sys Mod
Hydraulic Sys Mod
Rain/Ice Sys Mod
Landing Gear Sys Mod
Navigation Sys Mod
Oxygene Sys Mod
Auxi.Power Sys Mod
Powerplant Sys Mod

Operational System Fault
Organisation
responsability
Carrying out
Means
Drills
Design
Basic Design
Mechanical ergonomy
Mental Ergonomy
Education
Basic Education
Specific Education
Documentation
Physical faults
Wrong content
Requirements

Resolatory Event	
Independant Detector	Resolatory Action (cont'd)
Cockpit <ul style="list-style-type: none"> Flight Crew Aircraft Equipment <ul style="list-style-type: none"> Altitude Alert TCAS GPWS Lite Vox Sound 	Flight Crew <ul style="list-style-type: none"> Avoid-Evas Action Exec. GAR or Missed Apch Regained Acft Control Overcame Equip Problem Aborted Tkof Became Reoriented Ret. Original Cirnc/Course Exec. Lost Com Procedure Declared Emergency Perf. Expedited Maneuver PNF Interv/Siezed Controls PNF Interv/Other Exerc. of Command Autho. Prepared for Ditching Executed a 180 Executed a 360 Dumped Fuel Man. Out Penetrated Airsp Man. Out Adverse Env Abandoned Apch Returned to land Diverted to Alternate Forced Landing Landed Off Arpt Ordered Evacuation Precautionary Landing Evacuated (Aircraft) Landed as precaution Diverted to Another Airport Returned to Assigned Airspace Returned to Assigned Altitude Landed in Emergency Condition Overrode Automation Fire Extinguished
ATC	
Controller <ul style="list-style-type: none"> ATC Equipment <ul style="list-style-type: none"> MSAW Conflict Alert OEDP 	
Resolatory Action	
Controller <ul style="list-style-type: none"> Intervened Issued New Clearances Declared Emergency Ordered Expedited Man. Gave DF Steer Activated Crash Alert Separated Traffic Provided Flight Assist Issued Advisory Issued Alert 	
Aircraft <ul style="list-style-type: none"> Automation Overrode Flt Crew Equip. Prob. Dissipated 	
None taken <ul style="list-style-type: none"> Unable Anomaly Accepted Detected After-The-Fact Insufficient Time 	

Other

<i>Record Control</i>
Accession Number
Coding Form
Coding Status
Multiple Report Flag
SGL
MUL
Analyst Graphic
Y
N
Source
NF
ANONOM
Reporter's ACN
Receipt date
Reporter Graphics
Response to Reporter
Analyst Callback
Completed
Attempted
None

<i>Air Traffic Incident</i>
Air Traffic Incident
NMAC
Operational Error
Operational Deviation
Other ATC Handling
Pilot Deviation
Military facility deviation
Intra Facility Coordination Failur
Inter Facility Coordination Failur
Declared Emergency
FLT-ASSIST
SPILL-IN
SPILL-OUT

General Assesments	
Type of event	Problem Areas
Unique Event	Performances
Recurrent Event	Flight Crew Human Performance
Unwanted Situation	ATC Human Performance
Special Handling	Cabin Crew Human Performance
ROU	Maintenance Human Performance
ABR	Passenger Human Performance
OHN	Procedures-Policies
FYI	ATC
TEL	ARPT
RCC	ACR
MMW	MIL
Primary Problem	Company
ATC Human Performance	FAA
Cabin Crew Human Performance	Documentation
Flight Crew Human Performance	Chart
Passenger Human Performance	Publication
Aircraft	Regulation
ATC Facility	Design
Airport	Airspace Structure
Navigational Facility	Aircraft
Airspace Structure	Airport
Company	Equipments
FAA	ATC
Chart or Publication	NAVAID
Chart or Publication	Aircraft
Environmental Factor	Environmental Factors
Weather	Weather
Ambiguous	IFE
Special Educational Value	Preocupation
Y	Diversion
N	Traffic
Ranked Severity	Conflict
Number (0 to 10)	Preocupation

Situation	
GEN-SIT	FAA-POL
Acft Type or Class	See and Avoid
Aircraft Design	Fac Staffing
Equipment	Keep 'em High
Airframe	Enforcement
Engine	Flow Control
Chart	Noise Abatement
Publication	Non Radar Proc
An Intxn Name/Other Name	Criteria
Design	Wx Observ
Airspace	Separation
Route	Certification
Physical Facility	FLC
ATC	Ctrl
Arpt	Equipment
NAVAID	Oth Psn
TFC Performance Mix	Info Dissemination
Procedure or policy	Chartered Procedure
ATC Fac	Arr
Arpt	Dep
Company	Other
FAA	Twr-Enroute Ctrl
NAVAID	Equipment
FAR	Transpondeur
CPNY-POL	Oth
Alt Callout	Training
Alt Rptg	FLC
Crew Scheduling	Oth
Mntc Scheduling	Air Carrier Inspection
Push-Bk	Sterile Ckpt
Pwr-Bk	Emergency
Deicing	
Loading Procedure	
Info Dissemination	
Emergency	
Schedule Adherence	
Fuel Conservation	

Adverse Interactions	
Interpersonal	Coord. within and between facilities
Intra-Ckpt Inter-Ckpt Intra-Fac Inter-Fac Supvr-Ctrl Ctrl-Oth FLC-ATC FLC-CAB FLC-GND FLC-DISP FLC-FSS FLC-CENR FLC-CHKPLT FLC-Oth Oth-Oth Labor Relations	IntraFac Twr TRACON ARTCC FSS IMilFac InterFac Twr-Twr Twr-TRACON Twr-ARTCC Twr-FSS Twr-MilFac TRACON-TRACON TRACON-ARTCC TRACON-FSS TRACON-MilFac ARTCC-ARTCC ARTCC-FSS ARTCC-MilFac FSS-FSS FSS-MilFac MilFac-MilFac

Consequence
FAA/ATC
Investigated Assigned or threatened Penalties Reviewed incident with Flt Crew
Other
Physical Injury Emotional Trauma Acft Damaged Tail Skid Wing Tip Undercarriage Propeller Tires Fire Company Review Flight Canceled Stranded Maintenance Action Violation Not Pursued

Appendix E: Situation Awareness

E-1. Introduction

In Section 9 of this report, we proposed that Behavior in our definition of Scenario is always associated with loss of Situation Awareness. It is important that the reader differentiate this from a similar term that is often used in related literature, Situation Assessment. Situation Assessment is used in contexts that are slow, deliberate, strategic, and search-oriented. Situation Awareness is used in the context of events, processes, and interactions that are fast, event-driven, and tactical or reactive.

Situation Assessment would be an appropriate term to use, for example, if a management team were considering a large, long-term investment in a foreign country, perhaps the construction of new manufacturing facilities. They would be well advised to gather data and to carry out systematic statistical projections related to such topics as employment patterns, vocational performance, education, technology development, drug abuse, disease, and security. They might even have an opportunity to employ sophisticated data-fusion methods and other problem solving techniques to place their decisions and actions on a rational footing.

Situation Awareness (SA) is concerned with a completely different set of issues: the operational state of an expert human performer in a dynamic and potentially dangerous environment. In this report, we are considering pilots and air-traffic controllers operating in the global civil aviation environment. Other studies of SA have focused on challenging military operations, such as command and control in joint-operations combat. Still others have studied automobile drivers, anesthesiologists, space mission ground-controllers, and firefighters.

To make progress on the analysis and measurement of Behavior, it is necessary to break SA down into more concrete and constructive components. Fortunately, we can draw on an extensive SA research literature. A number of previous studies have highlighted levels or stages of SA that are closely related to our list of discriminating components: Detection, Recognition, Interpretation, Comprehension, and Prediction (DRICP). Furthermore, we can draw on the extensive research literature in related domains of human factors, expert performance, and behavioral decision theory.

These components of SA can be further defined as follows:

Detection is the act of discovering, discerning, or capturing attention as this is related to the existence, presence, or fact of an event. To be detected, event **E** must entail a change above threshold or a change from adaptation level, though **E** does not have to be assigned to a more abstract class or type. Balakrishnan (1998) provides a discussion of detection and the important related concept of *vigilance*. The vigilance-detection paradigm can be seen as the most elementary setting for Situation Awareness in which adequate performance is defined simply as noticing and responding to changes from baseline stimulation. (We note that *simple* does not mean *easy* – pure vigilance tasks are notoriously difficult and error-prone.)

Recognition is the act of relating a detected event **E** to a class or type of event that has been perceived before. Event **E** can be assigned to an event type when it is perceived as a recurrence of something experienced previously. Richman et al. (1996) discuss the

central importance of recognition in expert performance. Expertise, in general, and expert-level Situation Awareness, in particular, depend on the acquisition of reliable and nearly automatic domain-specific skills of recognition.

Interpretation is the act of relating a specific event type to a network of actual and possible events of various other types. Event **E** cannot only be assigned a class, but it can also be related to other classes of event types within a conceptual structure. Ericsson and Kintsch (1991) have described these kinds of conceptual structures as *long-term working memory* (LTWM) and have presented experimental evidence for the central role of LTWM in experts' interpretation of domain-specific events.

Comprehension is the act of perceiving the significance of an event. Event **E** not only can be assigned a place within a logical or categorical paradigm, but can also be understood in terms of its role in a familiar temporal pattern of events. The pattern may enable an expert to infer past events that must have caused **E**, or future events that must follow from **E**, or concurrent events that must accompany **E**.

Prediction is the act of forecasting what will happen in the near future. Event **E** is understood as part of a predictable sequence, so that specific future events are expected based on the occurrence of **E**. In many domains, including aviation, experts typically stay "ahead of the curve" by actively predicting and preparing for plausible continuations.

The aim of this Appendix is to provide pointers into the research literature on SA, and to explain briefly how our technical approach, described in Section 9, relates to previous work. We will also be as explicit as possible about the boundary conditions and limitations of our approach, acknowledging that our simplifications will have to be corrected through future research.

E-2 - Situation Awareness, Prediction, and Active Cognition

Humans are limited in the amount and kinds of information they can process, and in the speed with which they can process it. Highly trained professionals -- pilots, physicians, firefighters -- can get into situations in which the apparent information-processing requirements exceed human abilities. Yet experts usually perform reliably in these kinds of environments. How is this possible?

The lowest level of SA involves detecting and recognizing low-level attributes and dynamics of objects and events. The second level involves interpreting and comprehending the situation based on knowledge of significant, but more abstract, relations among the recognized elements. This level of interpretation and comprehension relates concrete objects and events to operational goals in ways that go beyond the data that are concretely available. The third level of prediction requires the ability to project the near-term course of events into the future. This highest level achieves closed-loop behavior via continuous perception of situation elements in relation to goals, threats, resources, actions, and consequences. The key factor in many types of expert performance seems to be what Jones and Endsley (1996) have called "Level 3 SA," that is, prediction or mental projection, "*a very demanding task, which people generally perform poorly*" (p. 508). Expert knowledge can be defined, in large part, as a set of pre-compiled memory structures and specialized cognitive retrieval processes that, together, implement predictions of likely event-sequences, including adaptive responses. There is no mystery to the pre-compilation process: it is simply the outcome of many years of formal training and professional experience. [Ericsson, (1996), pp.10-11; Richman et al., (1996), pp. 172ff].]

Prediction is the acid test of a scientific theory and is one of the major goals of applied science. Elaborate causal models and statistical methods are used to try to predict earthquakes, storms, climate change, and the time-course of epidemics. Prediction is also at the core of active learning strategies that are advocated by instructors to improve students' skills in reading, listening, mathematics, and test-taking. The ability to predict has obvious practical value in avoiding or mitigating the effects of unfavorable events, but it is also instrumental in effective cognitive performance. An orientation toward active prediction is the hallmark of cognitive engagement in an on-going task. Thus, prediction is a key component of all kinds of individual and collective expertise, and is perhaps the most important theoretical link between research on SA and research on learning and expertise.

E-3 - Situation Awareness Research

Jeannot (2000); [see also van Gool et al., (2002)] summarizes the Human Factors research on SA, emphasizing cognitive aspects such as mental models, long term memory, working memory, workload, and human-automation interaction, with special emphasis on the nature of SA in air traffic control [cf. Gronlund et al., (1998)] He states:

“In many, if not all, of the controller cognitive models, maintaining Situation Awareness is the core sub process, the basic background activity to air traffic control. The importance of ‘background activity’ is recognized as critical by [controllers] themselves. They refer to this phenomenon as ‘having the picture’. For controllers, ‘having the picture’ is the first pre-requisite to handling their traffic.... ‘Losing the picture’ is reported as one of the biggest risks for controllers, as it is the source of several risks: The controller

is no longer able to predict the evolution of the situation,

fails to detect early enough a problem or a conflict,

does not choose the optimum resolution,

and, in extreme cases, allows the creation of incidents or accidents.”

Domain-specific representations help to maintain SA via “cognitive economy.” [Endsley (2000a)] Only when information on position and altitude is insufficient for conflict detection will controllers look for other sources of information, and then they operate in predictive mode, anticipating the situation and working ahead. The more experienced the controller, the more selective his or her mental model becomes, even to the point of being “inaccurate” or “distorted” – but in ways that promote effective performance. [Gronlund et al. (1998)] Less experienced controllers have more concrete details available about traffic. They tend to “focus on every aircraft,” whereas experts classify aircraft into two groups: “those requiring further analysis and those which can be separated safely immediately.”

Patel, et al. (1996, pp. 130ff.) provide an instructive discussion of active information-seeking in the context of medical expertise. They describe four stages of information processing called observations, findings, facets, and diagnosis. Observations are raw data at our detection/recognition (D/R) level. Findings are interpretations (I) of data, and facets are clusters of related findings. Diagnosis corresponds to our comprehension (C) level and constitutes the basis for predicting (P) the future (prognosis). Facets play an active role in organizing multiple competing interpretations, directing the search for additional data (findings) to resolve pending

issues, and providing the building blocks for a satisfactory diagnosis. In-depth exploration of expert performance shows that even the cyclical model is an over-simplification. [cf. Frederiksen & White (1990)] The more highly skilled the expert performer, the more flexibly he or she moves among different knowledge representations and different levels of processing.

Different levels of proactive engagement in the dynamic control task characterize different levels of expertise. Cognitive engagement, prediction, and effective control are interrelated. This is one of the reasons why automation can sometimes undermine SA, producing

- loss of vigilance
- increase in complacency
- change from active to passive processing
- loss of or a change in the type of feedback.

Automation can also become the object of SA itself, in that more experienced operators develop skill in predicting the future behavior of automated systems. [Jodlowski et al. (2002)] Operators' SA regarding automated systems is in turn influenced both by training [Endsley & Robertson (2000)] and by display design. [Kelley (2002)] Understanding automation can be defined, in part, as the avoidance of "automation surprises." Avoiding surprise is the same as being able to predict what will happen next if a certain input is provided to the automation. [Woods et al (1994)] This human-automation interaction is further complicated by the fact that the automated system has its own SA of the state of its portion of the world.

In addition to automation effects, the management of SA in aviation and other environments can be complicated by factors such as distributed roles and responsibilities, which create the need for shared SA (among multiple human and non-human agents), and by mobility of the agents who must maintain this shared SA. Artman & Garbis (1998) and Stroeve et al. (2003) show how an initially safe situation can evolve into an unsafe one via divergent SA among the operators of the system. Johnston et al.(1997) emphasize the need for process analysis in addition to outcome measurement (i.e., the *why* in addition to the *what* in the terminology of this report). Individual and team processes interact in determining overall SA.

Taking an even broader perspective, Woods et al. (1994) [cf. Cook & Woods (1994)] and Moray (1994) place SA in the context of human-systems analysis and research on human error as a systems problem. Cook and Woods point out the multifaceted nature of SA – control of attention, mental simulation, directed attention, contingency planning, and mental bookkeeping. In general, any multitasking environment requires shifts of attention among different threads, and coordinating these shifts requires a coherent system-model or situation-model.

E-3 - The Cyclic Nature of SA

In our simplified model of Behavior, we use the DRICP framework of SA as though Detection, Recognition, Interpretation, Comprehension, and Prediction occur in sequential order, each successive stage using the output of the preceding stage. However, as Carroll et al. (2001) document, citing Neisser (1976), human cognition is a cyclic process in which prediction facilitates comprehension and interpretation, and in which comprehensible and interpretable events are more easily detected and recognized than are unpredictable and incomprehensible events. In fact, Jones and Endsley (1996) point out that some Level 2 SA errors (for example,

misinterpretation of landmarks) can be attributed to incorrect expectations (erroneous predictions), which then cause a persistent misrecognition and misinterpretation of perceptual data.

Figure E-1 from Neisser (1976), which we borrow from Carroll et al. (2001), illustrates the more complex model of active information seeking. Experts' skilled performance [Richman et al. (1996)] as well as their characteristic susceptibility to certain kinds of errors [Cook & Woods (1994); Jones & Endsley (1996)] can be best understood as a knowledge-driven, prediction-oriented cognitive process, not as a data-driven, passive, perceptual one.

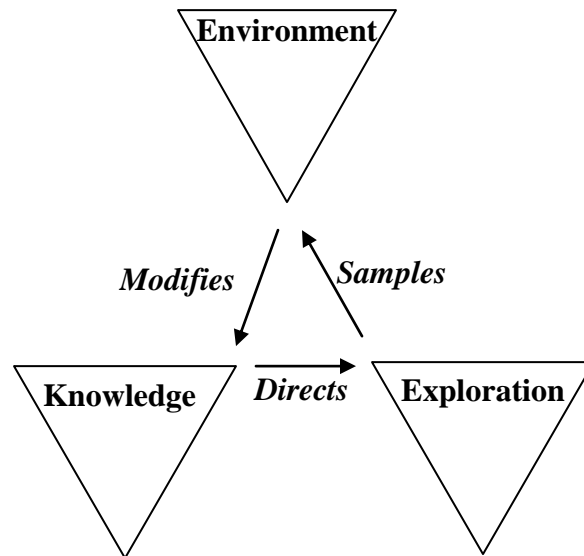


Figure E-1 - The Perception-action Cycle [Neisser (1976)]

References

- Artman, H., & C. Garbis. (1998). Situation Awareness as Distributed Cognition. In *T. Green, L. Bannon, C. Warren, J. Buckley (Eds.) Cognition and cooperation. Proceedings of 9th Conference of Cognitive Ergonomics*, Limerick, Ireland, 151-156.
- Balakrishnan, J.D. (1998). *Measures and Interpretations of Vigilance Performance: Evidence Against the Detection Criterion*. *Human Factors*, 40, 601-623.
- Carroll, J.M., D.R. Dunlap., P.L. Isenhour., D.S. McCrickard, D.C. Neale., & M.B. Rosson. (2001). *Activity Awareness in Computer-Supported Collaboration*. Virginia Tech Center for Human-Computer Interaction, Blacksburg, VA
- Cook, R.I., & D.D. Woods. (1994). Operating at the Sharp End: The Complexity of Human Error. In *M.S. Bogner (Ed.), Human Error in Medicine*. Mahwah, NJ: Lawrence Erlbaum.
- Endsley, M.R. (2000a). Theoretical Underpinnings of Situational Awareness: A Critical Review. In *M.R. Endsley & D.J. Garland (Eds.) Situation Awareness Analysis and Measurement*. Mahwah, NJ: Lawrence Erlbaum Associates.
- Endsley, M.R., & Robertson, M.M. (2000). Training for Situation Awareness. In *M.R. Endsley & D.J. Garland (Eds.), Situation Awareness Analysis and Measurement*. Mahwah, NJ: Lawrence Erlbaum.

- Ericsson, K.A. (1996). The Acquisition of Expert Performance: An Introduction to Some of the Issues. In K.A. Ericsson (Ed.), *The Road to Excellence: The Acquisition of Expert Performance in the Arts and Sciences, Sports and Games*. Mahwah, NJ: Lawrence Erlbaum.
- Ericsson, K.A., & W. Kintsch. (1991). *Memory in Comprehension and Problem Solving: A Long-term Working Memory*. Publication Number 91-13. Boulder, CO: Institute of Cognitive Science, University of Colorado.
- Frederiksen, J., & White, B. (1990). Intelligent Tutors as Intelligent Testers. In N. Frederiksen, R. Glaser, A. Lesgold, & M. Shafto (Eds.), *Diagnostic Monitoring of Skill and Knowledge Acquisition*. Hillsdale, New Jersey: Lawrence Erlbaum Associates, , 1990, 1-25.
- Gronlund, S.D., D.D. Ohrt, M.R.I. Dougherty, J.L. Perry, & C.A. Manning. (1998). *Aircraft importance and its relevance to situation awareness*. DOT/FAA/AM-98/16. Washington, DC: Office of Aviation Medicine.
- Jeannot, E. (Dec., 2000). *Situation Awareness, Synthesis of Literature Research*. EEC Note No. 16/00. European Organisation for the Safety of Air Navigation. Eurocontrol Experimental Centre, Bretigny-sur-Orge, France.
- Johnston, J.H., K.A. Smith-Jentsch, & J.A. Cannon-Bowers. (1997). Performance Measurement Tools for Enhancing Team Decision-making Training. In M.T. Brannick, E. Salas, & C. Prince (Eds.), *Team Performance Assessment and Measurement*. Mahwah, NJ: Lawrence Erlbaum.
- Jones, D.G., & M.R. Endsley. (1996). Sources of Situation Awareness Errors in Aviation. *Aviation, Space, and Environmental Medicine*, Vol. 67, No. 6, 507-512
- Jodlowski, M.T., S.M. Doane, & Y.W. Sohn. (2002). Mental Models, Situation Models, and Expertise in Flight Situation Awareness. In *Proceedings of the Human Factors and Ergonomics Society, Annual Meeting*
- Kelley, T. (2002). Predicting Situation Awareness Errors Using Cognitive Modeling. In *Proceedings of the Ninth Annual ACT-R Workshop and Summer School*. Pittsburgh, PA : Carnegie Mellon University.
- Moray, N. (1994). Error reduction as a systems problem. In M.S. Bogner (Ed.), *Human Error in Medicine*. Mahwah, NJ: Lawrence Erlbaum.
- Neisser, U. (1976). *Cognition and Reality*. San Francisco: Freeman.
- Patel, V.L., D.R. Kaufman, & S.A. Magder. (1996). The Acquisition of Medical Expertise in Complex Dynamic Environments. In K.A. Ericsson (Ed.), *The Road to Excellence: The Acquisition of Expert Performance in the Arts and Sciences, Sports and Games*. Mahwah, NJ: Lawrence Erlbaum.
- Richman, H.B., F. Gobet, J.J. Staszewski, & H.A. Simon. (1996). Perceptual and Memory Processes in the Acquisition of Expert Performance: The EPAM model. In K.A. Ericsson (Ed.), *The Road to Excellence: The Acquisition of Expert Performance in the Arts and Sciences, Sports and Games*. Mahwah, NJ: Lawrence Erlbaum.
- Stroeve, S., H. Blom, & M. van der Park. (2003). Multi-agent Situation Awareness Error Evolution in Accident Risk Modeling. In *Proceedings 5th USA/Europe ATM R&D Seminar*, Budapest, Hungary.

van Gool, M. et al. (2002). *Human Performance Metrics*. EUROCONTROL Reference: CARE/ASAS/VF-NLR/WP3/D5/02-034.

Woods, D.D., L.J. Johannesen, R.I. Cook, & N.B. Sarter. (1994) *Behind Human Error: Cognitive Systems, Computers, and Hindsight*. CSERIAC SOAR 94-01, Wright-Patterson Air Force Base, OH: Information Analysis Center.